

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	682.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	89.8V x 141.5H
	At 50% of Imax	44.4V x 91.0H
	At 90% of Imax	33.7V x 36.2H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	936.6 lumens per klm.
	To 50% of Imax	607.0 lumens per klm.
	To 90% of Imax	180.8 lumens per klm.

Upward LOR	1.8 %
Downward LOR	98.2 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.12V I:0.7515A P:6.000W PF:0.6587 Freq:59.98Hz Lamp Flux:324.012x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light RGBWEIGHT:	
SPEC.:6W 2700K Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

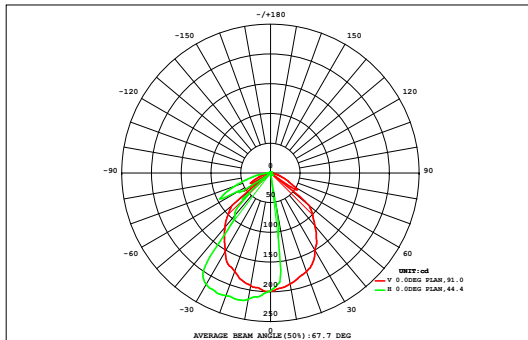

DATA OF LAMP		Eff:54.01lm/W	
MODEL	A9A3-6W-BZ	Imax (cd)	221.1
NOMINAL POWER (W)	6	AVAILABILITY (%)	91.9
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	297.7
NOMINAL FLUX (lm)	324.012	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	324.0
TEST VOLTAGE (V)	12	θ @50% (H,V)	91,44DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.10	0.00
90	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.10	0.00
80	0.00	0.00	0.02	0.03	0.06	0.08	0.08	0.06	0.02	0.02	0.06	0.09	0.09	0.08	0.05	0.02	0.01	0.00	0.77	0.00
70	0.00	0.01	0.05	0.12	0.20	0.24	0.23	0.16	0.06	0.06	0.16	0.22	0.23	0.19	0.13	0.06	0.02	0.00	2.14	0.00
60	0.00	0.02	0.11	0.24	0.37	0.30	0.23	0.13	0.06	0.09	0.22	0.40	0.46	0.36	0.23	0.11	0.03	0.00	3.37	0.11
50	0.00	0.04	0.18	0.38	0.31	0.36	0.62	0.64	0.30	0.29	0.64	0.63	0.45	0.59	0.37	0.17	0.05	0.00	6.02	3.42
40	0.00	0.06	0.25	0.35	0.41	1.18	1.39	1.10	0.46	0.45	1.09	1.36	1.19	0.52	0.54	0.24	0.07	0.01	10.7	9.31
30	0.00	0.08	0.32	0.36	0.96	1.86	2.02	1.66	0.67	0.66	1.64	2.00	1.81	0.99	0.62	0.31	0.08	0.01	16.0	15.1
20	0.00	0.10	0.37	0.32	1.64	2.46	2.92	2.63	1.22	1.20	2.62	2.88	2.43	1.64	0.55	0.37	0.10	0.01	23.4	22.8
10	0.01	0.11	0.39	0.40	2.08	3.09	4.04	4.34	4.49	4.46	4.28	4.00	3.06	2.03	0.64	0.42	0.10	0.01	37.9	37.5
0	0.01	0.11	0.41	0.42	2.15	3.42	4.75	5.62	6.14	6.11	5.56	4.71	3.39	2.10	0.65	0.44	0.11	0.01	46.1	45.7
-10	0.01	0.11	0.45	0.38	1.79	3.21	4.84	5.79	6.43	6.41	5.78	4.80	3.17	1.79	0.61	0.45	0.11	0.01	46.1	45.7
-20	0.00	0.10	0.44	0.53	1.05	2.57	4.24	5.72	6.44	6.43	5.69	4.22	2.52	1.07	0.79	0.43	0.10	0.01	42.4	41.9
-30	0.00	0.09	0.39	0.68	0.54	1.52	2.68	3.84	4.86	4.85	3.82	2.64	1.53	0.65	0.87	0.38	0.09	0.01	29.4	28.9
-40	0.00	0.07	0.31	0.80	0.86	0.59	0.87	1.54	1.82	1.82	1.54	0.88	0.69	1.14	0.79	0.31	0.08	0.00	14.1	13.0
-50	0.00	0.04	0.22	0.59	1.14	1.37	1.24	0.90	0.77	0.80	0.99	1.41	1.53	1.13	0.57	0.22	0.05	0.00	13.0	12.0
-60	0.00	0.03	0.13	0.35	0.70	1.17	1.68	2.09	2.33	2.33	2.09	1.67	1.16	0.69	0.35	0.14	0.03	0.00	16.9	16.1
-70	0.00	0.01	0.05	0.15	0.31	0.52	0.75	0.98	1.16	1.16	0.98	0.76	0.53	0.32	0.16	0.06	0.01	0.00	7.93	5.89
-80	0.00	0.00	0.01	0.03	0.06	0.10	0.15	0.20	0.24	0.24	0.20	0.15	0.11	0.06	0.03	0.01	0.00	0.00	1.60	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	0.05	0.98	4.10	6.13	14.6	24.0	32.7	37.4	37.4	37.4	37.4	32.8	24.4	15.4	7.99	4.16	1.06	0.08	318	---
Φ a	0.00	0.00	2.94	4.46	13.1	22.8	31.6	36.3	36.0	35.9	36.2	31.6	23.1	14.1	6.73	2.88	0.00	0.00	---	298


one-half-peak spread: U:14.6,D:23.0 , L:38.1,R:41.1 NEMA Beam Type: Type 7 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.12V I:0.7515A P:6.000W PF:0.6587 Freq:59.98Hz Lamp Flux:324.012x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W 2700K Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

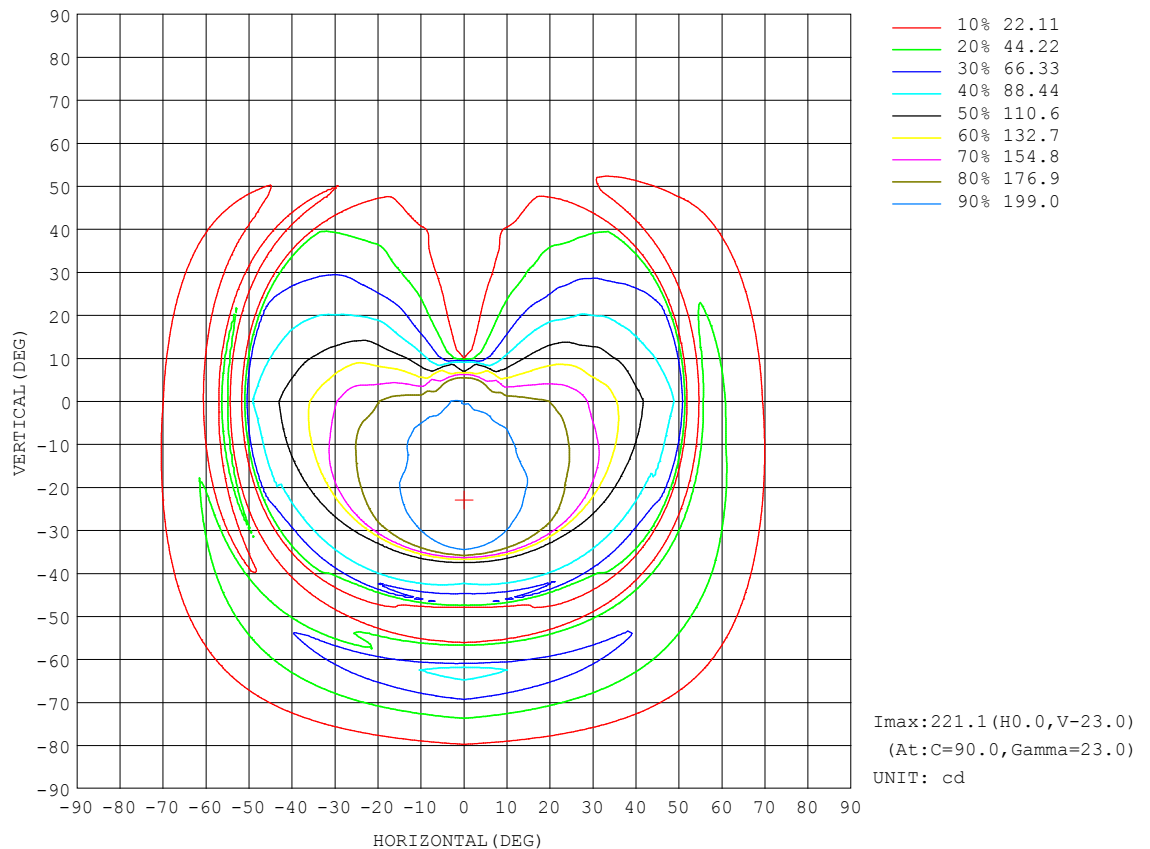


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.12V I:0.7515A P:6.000W PF:0.6587 Freq:59.98Hz Lamp Flux:324.012x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W 2700K Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

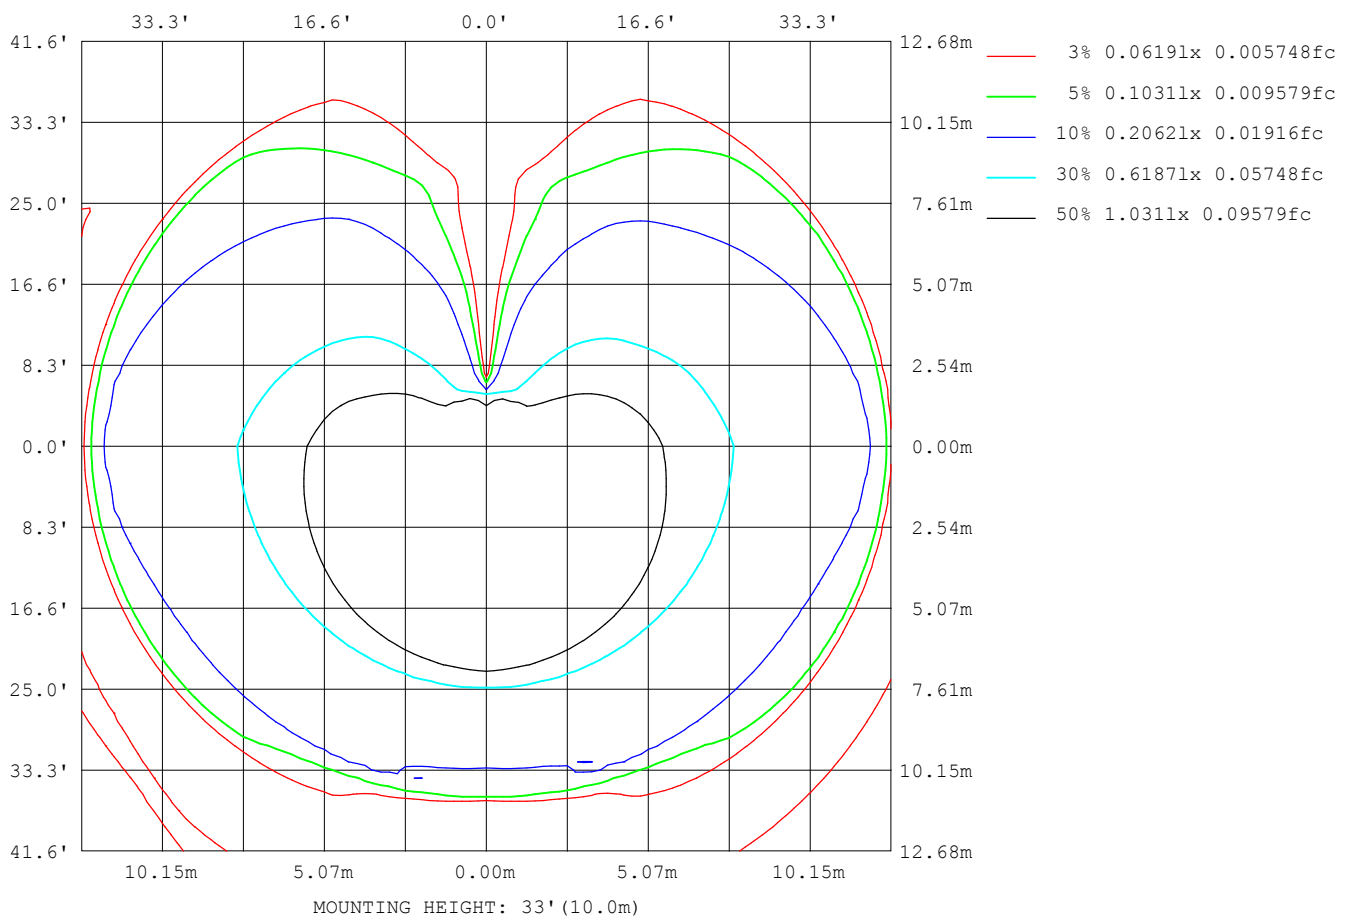

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

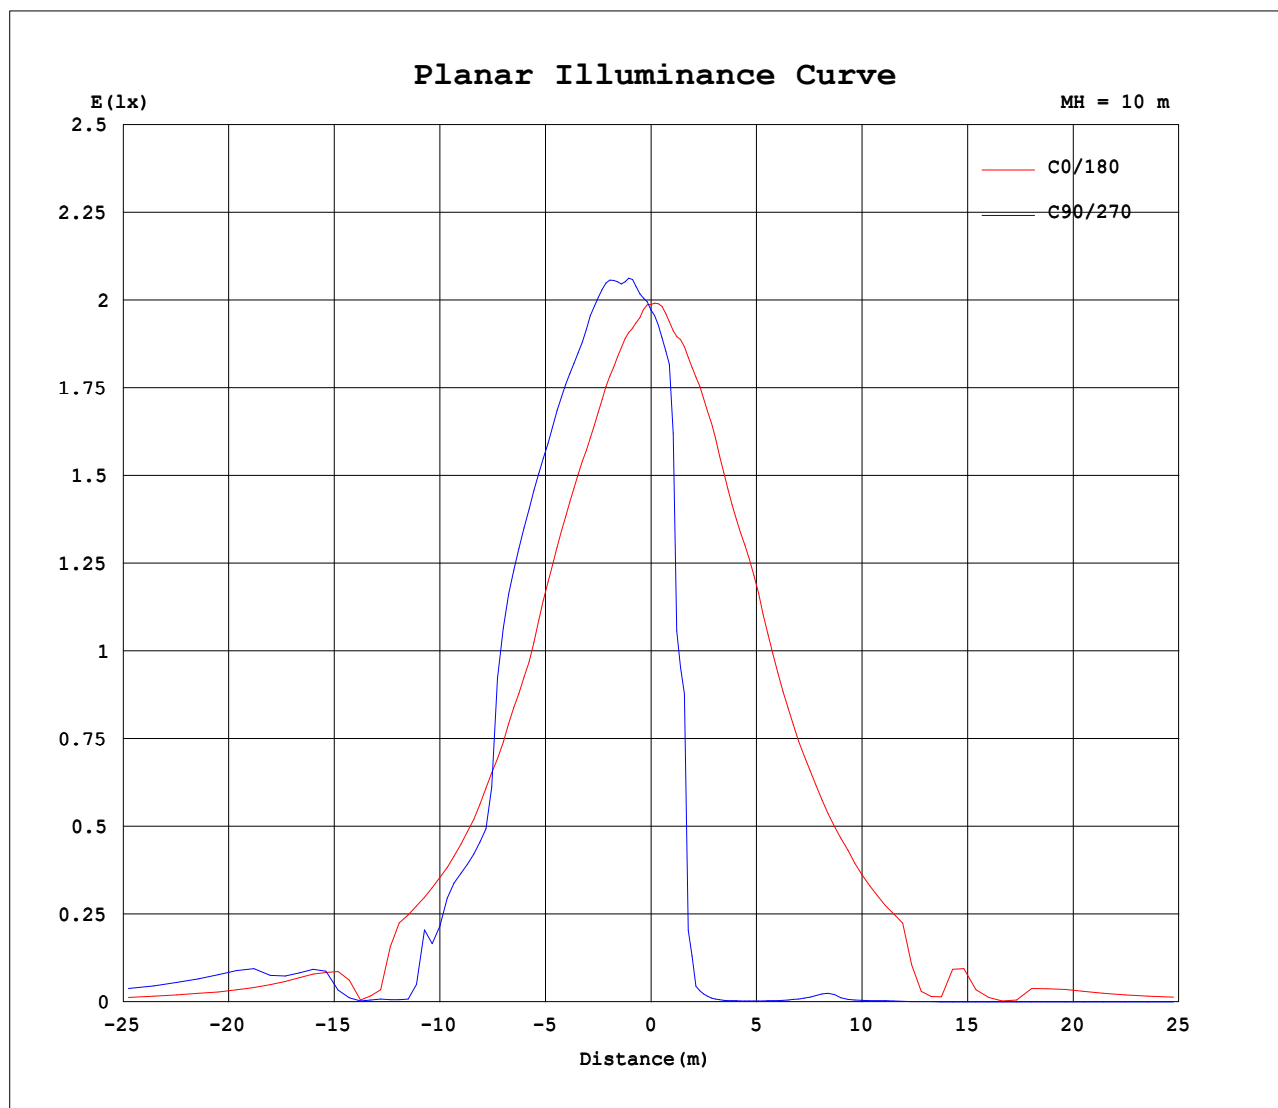


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.12V I:0.7515A P:6.000W PF:0.6587 Freq:59.98Hz Lamp Flux:324.012x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light RGBWEIGHT:	
SPEC.:6W 2700K Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

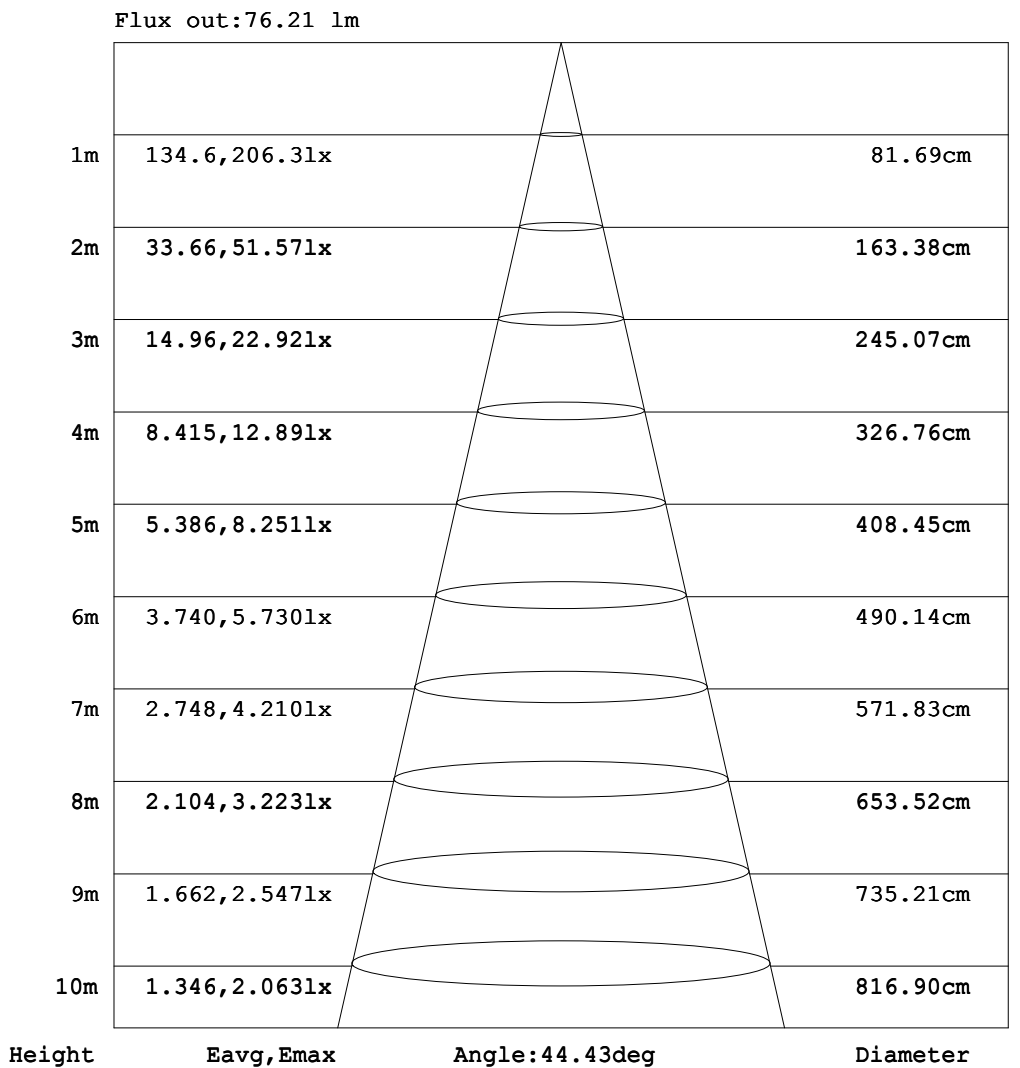

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.7515A P:6.000W PF:0.6587 Freq:59.98Hz Lamp Flux:324.012x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W 2700K Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.54	0.57	0.63	0.32	0.87	0.59	0.78	0.97	1.16	1.32	1.48	1.67	1.84	2.02	1.79	2.27	2.22	2.11
-170	0.00	0.53	0.57	0.63	0.32	0.87	0.62	0.83	1.02	1.19	1.34	1.45	1.60	1.71	1.79	1.87	1.77	1.91	1.85
-160	0.00	0.53	0.56	0.62	0.31	0.60	0.92	0.82	1.00	1.18	1.32	1.41	1.48	1.57	1.63	1.60	1.60	1.60	1.54
-150	0.00	0.52	0.56	0.61	0.55	0.40	0.91	0.74	0.95	1.14	1.26	1.37	1.45	1.46	1.49	1.52	1.53	1.52	1.50
-140	0.00	0.51	0.55	0.59	0.61	0.35	0.46	0.94	0.79	0.99	1.16	1.30	1.39	1.46	1.52	1.57	1.60	1.61	1.63
-130	0.00	0.49	0.53	0.54	0.59	0.61	0.38	0.48	0.88	0.99	0.90	1.07	1.22	1.35	1.46	1.54	1.59	1.65	1.70
-120	0.00	0.47	0.51	0.53	0.54	0.57	0.59	0.60	0.43	0.50	0.59	0.88	0.96	1.04	1.08	1.10	1.17	1.24	1.29
-110	0.00	0.43	0.48	0.50	0.51	0.51	0.51	0.53	0.55	0.56	0.56	0.58	0.56	0.50	0.56	0.60	0.63	0.66	0.68
-100	0.00	0.32	0.42	0.45	0.46	0.46	0.46	0.45	0.45	0.46	0.45	0.44	0.43	0.42	0.42	0.41	0.40	0.39	0.38
-90	0.00	0.01	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19	0.20
-80	0.00	0.03	0.20	0.65	1.27	2.02	2.98	4.13	5.48	7.00	8.69	10.5	12.3	14.1	15.9	17.5	19.0	20.3	21.4
-70	0.00	0.11	0.87	2.01	3.70	6.18	9.54	13.5	17.8	22.5	27.3	32.3	37.5	42.6	47.6	52.2	56.3	59.9	62.7
-60	0.00	0.35	1.58	3.70	7.51	12.8	19.1	26.3	34.2	43.0	52.1	61.2	69.8	77.6	77.4	63.0	57.5	56.9	59.2
-50	0.00	0.60	2.30	6.03	12.2	20.1	29.3	39.9	51.3	62.2	39.9	36.4	35.0	10.2	4.24	7.83	10.2	8.04	2.63
-40	0.00	0.76	3.03	8.55	16.8	26.7	38.6	51.1	33.1	32.7	6.84	21.8	48.0	69.7	88.6	94.8	95.5	95.4	93.9
-30	0.00	0.91	3.76	10.7	20.6	31.9	44.9	21.7	42.8	9.25	63.3	88.0	104	112	163	187	199	209	216
-20	0.00	1.01	4.35	12.2	22.5	34.8	43.6	22.9	7.18	74.3	100.0	113	151	173	188	199	206	213	219
-10	0.00	1.04	4.61	12.9	23.0	35.2	22.1	49.5	49.4	94.1	113	136	159	177	186	195	204	210	215
0	0.00	1.01	4.47	12.5	22.0	33.4	4.83	49.4	84.6	103	119	135	153	169	176	187	192	196	199
10	0.00	0.98	4.20	11.7	20.5	30.8	18.0	48.4	49.2	88.7	102	112	120	128	124	115	96.2	65.4	21.5
20	0.00	0.89	3.60	10.2	18.1	26.8	32.3	14.4	6.78	72.0	80.7	87.2	88.7	87.9	83.6	72.1	52.6	28.3	0.52
30	0.00	0.75	2.81	8.01	15.0	21.6	28.7	8.70	36.4	8.42	60.0	63.0	64.8	62.1	54.6	45.0	32.3	17.2	0.60
40	0.00	0.60	2.03	5.70	11.0	16.2	21.5	26.3	13.2	12.3	6.18	20.7	42.8	40.3	36.0	30.4	23.9	15.2	5.61
50	0.00	0.45	1.40	3.46	6.92	10.9	14.4	17.6	20.4	22.3	10.2	3.51	20.2	8.22	2.66	5.72	8.45	6.38	0.91
60	0.00	0.23	0.91	1.76	3.45	5.75	8.14	10.3	11.8	12.8	13.6	13.6	13.1	12.0	9.37	6.55	2.53	0.62	0.09
70	0.00	0.04	0.46	0.88	1.31	1.97	2.93	3.90	4.81	5.54	5.98	6.12	5.95	5.41	4.61	3.64	2.52	1.29	0.00
80	0.00	0.00	0.04	0.22	0.40	0.53	0.67	0.77	0.86	0.92	0.98	1.01	1.00	0.94	0.84	0.69	0.48	0.25	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.31	0.39	0.41	0.40	0.39	0.40	0.38	0.37	0.36	0.34	0.32	0.29	0.27	0.25	0.22	0.20	0.18	0.15
110	0.00	0.42	0.46	0.47	0.47	0.46	0.44	0.45	0.44	0.42	0.40	0.37	0.32	0.21	0.22	0.22	0.22	0.21	0.20
120	0.00	0.46	0.50	0.50	0.49	0.51	0.50	0.48	0.25	0.27	0.28	0.50	0.50	0.48	0.44	0.35	0.34	0.33	0.32
130	0.00	0.48	0.51	0.52	0.55	0.54	0.26	0.30	0.63	0.66	0.45	0.55	0.59	0.67	0.71	0.78	0.79	0.78	0.77
140	0.00	0.50	0.54	0.56	0.57	0.27	0.32	0.74	0.49	0.62	0.73	0.85	0.95	1.00	1.12	1.13	1.19	1.20	1.20
150	0.00	0.52	0.54	0.59	0.50	0.32	0.78	0.53	0.68	0.85	0.98	1.12	1.21	1.31	1.40	1.44	1.44	1.42	1.39
160	0.00	0.52	0.55	0.61	0.28	0.53	0.81	0.66	0.82	1.00	1.17	1.29	1.42	1.52	1.58	1.62	1.64	1.72	1.69
170	0.00	0.53	0.56	0.62	0.30	0.83	0.56	0.75	0.93	1.10	1.27	1.42	1.58	1.70	1.80	1.92	1.90	2.06	2.07
180	0.00	0.54	0.57	0.63	0.32	0.87	0.59	0.78	0.97	1.16	1.32	1.48	1.67	1.84	2.02	1.79	2.27	2.22	2.12

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.7515A P:6.000W PF:0.6587 Freq:59.98Hz Lamp Flux:324.012x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	RGBWEIGHT:
SPEC.:6W 2700K Transparent lattice glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.28	2.28	1.93	2.13	2.03	1.87	1.70	1.53	1.38	1.13	0.91	0.76	1.06	0.42	0.77	0.63	0.59	0.05	
-170	1.93	1.84	1.96	1.93	1.88	1.77	1.66	1.53	1.39	1.15	0.95	0.79	1.03	0.41	0.76	0.62	0.59	0.05	
-160	1.62	1.67	1.69	1.75	1.70	1.63	1.56	1.46	1.30	1.17	0.93	1.11	0.70	0.38	0.72	0.60	0.58	0.05	
-150	1.54	1.58	1.60	1.59	1.58	1.58	1.50	1.37	1.25	1.05	0.87	1.05	0.49	0.68	0.71	0.59	0.58	0.05	
-140	1.63	1.64	1.62	1.59	1.55	1.47	1.37	1.23	1.08	0.91	1.06	0.54	0.41	0.74	0.66	0.58	0.57	0.05	
-130	1.66	1.61	1.57	1.51	1.39	1.28	1.12	0.99	1.09	0.99	0.55	0.43	0.72	0.68	0.59	0.58	0.57	0.05	
-120	1.25	1.19	1.13	1.14	1.09	1.02	0.95	0.64	0.56	0.47	0.70	0.67	0.64	0.58	0.56	0.56	0.56	0.05	
-110	0.66	0.64	0.61	0.58	0.53	0.61	0.64	0.63	0.61	0.60	0.58	0.55	0.54	0.54	0.55	0.55	0.53	0.05	
-100	0.40	0.41	0.42	0.43	0.43	0.44	0.45	0.46	0.47	0.48	0.49	0.50	0.50	0.51	0.52	0.51	0.43	0.05	
-90	0.19	0.18	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.10	0.09	0.08	0.07	0.06	0.06	0.05	
-80	20.4	19.2	17.8	16.3	14.6	12.9	11.1	9.36	7.61	5.99	4.51	3.24	2.28	1.53	0.90	0.36	0.07	0.05	
-70	59.8	56.2	52.0	47.3	42.2	37.1	32.0	27.3	22.8	18.5	14.5	10.8	7.45	4.53	2.36	1.18	0.28	0.05	
-60	59.3	60.8	64.8	78.2	77.3	69.4	61.0	51.6	42.4	33.5	25.7	19.3	13.8	9.01	4.89	1.94	0.62	0.05	
-50	8.33	12.3	9.73	4.59	7.07	35.7	57.9	53.7	61.6	51.0	39.1	28.4	19.8	13.2	7.65	3.13	0.92	0.05	
-40	95.1	94.9	93.7	87.4	69.0	47.7	31.2	3.70	53.8	51.0	50.3	37.7	25.8	16.8	9.97	4.42	1.10	0.05	
-30	208	199	187	163	111	102	86.7	62.9	10.4	44.0	49.6	44.1	30.8	19.5	11.7	5.46	1.27	0.05	
-20	213	206	198	187	173	150	111	97.4	73.8	8.21	53.5	46.4	34.1	21.4	12.8	6.14	1.38	0.05	
-10	209	202	194	187	175	158	135	110	92.6	62.9	41.0	46.5	34.7	21.9	13.1	6.43	1.43	0.05	
0	194	189	183	177	167	149	135	116	101	84.9	32.9	47.3	32.8	20.9	12.6	6.32	1.41	0.05	
10	64.6	94.1	114	124	126	119	111	98.9	87.1	62.7	39.9	42.5	30.3	19.5	11.9	6.02	1.36	0.05	
20	28.4	52.8	71.2	82.4	87.1	88.2	84.8	78.1	71.5	7.82	44.9	35.1	26.1	17.0	10.7	5.39	1.26	0.05	
30	16.9	32.0	45.1	54.3	61.1	62.8	61.7	59.6	9.58	37.6	36.5	27.9	20.6	13.9	9.05	4.50	1.11	0.05	
40	14.9	23.3	29.3	34.9	39.6	42.5	30.2	3.04	33.5	31.1	25.4	20.6	15.2	11.0	7.12	3.41	0.93	0.05	
50	6.67	10.6	7.62	3.02	5.10	20.8	25.0	24.0	21.7	20.1	16.8	13.5	10.6	7.90	5.07	2.23	0.77	0.05	
60	3.08	5.87	8.28	10.2	11.6	12.7	13.5	13.0	12.2	11.1	9.68	8.41	6.73	4.95	2.95	1.26	0.49	0.05	
70	1.23	2.40	3.45	4.34	5.01	5.50	5.81	5.97	5.87	5.50	4.94	4.20	3.24	2.15	1.23	0.76	0.21	0.05	
80	0.35	0.69	1.00	1.26	1.47	1.61	1.67	1.65	1.53	1.36	1.15	0.94	0.79	0.67	0.46	0.20	0.04	0.05	
90	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.05	0.05	
100	0.18	0.21	0.23	0.26	0.28	0.30	0.33	0.35	0.38	0.40	0.42	0.44	0.44	0.46	0.48	0.49	0.42	0.05	
110	0.21	0.23	0.24	0.24	0.24	0.37	0.43	0.46	0.47	0.49	0.49	0.48	0.48	0.50	0.52	0.52	0.52	0.05	
120	0.34	0.36	0.38	0.50	0.54	0.56	0.57	0.33	0.33	0.30	0.58	0.58	0.58	0.53	0.53	0.55	0.55	0.05	
130	0.80	0.81	0.81	0.76	0.72	0.64	0.60	0.54	0.75	0.74	0.37	0.32	0.65	0.63	0.56	0.56	0.56	0.05	
140	1.22	1.22	1.18	1.18	1.09	1.02	0.92	0.80	0.70	0.61	0.86	0.40	0.33	0.69	0.63	0.57	0.56	0.05	
150	1.44	1.48	1.52	1.49	1.43	1.34	1.25	1.08	0.96	0.78	0.66	0.92	0.41	0.63	0.69	0.58	0.57	0.05	
160	1.74	1.70	1.70	1.70	1.65	1.58	1.44	1.31	1.13	0.98	0.77	1.01	0.64	0.35	0.70	0.60	0.58	0.05	
170	2.08	1.98	2.02	1.95	1.87	1.75	1.63	1.47	1.31	1.06	0.87	0.72	1.00	0.39	0.75	0.62	0.59	0.05	
180	2.28	2.28	1.93	2.13	2.03	1.87	1.70	1.53	1.38	1.13	0.91	0.76	1.06	0.42	0.77	0.63	0.59	0.05	

H(β) Range:-90 - 90DEGH(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2023-09-22

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: