

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		612.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I <sub>max</sub> At 50% of I <sub>max</sub> At 90% of I <sub>max</sub>	125.8V x 134.9H 69.6V x 74.3H 18.4V x 20.1H
Beam Flux	Total To 10% of I <sub>max</sub> To 50% of I <sub>max</sub> To 90% of I <sub>max</sub>	1000.1 lumens per klm. 962.6 lumens per klm. 487.0 lumens per klm. 47.6 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.0 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:01 August 2022

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:12.06V I:0.4519A P:3.606W PF:0.6616 Freq:49.99Hz Lamp Flux:48.899x1 lm		
NAME: Path Light	TYPE:M4B1-3.5W-30K-A+LAB-043 WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:A
MFR.: EVERFINE	SUR.:	Shielding Angle:

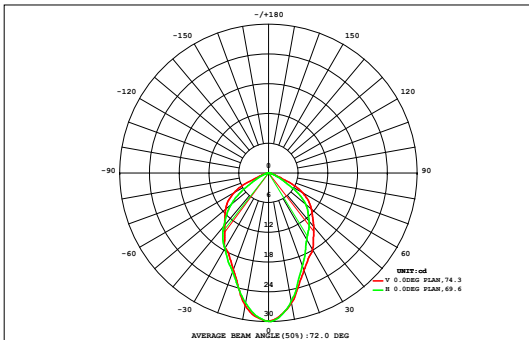

DATA OF LAMP		Eff:13.56lm/W	
MODEL	LAB-043	Imax (cd)	29.96
NOMINAL POWER (W)	3.5	AVAILABILITY (%)	96.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	47.24
NOMINAL FLUX (lm)	48.899	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	48.90
TEST VOLTAGE (V)	12	$\theta$ @50% (H,V)	74,70DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		$\Phi t$	$\Phi a$
	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.13	0.00
70	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.08	0.08	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.61	0.24
60	0.00	0.00	0.01	0.03	0.07	0.13	0.18	0.21	0.22	0.22	0.21	0.17	0.13	0.07	0.03	0.01	0.00	0.00	1.69	1.57
50	0.00	0.00	0.02	0.07	0.14	0.22	0.28	0.32	0.34	0.34	0.32	0.28	0.22	0.14	0.06	0.02	0.00	0.00	2.78	2.72
40	0.00	0.00	0.03	0.11	0.20	0.28	0.35	0.40	0.43	0.43	0.41	0.35	0.28	0.20	0.11	0.03	0.00	0.00	3.60	3.55
30	0.00	0.01	0.04	0.14	0.23	0.32	0.41	0.49	0.53	0.53	0.49	0.42	0.33	0.23	0.14	0.04	0.01	0.00	4.36	4.32
20	0.00	0.01	0.06	0.16	0.25	0.36	0.47	0.58	0.68	0.68	0.59	0.48	0.36	0.26	0.16	0.06	0.01	0.00	5.16	5.13
10	0.00	0.01	0.07	0.17	0.27	0.38	0.51	0.68	0.84	0.84	0.67	0.52	0.39	0.27	0.17	0.06	0.01	0.00	5.85	5.82
0	0.00	0.01	0.07	0.17	0.27	0.39	0.52	0.68	0.84	0.84	0.68	0.53	0.39	0.27	0.17	0.06	0.01	0.00	5.89	5.86
-10	0.00	0.01	0.06	0.16	0.26	0.37	0.49	0.60	0.71	0.70	0.61	0.50	0.37	0.26	0.16	0.05	0.01	0.00	5.31	5.27
-20	0.00	0.01	0.04	0.14	0.23	0.33	0.44	0.53	0.58	0.58	0.53	0.44	0.33	0.23	0.14	0.04	0.01	0.00	4.60	4.56
-30	0.00	0.00	0.03	0.11	0.20	0.28	0.36	0.44	0.48	0.48	0.44	0.37	0.28	0.19	0.10	0.03	0.00	0.00	3.80	3.76
-40	0.00	0.00	0.02	0.06	0.14	0.21	0.28	0.33	0.36	0.36	0.33	0.28	0.21	0.14	0.06	0.02	0.00	0.00	2.82	2.76
-50	0.00	0.00	0.01	0.03	0.07	0.12	0.17	0.20	0.21	0.21	0.20	0.17	0.12	0.07	0.03	0.01	0.00	0.00	1.61	1.49
-60	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.07	0.07	0.07	0.07	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.56	0.18
-70	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.11	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
$\Phi t$	0.00	0.06	0.45	1.37	2.39	3.49	4.61	5.65	6.42	6.41	5.66	4.65	3.52	2.39	1.34	0.43	0.06	0.00	49	---
$\Phi a$	0.00	0.00	0.30	1.26	2.29	3.40	4.51	5.54	6.31	6.30	5.56	4.55	3.43	2.29	1.23	0.27	0.00	0.00	---	47


one-half-peak spread: U:38.9,D:31.6 , L:37.0,R:38.2,NEMA Beam Type: Type 7 x 6 (H x V)

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:01 August 2022

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

**ISOCANDELA DIAGRAM**

Test:U:12.06V I:0.4519A P:3.606W PF:0.6616 Freq:49.99Hz Lamp Flux:48.899x1 lm		
NAME: Path Light	TYPE:M4B1-3.5W-30K-A+LAB-043	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:A
MFR.: EVERFINE	SUR.:	Shielding Angle:

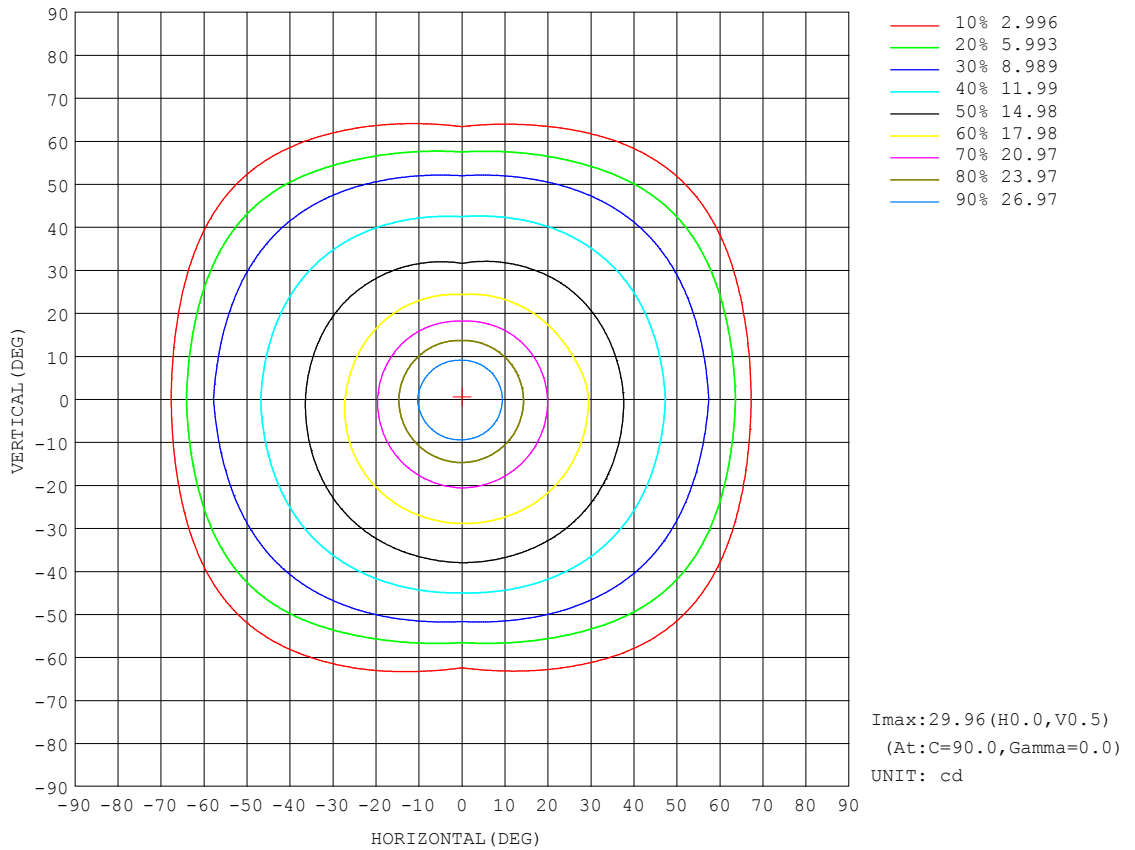


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:01 August 2022

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**


Test:U:12.06V I:0.4519A P:3.606W PF:0.6616 Freq:49.99Hz Lamp Flux:48.899x1 lm		
NAME: Path Light	TYPE:M4B1-3.5W-30K-A+LAB-043	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:A
MFR.: EVERFINE	SUR.:	Shielding Angle:

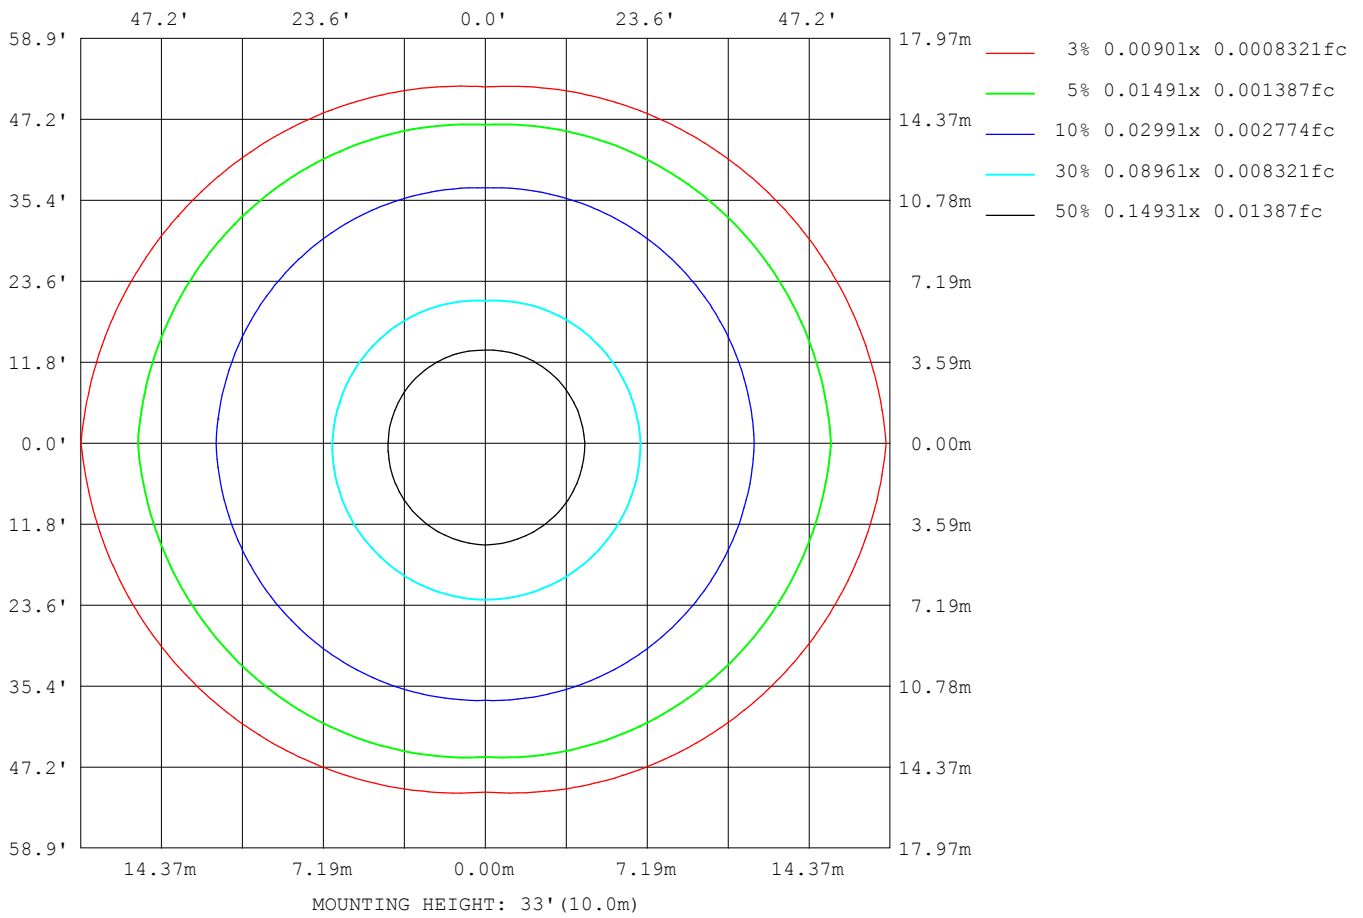

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:01 August 2022

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

**Planar Illuminance Curve**

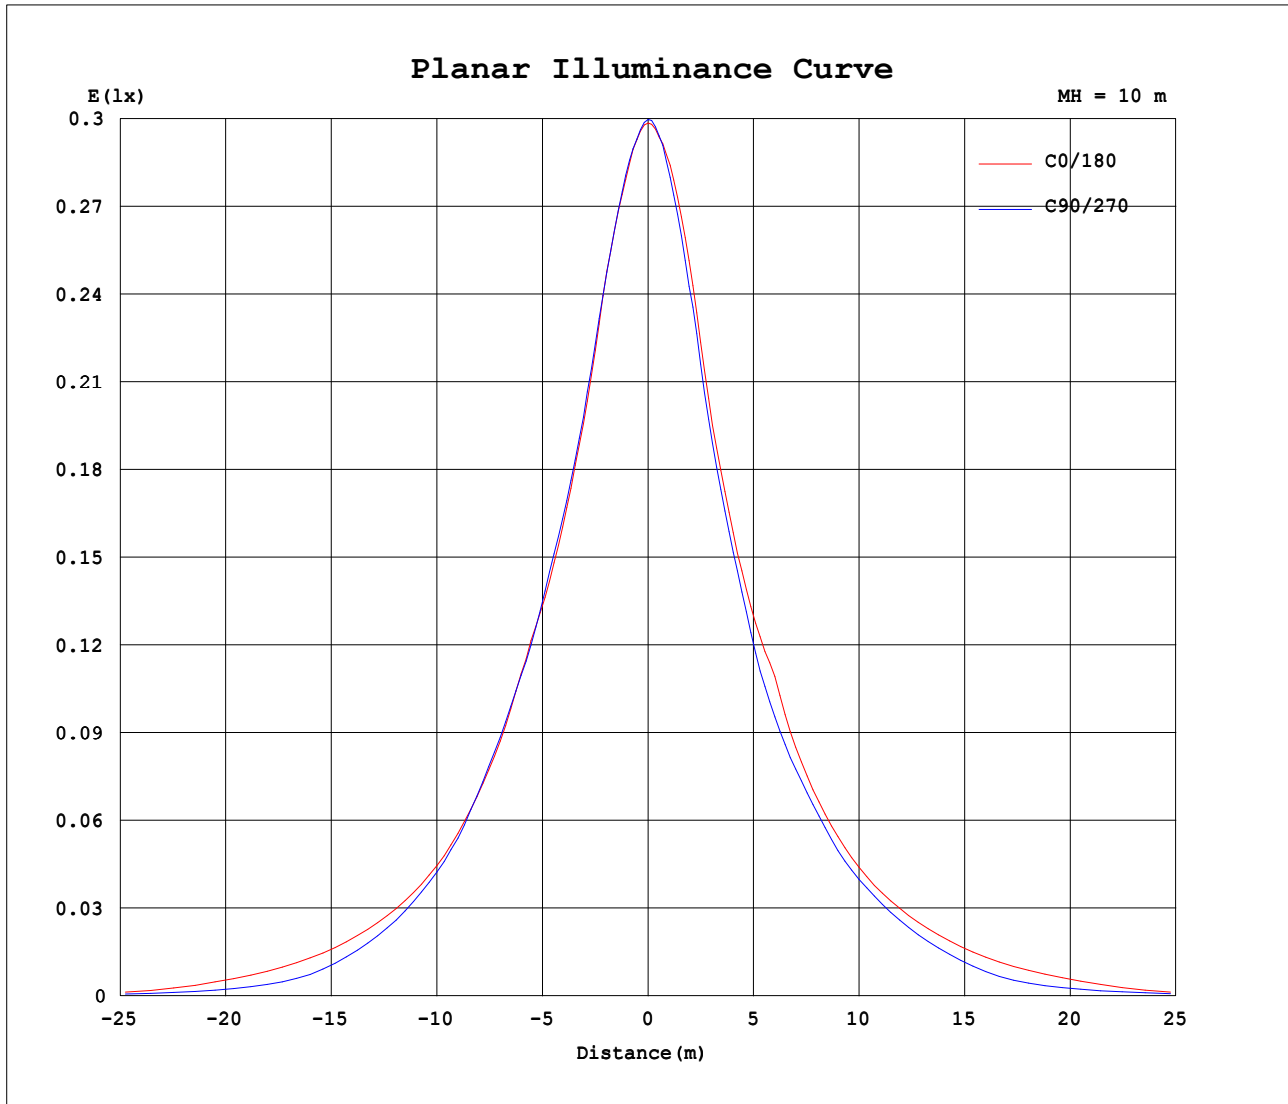


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:01 August 2022

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

**AAI Figure**

Test:U:12.06V I:0.4519A P:3.606W PF:0.6616 Freq:49.99Hz Lamp Flux:48.899x1 lm		
NAME: Path Light	TYPE:M4B1-3.5W-30K-A+LAB-043	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:A
MFR.: EVERFINE	SUR.:	Shielding Angle:

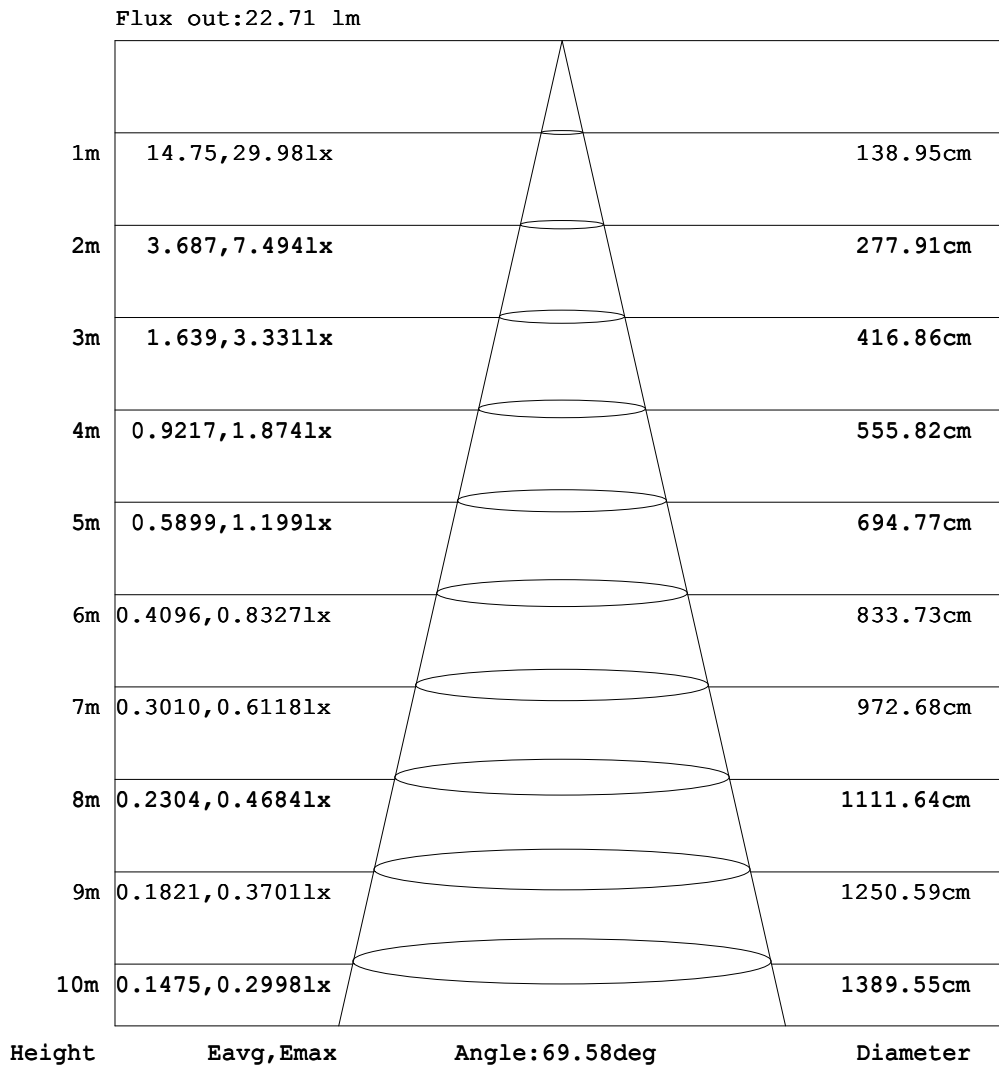

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:01 August 2022

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.06V I:0.4519A P:3.606W PF:0.6616 Freq:49.99Hz Lamp Flux:48.899x1 lm		
NAME: Path Light	TYPE:M4B1-3.5W-30K-A+LAB-043	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:A
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) \ V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.03
-70	0.00	0.00	0.00	0.00	0.00	0.09	0.18	0.29	0.41	0.52	0.65	0.76	0.84	0.93	1.01	1.06	1.08	1.07	1.03
-60	0.00	0.00	0.00	0.04	0.21	0.41	0.66	0.93	1.27	1.70	2.30	3.04	3.63	3.99	4.20	4.27	4.26	4.16	3.94
-50	0.00	0.00	0.00	0.19	0.49	0.87	1.37	2.15	3.72	5.08	5.95	6.72	7.65	8.44	9.03	9.44	9.72	9.83	9.80
-40	0.00	0.00	0.06	0.36	0.82	1.46	2.75	5.12	6.60	7.88	9.21	10.2	11.1	11.8	12.5	13.1	13.6	14.0	14.2
-30	0.00	0.00	0.13	0.56	1.15	2.29	5.17	7.14	8.76	10.2	11.3	12.3	13.4	14.6	15.7	16.6	17.2	17.5	17.6
-20	0.00	0.00	0.19	0.72	1.51	3.61	6.73	8.58	10.2	11.5	12.6	14.0	15.5	17.1	18.1	19.2	20.2	20.9	21.3
-10	0.00	0.00	0.25	0.82	1.80	4.75	7.65	9.56	11.0	12.2	13.5	15.1	17.1	18.2	19.9	21.9	24.4	26.2	26.7
0	0.00	0.00	0.27	0.86	1.93	5.27	8.14	10.0	11.3	12.5	13.9	15.5	17.6	18.7	20.8	23.8	27.1	29.1	29.9
10	0.00	0.00	0.25	0.82	1.81	4.76	7.68	9.59	11.0	12.1	13.4	14.9	16.7	17.8	19.5	21.5	24.0	25.8	26.3
20	0.00	0.00	0.19	0.73	1.52	3.64	6.77	8.68	10.3	11.4	12.4	13.6	14.8	16.2	17.0	18.2	19.2	19.8	20.0
30	0.00	0.00	0.13	0.56	1.17	2.32	5.23	7.23	8.90	10.2	11.2	12.0	12.9	13.8	14.5	15.1	15.5	15.6	15.5
40	0.00	0.00	0.06	0.37	0.83	1.50	2.80	5.21	6.72	8.11	9.37	10.2	10.9	11.5	11.9	12.3	12.6	12.8	12.8
50	0.00	0.00	0.00	0.20	0.51	0.89	1.42	2.23	3.82	5.21	6.12	7.04	7.98	8.71	9.18	9.51	9.74	9.82	9.77
60	0.00	0.00	0.00	0.04	0.22	0.43	0.70	0.98	1.35	1.80	2.42	3.19	3.83	4.21	4.44	4.57	4.59	4.51	4.32
70	0.00	0.00	0.00	0.00	0.00	0.10	0.20	0.31	0.44	0.58	0.70	0.83	0.95	1.06	1.16	1.23	1.27	1.27	1.25
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.07	0.08	0.09	0.11	0.12	0.12	0.12	0.12
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:01 August 2022

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.06V I:0.4519A P:3.606W PF:0.6616 Freq:49.99Hz Lamp Flux:48.899x1 lm		
NAME: Path Light	TYPE:M4B1-3.5W-30K-A+LAB-043	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:A
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) \ V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.04	0.04	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	1.07	1.08	1.06	1.01	0.94	0.85	0.77	0.65	0.52	0.43	0.31	0.15	0.02	0.00	0.00	0.00	0.00	0.00
-60	4.14	4.23	4.23	4.14	3.91	3.50	2.94	2.18	1.68	1.28	0.95	0.67	0.43	0.17	0.00	0.00	0.00	0.00
-50	9.83	9.72	9.43	9.01	8.39	7.59	6.65	5.82	4.92	3.55	2.09	1.38	0.88	0.53	0.15	0.00	0.00	0.00
-40	14.0	13.6	13.2	12.6	11.9	11.1	10.2	9.13	7.79	6.44	4.89	2.57	1.47	0.83	0.40	0.00	0.00	0.00
-30	17.6	17.3	16.7	15.8	14.8	13.6	12.4	11.3	10.1	8.64	6.96	4.89	2.22	1.18	0.60	0.05	0.00	0.00
-20	21.0	20.3	19.4	18.3	17.2	15.7	14.3	12.8	11.5	10.1	8.46	6.51	3.37	1.52	0.72	0.13	0.00	0.00
-10	26.1	24.2	22.0	20.1	18.6	17.3	15.5	13.8	12.3	11.0	9.41	7.43	4.45	1.78	0.82	0.20	0.00	0.00
0	28.8	26.7	23.6	20.9	19.1	17.8	15.9	14.2	12.6	11.3	9.86	7.91	4.87	1.90	0.86	0.23	0.00	0.00
10	25.7	23.8	21.6	19.7	18.2	16.9	15.2	13.7	12.2	11.0	9.45	7.46	4.46	1.79	0.82	0.21	0.00	0.00
20	19.9	19.3	18.3	17.3	16.3	15.1	13.9	12.6	11.4	10.2	8.55	6.55	3.39	1.53	0.73	0.14	0.00	0.00
30	15.6	15.5	15.2	14.7	14.0	13.1	12.1	11.2	10.2	8.79	7.05	4.94	2.26	1.20	0.61	0.05	0.00	0.00
40	12.8	12.7	12.4	12.0	11.6	11.0	10.2	9.29	8.02	6.56	4.98	2.62	1.50	0.84	0.40	0.00	0.00	0.00
50	9.82	9.74	9.50	9.15	8.66	7.92	6.97	6.00	5.05	3.65	2.16	1.43	0.90	0.54	0.16	0.00	0.00	0.00
60	4.50	4.56	4.52	4.38	4.12	3.70	3.10	2.31	1.78	1.36	1.00	0.70	0.45	0.19	0.00	0.00	0.00	0.00
70	1.27	1.26	1.23	1.16	1.07	0.96	0.84	0.70	0.58	0.47	0.33	0.18	0.03	0.00	0.00	0.00	0.00	0.00
80	0.12	0.12	0.11	0.10	0.07	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:01 August 2022

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks: