

## Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1794.2 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	76.9V x 76.9H
	At 50% of Imax	38.1V x 38.1H
	At 90% of Imax	14.4V x 14.3H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	882.2 lumens per klm.
	To 50% of Imax	434.0 lumens per klm.
	To 90% of Imax	78.1 lumens per klm.
	Upward LOR	0.8 %
	Downward LOR	99.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2023-05-26

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.13V I:0.3102A P:2.312W PF:0.6145 Freq:59.99Hz Lamp Flux:121.207x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano CW 2.5W 2700K	WEIGHT:
SPEC.:30°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

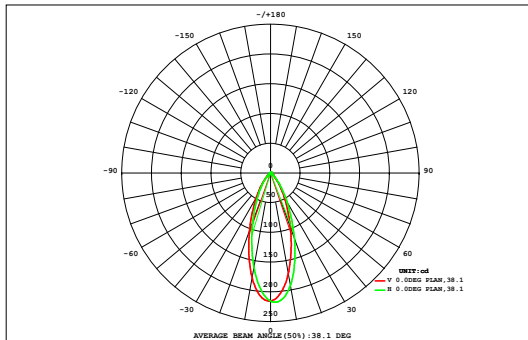

DATA OF LAMP		Eff:52.43lm/W	
MODEL	N7B1-2.5W-30-A	Imax (cd)	217.5
NOMINAL POWER (W)	2.5	AVAILABILITY (%)	88.1
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	106.8
NOMINAL FLUX (lm)	121.207	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	121.2
TEST VOLTAGE (V)	12	θ @50% (H,V)	38,38DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.00
64	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.63	0.00
56	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.10	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	1.69	0.00
48	0.00	0.00	0.01	0.02	0.05	0.10	0.16	0.23	0.27	0.27	0.23	0.16	0.10	0.05	0.02	0.01	0.00	0.00	3.76	2.37
40	0.00	0.00	0.02	0.04	0.11	0.22	0.36	0.52	0.62	0.62	0.51	0.36	0.21	0.11	0.04	0.02	0.00	0.00	7.20	6.33
32	0.00	0.01	0.02	0.08	0.19	0.40	0.69	1.00	1.23	1.23	0.99	0.67	0.39	0.19	0.08	0.03	0.01	0.00	12.2	11.4
24	0.00	0.01	0.04	0.11	0.30	0.63	1.13	1.73	2.19	2.18	1.69	1.09	0.61	0.29	0.11	0.04	0.01	0.00	17.6	16.9
	0.00	0.01	0.05	0.15	0.39	0.85	1.59	2.54	3.29	3.26	2.48	1.54	0.82	0.38	0.14	0.04	0.01	0.00	20.9	20.3
	0.00	0.01	0.05	0.17	0.45	0.99	1.89	3.07	3.97	3.92	2.96	1.80	0.93	0.43	0.16	0.05	0.01	0.00	20.0	19.4
	0.00	0.01	0.05	0.17	0.44	0.96	1.82	2.94	3.77	3.72	2.83	1.73	0.91	0.42	0.16	0.05	0.01	0.00	15.4	14.8
	0.00	0.01	0.04	0.14	0.37	0.79	1.44	2.24	2.79	2.76	2.17	1.39	0.76	0.36	0.14	0.04	0.01	0.00	10.0	9.29
-24	0.00	0.01	0.03	0.10	0.27	0.56	0.97	1.42	1.70	1.69	1.39	0.94	0.54	0.26	0.10	0.03	0.01	0.00	5.77	4.80
-32	0.00	0.01	0.02	0.07	0.17	0.34	0.57	0.80	0.93	0.92	0.78	0.56	0.34	0.16	0.07	0.02	0.01	0.00	2.95	1.16
-40	0.00	0.00	0.01	0.04	0.09	0.18	0.29	0.40	0.46	0.46	0.40	0.29	0.17	0.09	0.04	0.01	0.00	0.00	1.25	0.00
-48	0.00	0.00	0.01	0.02	0.04	0.08	0.12	0.17	0.19	0.19	0.16	0.12	0.08	0.04	0.02	0.01	0.00	0.00	0.46	0.00
-56	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.07	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.15	0.00
-64	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.02	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	107
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.01	0.09	0.36	1.13	2.93	6.19	11.2	17.2	21.6	21.4	16.8	10.8	5.95	2.84	1.11	0.36	0.10	0.01	120	---
Φ a	0.00	0.00	0.00	0.00	1.47	5.18	10.3	16.4	20.8	20.6	15.9	9.88	4.93	1.33	0.00	0.00	0.00	0.00	---	107

one-half-peak spread: U:19.1,D:19.4 , L:18.6,R:19.8


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2023-05-26

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:12.13V I:0.3102A P:2.312W PF:0.6145 Freq:59.99Hz Lamp Flux:121.207x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano CW 2.5W 2700K	WEIGHT:
SPEC.:30°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

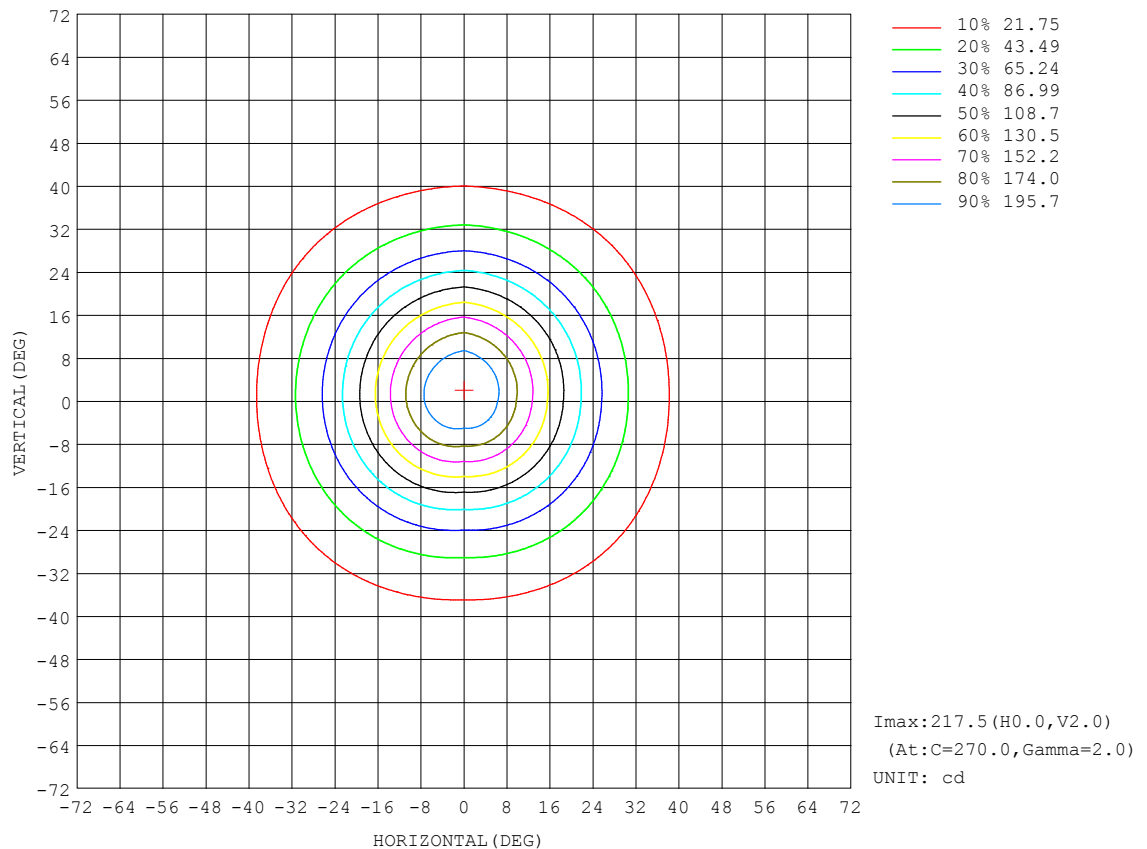


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2023-05-26

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM


Test:U:12.13V I:0.3102A P:2.312W PF:0.6145 Freq:59.99Hz Lamp Flux:121.207x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano CW 2.5W 2700K	WEIGHT:
SPEC.:30°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

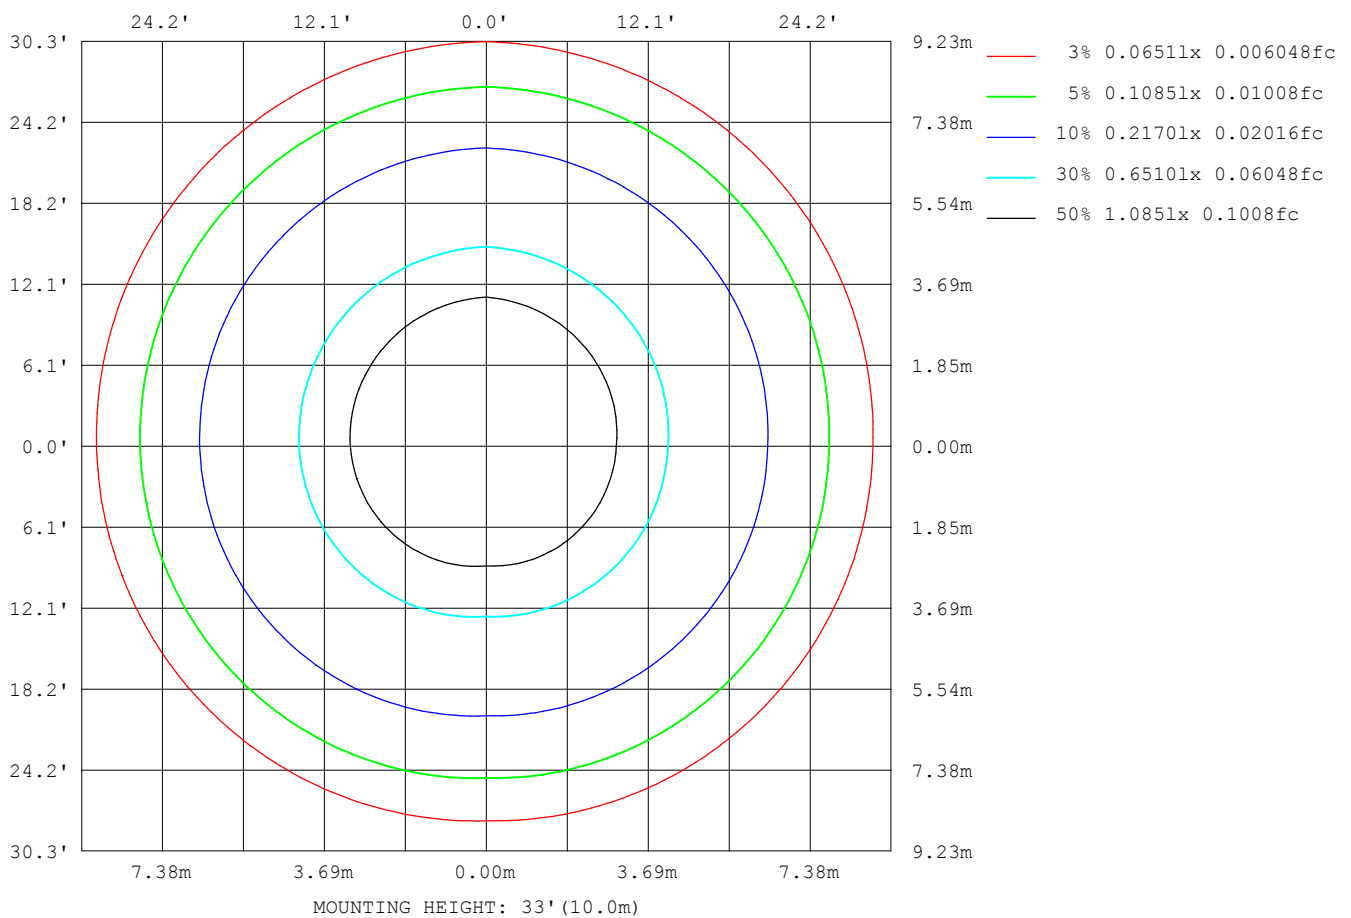

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2023-05-26

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

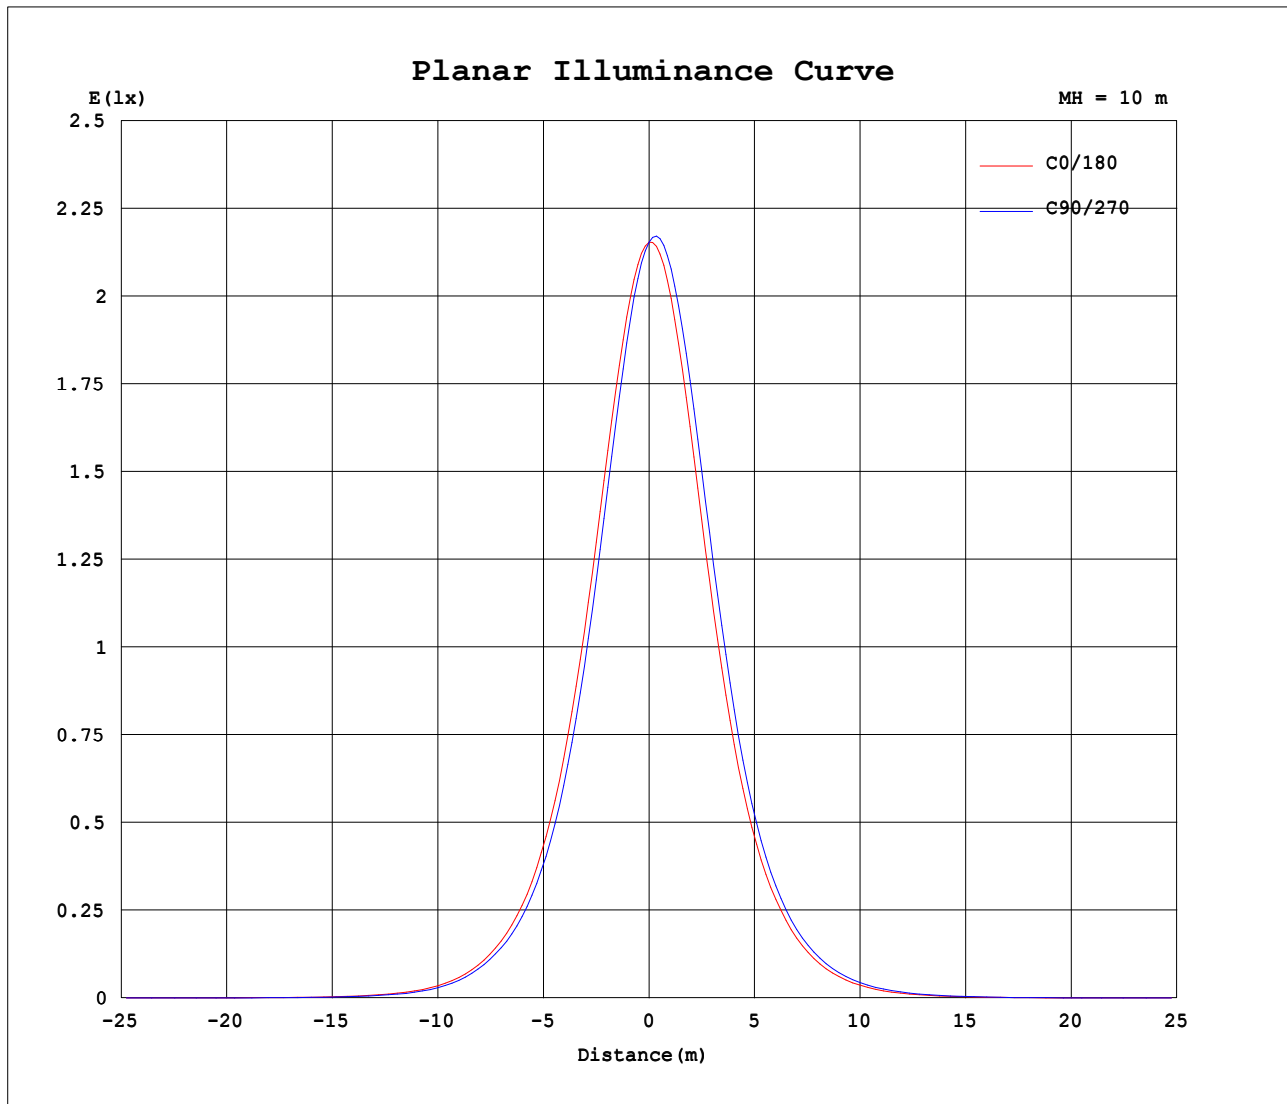


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2023-05-26

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

### AAI Figure

Test:U:12.13V I:0.3102A P:2.312W PF:0.6145 Freq:59.99Hz Lamp Flux:121.207x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano CW 2.5W 2700K	WEIGHT:
SPEC.:30°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

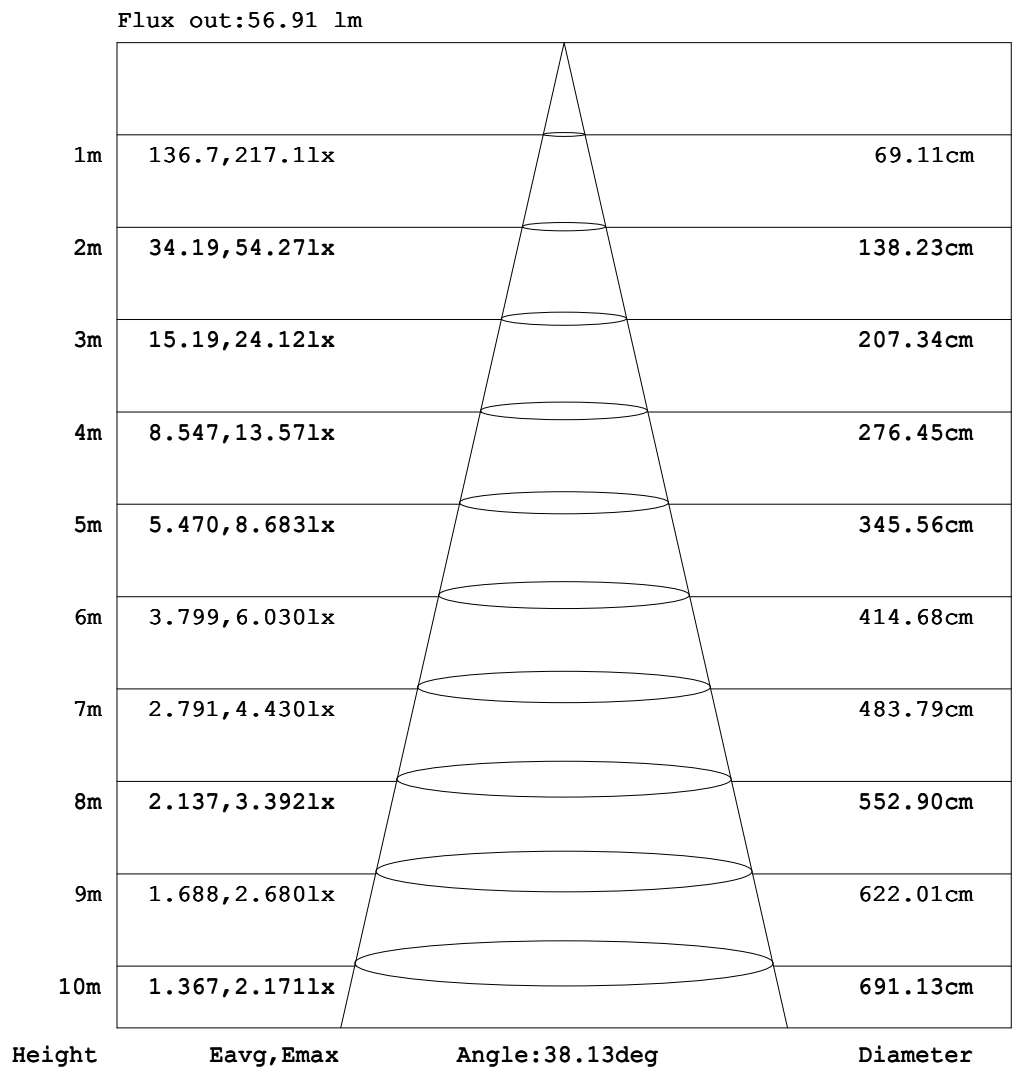

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2023-05-26

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.13V I:0.3102A P:2.312W PF:0.6145 Freq:59.99Hz Lamp Flux:121.207x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano CW 2.5W 2700K	WEIGHT:
SPEC.:30°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.23	0.42	0.61	0.82	0.98	1.13	1.22	1.24
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.10	0.25	0.42	0.62	0.81	0.99	1.11	1.19	1.24
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.18	0.33	0.49	0.67	0.81	0.94	1.04	1.10
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.17	0.29	0.42	0.54	0.64	0.73	0.78
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.09	0.15	0.22	0.28	0.33	0.36
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.06
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.20	0.34	0.53	0.68	0.79	0.91	1.00	1.05	1.06
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.37	0.71	1.04	1.47	1.97	2.50	3.06	3.55	3.95	4.18	4.20
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.59	1.06	1.75	2.72	4.07	5.85	8.01	10.4	12.6	14.4	15.5	15.7
-30	0.00	0.00	0.00	0.00	0.00	0.13	0.54	1.11	2.07	3.61	6.10	9.82	14.7	20.6	26.8	32.4	37.0	39.9	40.3
-20	0.00	0.00	0.00	0.00	0.00	0.28	0.82	1.75	3.41	6.35	11.3	18.5	28.0	39.4	52.6	66.4	78.8	86.7	87.8
-10	0.00	0.00	0.00	0.00	0.00	0.40	1.08	2.33	4.68	9.09	16.3	27.0	41.5	60.5	84.8	113	139	158	161
0	0.00	0.00	0.00	0.00	0.00	0.46	1.17	2.58	5.26	10.3	18.6	31.1	48.5	72.5	104	142	179	207	215
10	0.00	0.00	0.00	0.00	0.00	0.41	1.10	2.39	4.88	9.50	17.0	28.2	44.0	64.9	92.4	124	156	181	192
20	0.00	0.00	0.00	0.00	0.00	0.29	0.85	1.84	3.68	6.96	12.4	20.3	31.0	44.8	61.0	79.4	97.4	111	118
30	0.00	0.00	0.00	0.00	0.00	0.15	0.57	1.18	2.27	4.12	7.09	11.4	17.2	24.2	32.1	40.2	47.5	52.9	55.3
40	0.00	0.00	0.00	0.00	0.00	0.01	0.22	0.63	1.15	1.97	3.23	5.03	7.39	10.2	13.3	16.4	19.1	20.9	21.8
50	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.17	0.42	0.78	1.19	1.73	2.44	3.26	4.16	5.03	5.79	6.35	6.60
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.12	0.26	0.42	0.61	0.79	0.96	1.12	1.27	1.37	1.42
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.09	0.10	0.12
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.17	0.22	0.29	0.30	0.30
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.19	0.32	0.47	0.56	0.64	0.74	0.75
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.19	0.34	0.52	0.69	0.85	0.95	1.06	1.07
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.23	0.42	0.61	0.82	0.98	1.13	1.22	1.23

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 0.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ADMIN  
 Test Date:2023-05-26

V(B) Range:-180 - 180DEG  
 V(B) Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
 Humidity:65.0%  
 Test Distance:13.563m [K=1.0000]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.13V I:0.3102A P:2.312W PF:0.6145 Freq:59.99Hz Lamp Flux:121.207x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano CW 2.5W 2700K	WEIGHT:
SPEC.:30°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.21	1.19	1.10	1.04	0.87	0.64	0.44	0.29	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	1.22	1.16	1.09	0.95	0.80	0.62	0.44	0.26	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	1.07	1.00	0.92	0.82	0.64	0.47	0.31	0.18	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.75	0.69	0.62	0.50	0.37	0.27	0.16	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.35	0.31	0.26	0.20	0.14	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	1.06	1.01	0.93	0.82	0.71	0.56	0.40	0.25	0.12	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	4.17	3.94	3.54	3.06	2.51	1.99	1.51	1.09	0.76	0.45	0.20	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-40	15.4	14.3	12.4	10.2	7.89	5.77	4.04	2.74	1.80	1.12	0.65	0.28	0.03	0.00	0.00	0.00	0.00	0.00	
-30	39.5	36.4	31.8	26.3	20.2	14.4	9.60	6.00	3.60	2.11	1.19	0.61	0.21	0.00	0.00	0.00	0.00	0.00	
-20	85.8	77.3	64.7	50.9	37.9	27.1	18.0	10.9	6.22	3.40	1.82	0.92	0.38	0.03	0.00	0.00	0.00	0.00	
-10	156	136	108	81.2	57.8	39.4	26.0	15.8	8.80	4.61	2.36	1.17	0.51	0.09	0.00	0.00	0.00	0.00	
0	202	172	135	98.3	68.5	45.6	29.7	18.0	9.99	5.18	2.61	1.27	0.55	0.12	0.00	0.00	0.00	0.00	
10	179	153	120	88.8	62.2	41.9	27.3	16.5	9.21	4.81	2.43	1.19	0.51	0.09	0.00	0.00	0.00	0.00	
20	110	95.9	77.7	59.4	43.2	30.2	19.8	12.0	6.83	3.67	1.91	0.95	0.39	0.03	0.00	0.00	0.00	0.00	
30	52.5	47.0	39.6	31.6	23.8	16.9	11.2	6.99	4.11	2.31	1.26	0.63	0.22	0.00	0.00	0.00	0.00	0.00	
40	20.9	18.9	16.3	13.2	10.1	7.32	5.00	3.25	2.02	1.22	0.69	0.31	0.04	0.00	0.00	0.00	0.00	0.00	
50	6.34	5.78	5.03	4.15	3.27	2.46	1.77	1.24	0.83	0.50	0.24	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
60	1.38	1.28	1.14	0.99	0.82	0.64	0.48	0.31	0.17	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.11	0.10	0.07	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.02	0.04	0.05	0.05	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.33	0.35	0.30	0.25	0.17	0.12	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.77	0.70	0.67	0.62	0.47	0.33	0.20	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	1.09	1.01	0.96	0.83	0.70	0.54	0.38	0.21	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	1.21	1.19	1.10	1.04	0.87	0.64	0.44	0.29	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2023-05-26

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks: