

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1661.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	70.0V x 69.7H
	At 50% of Imax	44.3V x 47.2H
	At 90% of Imax	26.6V x 26.5H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	920.9 lumens per klm.
	To 50% of Imax	649.1 lumens per klm.
	To 90% of Imax	276.3 lumens per klm.
	Upward LOR	1.4 %
	Downward LOR	98.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.19V I:2.386A P:22.31W PF:0.7671 Freq:59.98Hz Lamp Flux:1264.23x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

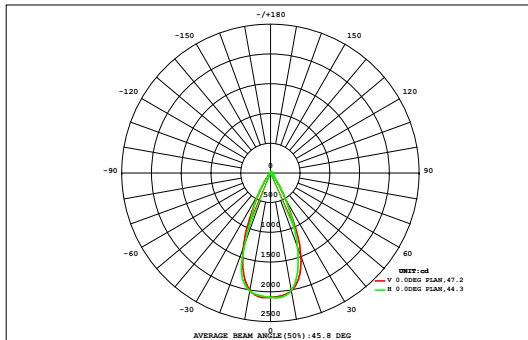

DATA OF LAMP		Eff:56.68lm/W	
MODEL	D9B1-23W-A	Imax (cd)	2101
NOMINAL POWER (W)	23	AVAILABILITY (%)	91.9
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	1162
NOMINAL FLUX (lm)	1264.23	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	1264
TEST VOLTAGE (V)	12	θ @50% (H,V)	47,44DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.12	0.12	0.10	0.09	0.06	0.05	0.03	0.02	0.01	0.01	1.00	0.00
72	0.01	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.12	0.12	0.10	0.09	0.06	0.05	0.03	0.02	0.01	0.01	1.00	0.00
64	0.01	0.02	0.03	0.05	0.09	0.13	0.19	0.24	0.29	0.29	0.24	0.18	0.13	0.08	0.05	0.03	0.02	0.01	2.09	0.00
56	0.01	0.02	0.05	0.09	0.16	0.26	0.41	0.56	0.69	0.69	0.56	0.40	0.26	0.15	0.08	0.04	0.02	0.01	4.47	0.00
48	0.01	0.03	0.06	0.13	0.28	0.52	0.85	1.23	1.54	1.55	1.25	0.86	0.51	0.27	0.13	0.06	0.03	0.01	9.32	0.00
40	0.01	0.04	0.08	0.20	0.47	0.99	1.93	3.19	4.22	4.29	3.36	2.08	1.06	0.48	0.19	0.08	0.03	0.01	22.7	7.70
32	0.02	0.04	0.11	0.30	0.79	2.13	4.89	8.78	11.8	12.0	9.25	5.43	2.44	0.87	0.29	0.10	0.04	0.01	59.4	51.3
24	0.02	0.04	0.12	0.40	1.34	4.32	10.9	19.4	24.9	25.2	20.4	11.9	5.09	1.60	0.42	0.11	0.04	0.02	126	120
	0.02	0.04	0.13	0.48	2.03	7.21	18.6	30.2	36.2	36.4	31.2	20.3	8.42	2.58	0.56	0.12	0.04	0.02	194	190
	0.02	0.04	0.13	0.52	2.48	9.38	23.6	35.5	40.3	40.2	36.3	25.8	11.0	3.27	0.64	0.12	0.03	0.01	229	225
	0.02	0.04	0.11	0.47	2.37	9.23	23.4	35.7	40.1	40.0	36.5	25.7	10.9	3.16	0.59	0.10	0.03	0.01	229	224
	0.02	0.03	0.09	0.35	1.68	6.87	17.7	30.5	37.0	37.2	31.6	19.4	8.09	2.23	0.42	0.08	0.03	0.01	193	189
-24	0.01	0.03	0.07	0.22	0.83	3.71	9.99	17.7	23.6	23.9	18.6	11.0	4.48	1.09	0.24	0.05	0.02	0.01	116	111
-32	0.01	0.03	0.05	0.12	0.33	1.13	3.85	7.64	10.1	10.3	8.12	4.39	1.45	0.41	0.12	0.04	0.02	0.01	48.1	41.6
-40	0.01	0.02	0.03	0.06	0.14	0.27	0.58	1.34	2.10	2.18	1.51	0.73	0.34	0.14	0.05	0.03	0.02	0.01	9.55	2.23
-48	0.01	0.02	0.03	0.03	0.06	0.09	0.12	0.12	0.07	0.08	0.14	0.13	0.09	0.05	0.03	0.02	0.01	0.01	1.09	0.00
-56	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.03	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.00	0.38	0.00
-64	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.00	0.20	0.00
-72	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.11	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.21	0.48	1.15	3.52	13.1	46.4	117	192	233	234	199	128	54.4	16.5	3.90	1.03	0.41	0.18	1246	---
Φ a	0.00	0.00	0.00	0.00	2.20	38.3	111	186	227	229	193	122	46.8	5.67	0.00	0.00	0.00	0.00	---	1162


one-half-peak spread: U:25.4,D:19.1 , L:20.1,R:20.1 NEMA Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.19V I:2.386A P:22.31W PF:0.7671 Freq:59.98Hz Lamp Flux:1264.23x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

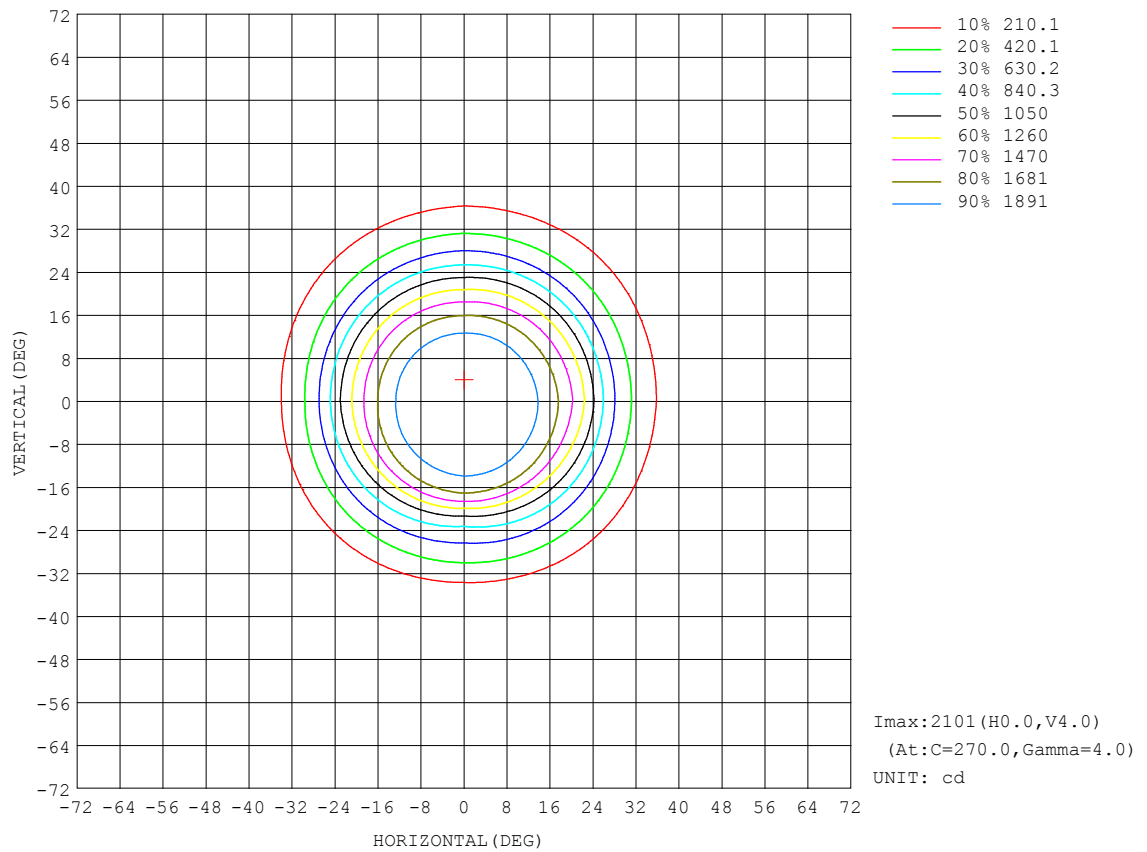


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.19V I:2.386A P:22.31W PF:0.7671 Freq:59.98Hz Lamp Flux:1264.23x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

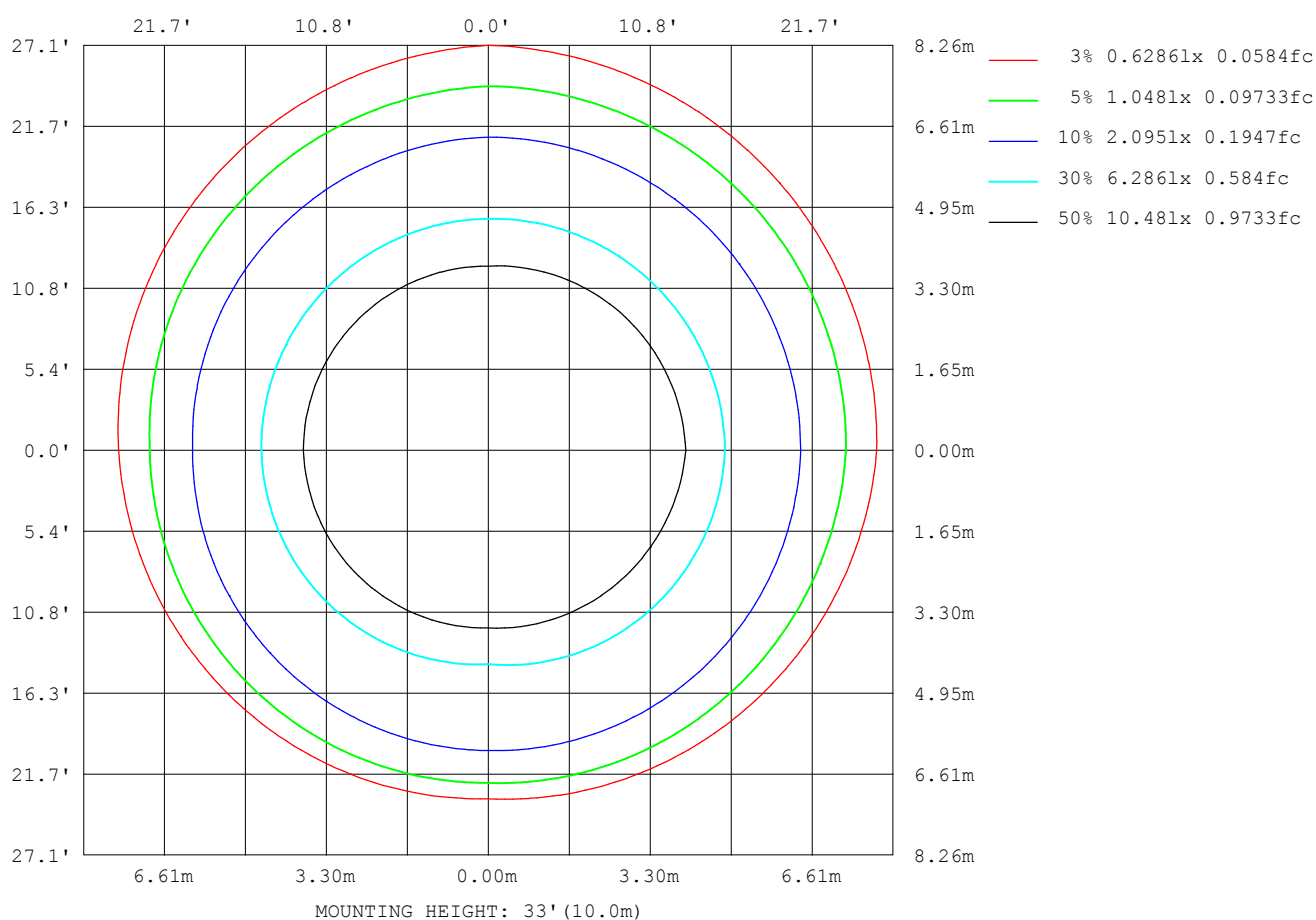

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

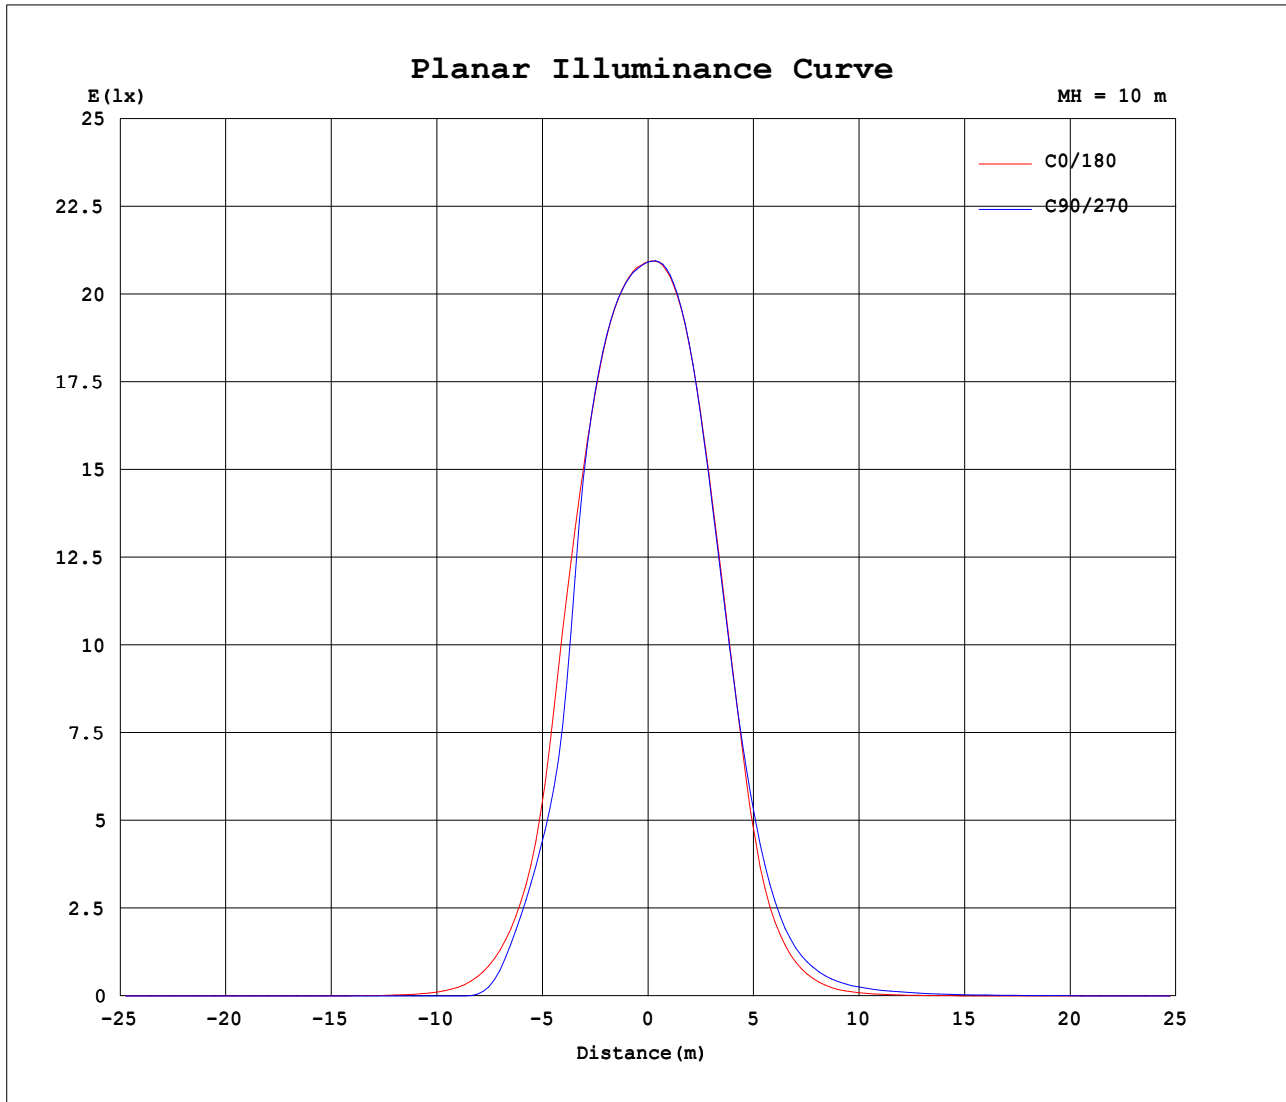


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.19V I:2.386A P:22.31W PF:0.7671 Freq:59.98Hz Lamp Flux:1264.23x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

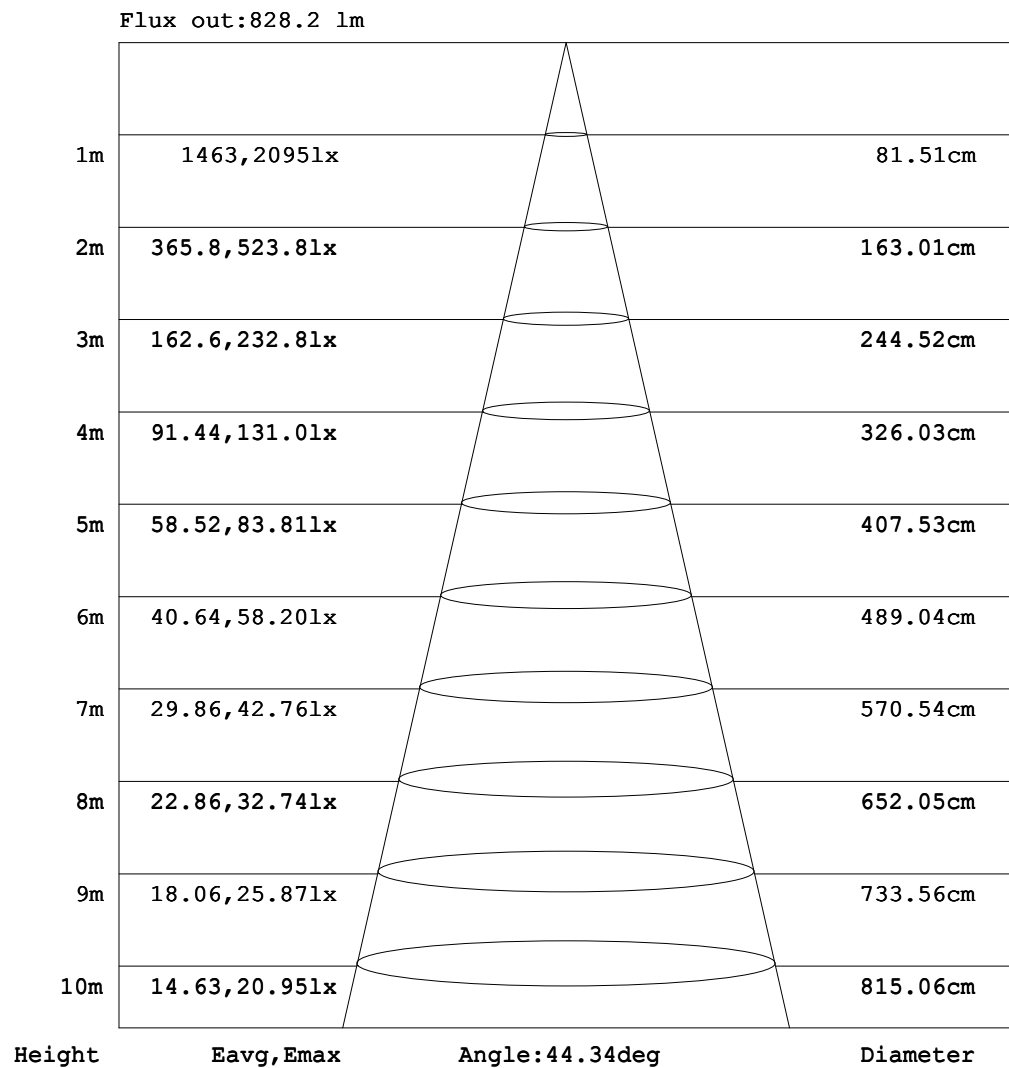

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.19V I:2.386A P:22.31W PF:0.7671 Freq:59.98Hz Lamp Flux:1264.23x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.92	2.04	3.59	5.43	7.30	9.04	10.6	11.9	13.4	14.8	15.4
-170	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.32	0.95	2.03	3.55	5.38	7.32	9.17	10.9	12.4	13.7	14.7	15.4
-160	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.25	0.76	1.62	2.86	4.43	6.16	7.91	9.55	11.0	12.3	13.3	14.0
-150	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.17	0.47	1.02	1.84	2.92	4.19	5.55	6.87	8.08	9.10	9.88	10.4
-140	0.00	0.00	0.00	0.00	0.01	0.02	0.06	0.12	0.23	0.48	0.90	1.48	2.19	2.97	3.80	4.57	5.22	5.74	6.06
-130	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.13	0.21	0.35	0.54	0.83	1.15	1.51	1.86	2.18	2.42	2.58
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.13	0.19	0.26	0.35	0.44	0.54	0.64	0.73	0.79
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.12	0.14	0.15	0.16
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.09	0.11	0.13	0.14	0.14	0.14	0.13	0.11	0.09	0.06	0.03	0.00
-70	0.00	0.00	0.00	0.09	0.17	0.27	0.38	0.43	0.50	0.55	0.56	0.57	0.54	0.49	0.42	0.33	0.23	0.12	0.00
-60	0.00	0.00	0.09	0.24	0.44	0.61	0.78	0.95	1.06	1.15	1.19	1.18	1.12	1.00	0.86	0.68	0.47	0.24	0.00
-50	0.00	0.00	0.18	0.45	0.72	1.03	1.30	1.56	1.77	1.87	1.94	1.97	2.07	2.21	2.48	2.55	2.28	1.69	0.91
-40	0.00	0.00	0.28	0.63	1.03	1.46	1.89	2.23	2.52	2.89	3.86	5.81	7.93	9.88	11.4	12.0	11.0	8.56	3.62
-30	0.00	0.03	0.38	0.83	1.36	1.92	2.45	2.93	3.76	6.28	10.8	17.5	29.2	58.4	131	238	334	398	423
-20	0.00	0.07	0.47	1.00	1.63	2.34	2.97	3.81	6.58	12.9	24.8	54.7	144	317	536	775	995	1180	1250
-10	0.00	0.09	0.54	1.11	1.86	2.66	3.44	4.96	10.1	21.3	49.1	133	319	634	1071	1546	1847	1979	2014
0	0.00	0.10	0.57	1.17	1.99	2.88	3.78	5.78	12.4	27.2	69.3	176	393	824	1345	1755	2002	2091	2093
10	0.00	0.11	0.59	1.22	2.05	3.09	4.36	6.90	13.9	28.4	63.6	153	331	661	1122	1524	1809	1959	2005
20	0.00	0.11	0.57	1.20	1.99	3.07	4.49	6.85	12.6	23.7	44.4	91.9	186	344	580	869	1119	1277	1330
30	0.00	0.09	0.52	1.10	1.82	2.77	4.13	6.12	9.71	16.8	28.2	46.2	77.7	131	204	293	385	458	492
40	0.00	0.07	0.45	0.95	1.56	2.31	3.37	4.87	7.06	10.5	16.3	24.5	35.2	48.5	64.9	84.0	103	120	129
50	0.00	0.08	0.36	0.80	1.27	1.84	2.50	3.42	4.73	6.43	8.73	11.7	15.9	21.0	26.6	32.2	37.4	41.7	44.7
60	0.00	0.08	0.28	0.58	0.98	1.36	1.81	2.31	2.87	3.59	4.54	5.68	6.98	8.44	10.00	11.6	13.0	14.3	15.2
70	0.00	0.08	0.19	0.40	0.64	0.92	1.24	1.53	1.85	2.16	2.49	2.83	3.17	3.51	3.86	4.20	4.51	4.77	4.98
80	0.00	0.08	0.17	0.28	0.39	0.53	0.72	0.89	1.07	1.26	1.45	1.63	1.82	2.00	2.17	2.34	2.49	2.63	2.76
90	0.00	0.08	0.16	0.23	0.31	0.39	0.47	0.54	0.62	0.70	0.78	0.85	0.93	1.01	1.09	1.16	1.24	1.32	1.40
100	0.00	0.07	0.13	0.19	0.24	0.28	0.31	0.34	0.37	0.39	0.41	0.43	0.45	0.47	0.48	0.50	0.53	0.55	0.58
110	0.00	0.06	0.11	0.15	0.17	0.18	0.19	0.18	0.18	0.17	0.15	0.12	0.07	0.03	0.01	0.00	0.00	0.00	0.00
120	0.00	0.06	0.09	0.11	0.12	0.11	0.10	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.05	0.07	0.08	0.07	0.05	0.00	0.00	0.00	0.00	0.00	0.02	0.08	0.12	0.23	0.33	0.40	0.45	0.44
140	0.00	0.04	0.05	0.05	0.04	0.00	0.00	0.00	0.00	0.07	0.22	0.52	0.93	1.36	1.84	2.27	2.60	2.81	2.84
150	0.00	0.03	0.04	0.03	0.01	0.00	0.00	0.00	0.15	0.47	1.04	1.81	2.77	3.79	4.77	5.61	6.22	6.59	6.66
160	0.00	0.02	0.02	0.02	0.00	0.00	0.00	0.08	0.45	1.12	2.15	3.48	4.97	6.43	7.76	8.81	9.54	9.94	10.00
170	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.22	0.76	1.73	3.14	4.84	6.63	8.31	9.76	10.9	11.9	12.6	12.7
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.92	2.04	3.59	5.43	7.30	9.04	10.6	11.9	13.4	14.8	15.5

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.19V I:2.386A P:22.31W PF:0.7671 Freq:59.98Hz Lamp Flux:1264.23x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Spotlight	WEIGHT:
SPEC.:23W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	15.6	15.0	14.2	13.2	11.7	9.73	7.62	5.48	3.56	2.11	1.02	0.40	0.12	0.00	0.00	0.00	0.00	0.00	
-170	15.2	14.8	13.9	12.8	11.2	9.23	7.18	5.15	3.35	1.95	0.96	0.36	0.10	0.01	0.00	0.00	0.00	0.00	
-160	13.7	13.1	12.1	10.9	9.31	7.59	5.79	4.10	2.63	1.48	0.74	0.27	0.04	0.01	0.00	0.00	0.00	0.00	
-150	10.1	9.61	8.80	7.74	6.52	5.18	3.86	2.68	1.68	0.96	0.46	0.19	0.03	0.01	0.00	0.00	0.00	0.00	
-140	5.90	5.54	5.01	4.34	3.56	2.78	2.03	1.36	0.86	0.46	0.22	0.06	0.02	0.01	0.00	0.00	0.00	0.00	
-130	2.51	2.34	2.07	1.76	1.42	1.10	0.78	0.53	0.31	0.17	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-120	0.75	0.69	0.59	0.50	0.40	0.31	0.21	0.13	0.08	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.15	0.14	0.12	0.10	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.02	0.04	0.05	0.06	0.07	0.07	0.07	0.06	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.09	0.18	0.27	0.33	0.39	0.42	0.43	0.42	0.40	0.36	0.29	0.23	0.14	0.06	0.00	0.00	0.00	0.00	
-60	0.20	0.40	0.57	0.73	0.86	0.94	0.99	0.99	0.94	0.85	0.72	0.58	0.42	0.27	0.11	0.00	0.00	0.00	
-50	1.63	2.13	2.28	2.07	1.75	1.64	1.62	1.64	1.60	1.48	1.29	1.04	0.77	0.51	0.27	0.06	0.00	0.00	
-40	10.5	14.3	15.4	14.0	11.2	8.13	5.19	3.06	2.32	2.12	1.89	1.56	1.17	0.78	0.42	0.13	0.00	0.00	
-30	409	353	262	154	75.4	38.7	21.0	11.1	5.30	2.97	2.47	2.07	1.58	1.05	0.60	0.21	0.00	0.00	
-20	1204	1042	830	589	370	183	73.4	30.8	13.3	5.38	3.07	2.53	1.94	1.31	0.73	0.28	0.00	0.00	
-10	1986	1880	1626	1182	716	391	177	65.6	24.5	9.20	3.90	2.90	2.23	1.50	0.84	0.32	0.00	0.00	
0	2074	2012	1835	1492	950	490	240	93.5	32.6	11.7	4.52	3.18	2.42	1.61	0.89	0.35	0.00	0.00	
10	1967	1841	1603	1233	743	403	198	80.1	31.7	13.0	5.84	3.82	2.66	1.69	0.94	0.38	0.02	0.00	
20	1301	1166	924	634	396	224	111	50.4	24.1	11.4	6.12	4.05	2.67	1.66	0.93	0.38	0.04	0.00	
30	469	404	318	228	148	87.1	49.8	28.5	15.8	8.93	5.65	3.75	2.43	1.52	0.87	0.35	0.05	0.00	
40	122	107	87.5	67.5	49.8	35.4	23.9	15.5	9.89	6.66	4.53	3.05	2.02	1.31	0.75	0.30	0.07	0.00	
50	41.6	37.2	31.9	26.2	20.6	15.5	11.4	8.43	6.16	4.44	3.15	2.24	1.58	1.06	0.61	0.24	0.08	0.00	
60	14.2	13.0	11.5	9.87	8.29	6.81	5.49	4.34	3.38	2.65	2.08	1.60	1.18	0.80	0.45	0.19	0.08	0.00	
70	4.75	4.47	4.13	3.78	3.41	3.05	2.69	2.36	2.02	1.70	1.39	1.09	0.79	0.53	0.32	0.19	0.08	0.00	
80	2.62	2.47	2.30	2.13	1.94	1.75	1.56	1.37	1.18	1.00	0.82	0.65	0.52	0.39	0.28	0.17	0.08	0.00	
90	1.32	1.24	1.16	1.09	1.01	0.93	0.85	0.78	0.70	0.62	0.54	0.47	0.39	0.31	0.23	0.16	0.08	0.00	
100	0.55	0.53	0.50	0.48	0.47	0.45	0.43	0.41	0.39	0.37	0.34	0.31	0.28	0.24	0.19	0.13	0.07	0.00	
110	0.00	0.00	0.00	0.01	0.03	0.07	0.12	0.15	0.17	0.18	0.18	0.19	0.18	0.17	0.15	0.11	0.06	0.00	
120	0.02	0.04	0.05	0.06	0.05	0.05	0.02	0.00	0.00	0.00	0.06	0.10	0.11	0.12	0.11	0.09	0.06	0.00	
130	0.53	0.56	0.54	0.48	0.39	0.35	0.26	0.18	0.10	0.04	0.00	0.00	0.05	0.07	0.08	0.07	0.05	0.00	
140	2.97	2.91	2.71	2.38	1.95	1.52	1.07	0.68	0.45	0.23	0.11	0.00	0.00	0.04	0.05	0.05	0.04	0.00	
150	6.85	6.73	6.33	5.64	4.76	3.76	2.75	1.87	1.13	0.63	0.29	0.11	0.00	0.01	0.03	0.04	0.03	0.00	
160	10.4	10.3	9.92	9.06	7.84	6.39	4.85	3.38	2.13	1.17	0.58	0.20	0.01	0.00	0.02	0.02	0.02	0.00	
170	13.2	13.0	12.5	11.7	10.3	8.55	6.64	4.74	3.05	1.75	0.86	0.32	0.08	0.00	0.01	0.01	0.01	0.00	
180	15.6	15.0	14.2	13.2	11.7	9.73	7.62	5.48	3.56	2.11	1.02	0.40	0.12	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: