

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2440.3 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	57.7V x 59.3H
	At 50% of Imax	36.7V x 36.5H
	At 90% of Imax	18.1V x 16.9H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	876.5 lumens per klm.
	To 50% of Imax	586.4 lumens per klm.
	To 90% of Imax	173.4 lumens per klm.
	Upward LOR	1.4 %
	Downward LOR	98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.06V I:1.313A P:11.40W PF:0.7197 Freq:59.98Hz Lamp Flux:833.073x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

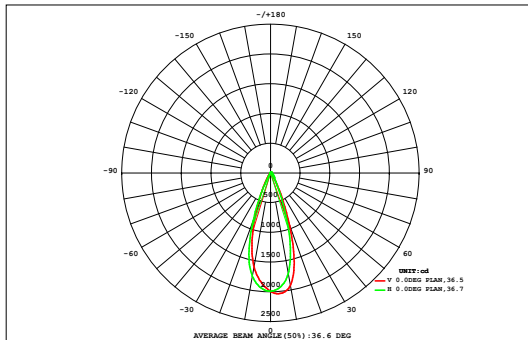

DATA OF LAMP		Eff:73.08lm/W	
MODEL	D7A1-12W-BZ	Imax (cd)	2033
NOMINAL POWER (W)	12	AVAILABILITY (%)	87.5
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	728.6
NOMINAL FLUX (lm)	833.073	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	833.1
TEST VOLTAGE (V)	12	θ @50% (H,V)	37,37DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.04	0.08	0.12	0.17	0.24	0.31	0.38	0.43	0.48	0.47	0.43	0.37	0.30	0.23	0.17	0.11	0.07	0.04	4.46	0.00
45	0.06	0.11	0.17	0.26	0.36	0.46	0.57	0.67	0.73	0.73	0.67	0.58	0.46	0.35	0.25	0.16	0.10	0.06	6.76	0.00
40	0.08	0.15	0.24	0.36	0.52	0.69	0.88	1.04	1.15	1.16	1.07	0.91	0.71	0.52	0.36	0.23	0.14	0.08	10.3	0.00
35	0.11	0.20	0.32	0.50	0.75	1.07	1.44	1.81	2.05	2.07	1.88	1.52	1.13	0.79	0.51	0.32	0.18	0.10	16.7	8.35
30	0.13	0.25	0.42	0.69	1.11	1.76	2.63	3.52	4.11	4.19	3.70	2.83	1.92	1.22	0.74	0.42	0.24	0.12	30.0	24.5
25	0.16	0.29	0.53	0.93	1.69	2.97	4.73	6.50	7.63	7.82	6.96	5.22	3.32	1.91	1.05	0.56	0.29	0.15	52.7	48.3
20	0.18	0.34	0.64	1.24	2.47	4.60	7.35	9.84	11.3	11.6	10.7	8.36	5.33	2.86	1.44	0.71	0.35	0.17	79.5	75.8
15	0.19	0.37	0.74	1.55	3.26	6.13	9.50	12.2	13.6	14.1	13.4	11.1	7.39	3.89	1.84	0.85	0.39	0.18	101	97.3
10	0.19	0.38	0.79	1.74	3.75	6.99	10.5	13.1	14.6	15.1	14.7	12.6	8.76	4.63	2.11	0.94	0.41	0.18	111	108
5	0.18	0.37	0.77	1.73	3.78	7.07	10.6	13.1	14.6	15.1	14.7	12.7	8.83	4.65	2.10	0.91	0.39	0.17	112	109
0	0.16	0.32	0.67	1.49	3.30	6.32	9.77	12.4	13.8	14.2	13.6	11.3	7.58	3.93	1.78	0.78	0.34	0.15	102	98.7
-5	0.13	0.26	0.53	1.12	2.45	4.81	7.78	10.4	11.9	12.2	11.2	8.79	5.54	2.84	1.31	0.60	0.27	0.12	82.2	78.7
-10	0.10	0.20	0.38	0.74	1.53	3.01	5.06	7.09	8.44	8.62	7.55	5.55	3.37	1.75	0.85	0.41	0.20	0.09	54.9	51.2
-15	0.07	0.14	0.25	0.46	0.83	1.53	2.58	3.72	4.49	4.56	3.89	2.78	1.69	0.94	0.50	0.26	0.13	0.06	28.9	24.2
-20	0.05	0.09	0.16	0.26	0.43	0.68	1.04	1.44	1.71	1.74	1.51	1.12	0.75	0.47	0.27	0.15	0.08	0.04	12.0	4.43
-25	0.03	0.06	0.09	0.14	0.21	0.30	0.40	0.49	0.53	0.54	0.51	0.43	0.32	0.21	0.14	0.08	0.04	0.02	4.55	0.00
-30	0.02	0.03	0.05	0.07	0.10	0.12	0.15	0.16	0.16	0.16	0.17	0.15	0.12	0.09	0.06	0.04	0.02	0.01	1.69	0.00
-35	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.04	0.03	0.03	0.04	0.05	0.04	0.04	0.03	0.02	0.01	0.01	0.56	0.00
-40																				
-45																				
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	1.91	3.64	6.89	13.5	26.8	48.9	75.4	97.8	111	114	107	86.4	57.6	31.3	15.5	7.55	3.65	1.74	811	---
Φ a	0.00	0.00	0.00	5.84	21.4	44.3	71.2	93.9	108	111	103	82.3	53.2	26.3	8.97	0.00	0.00	0.00	---	729

one-half-peak spread: U:18.9,D:17.9 , L:21.2,R:15.5


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.06V I:1.313A P:11.40W PF:0.7197 Freq:59.98Hz Lamp Flux:833.073x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

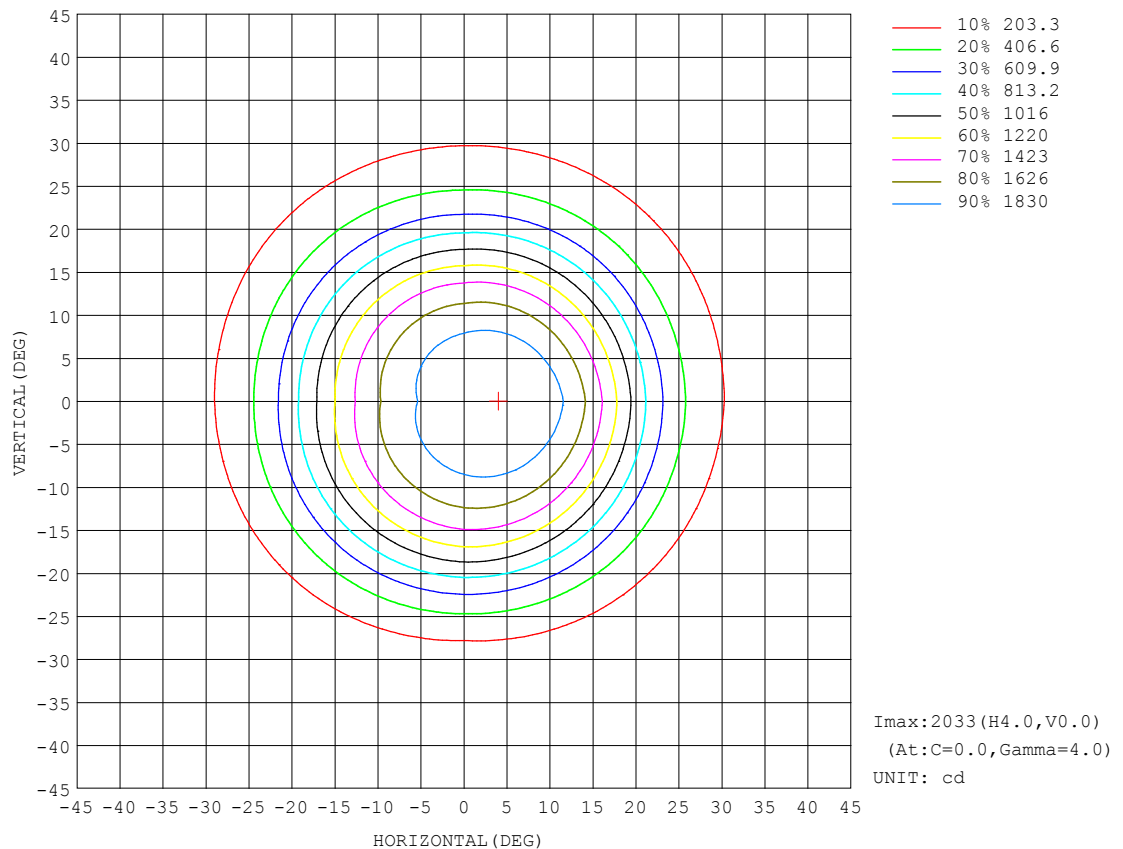


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.06V I:1.313A P:11.40W PF:0.7197 Freq:59.98Hz Lamp Flux:833.073x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

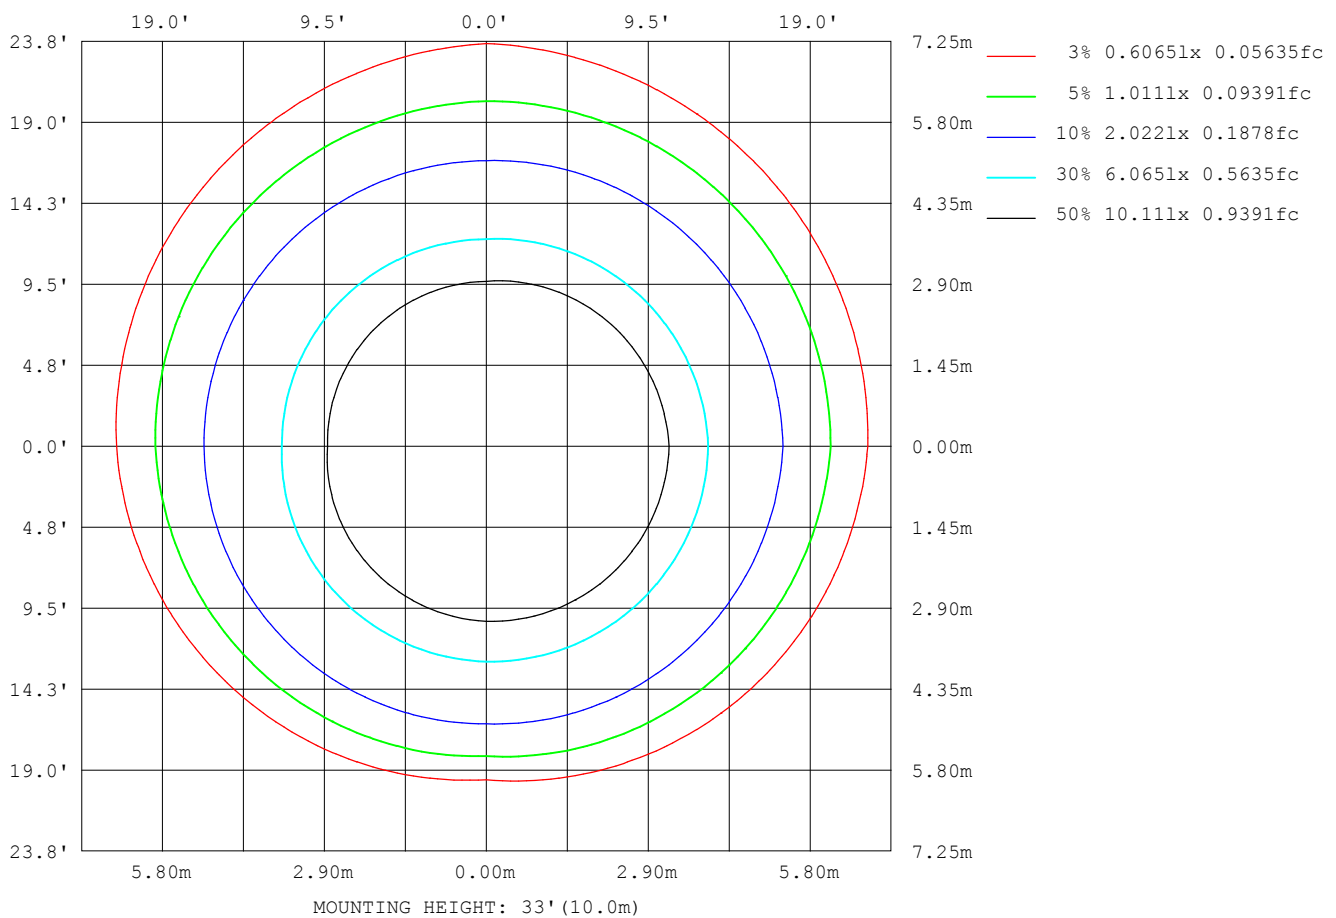

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

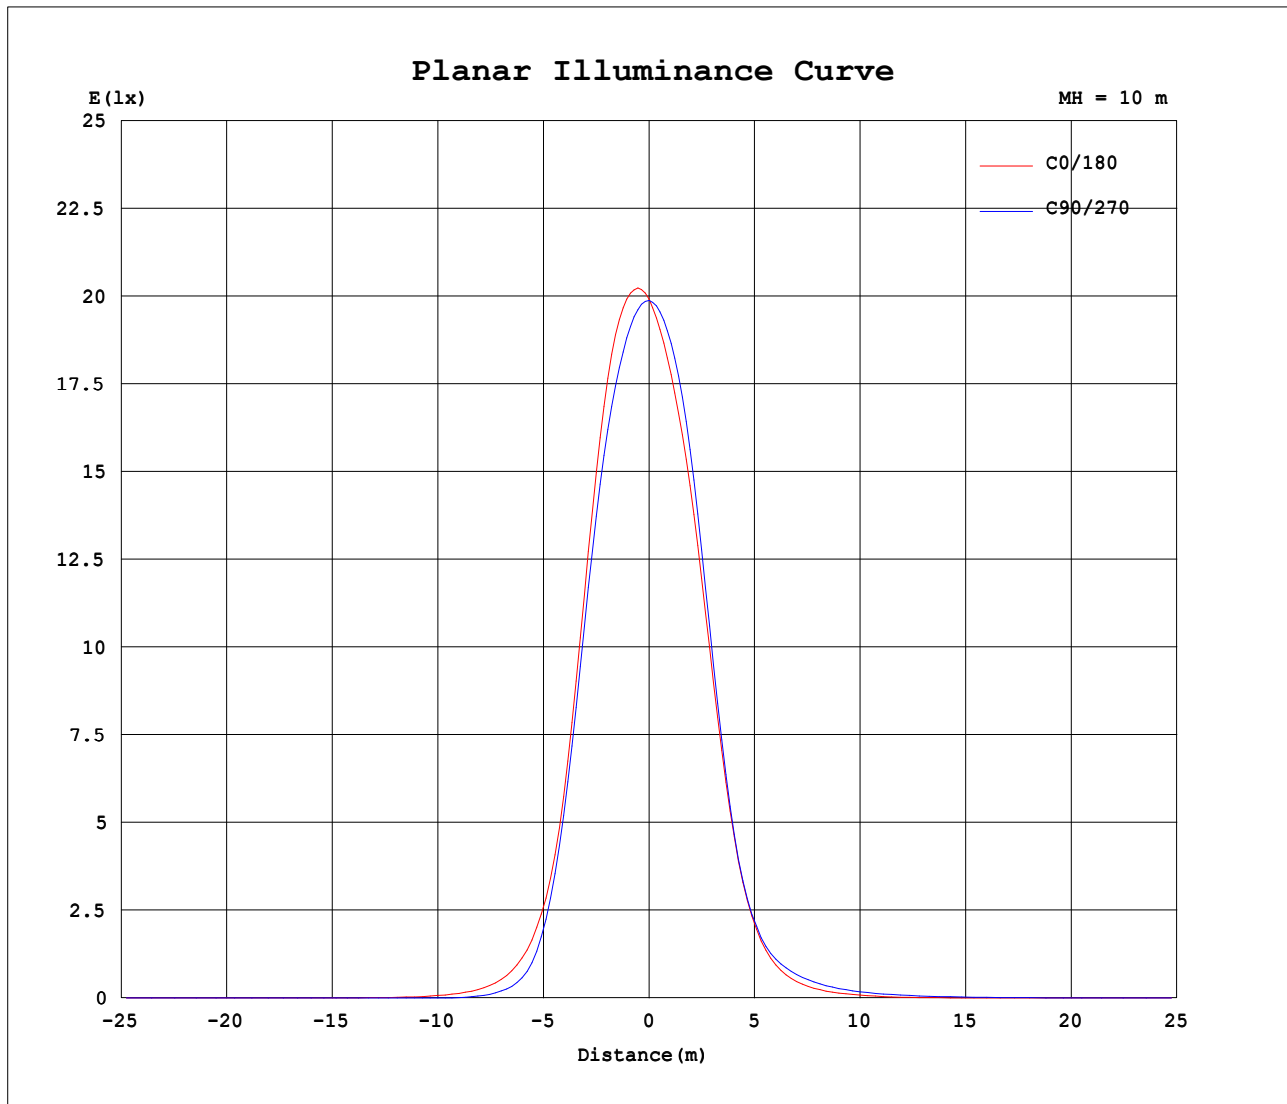


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.06V I:1.313A P:11.40W PF:0.7197 Freq:59.98Hz Lamp Flux:833.073x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

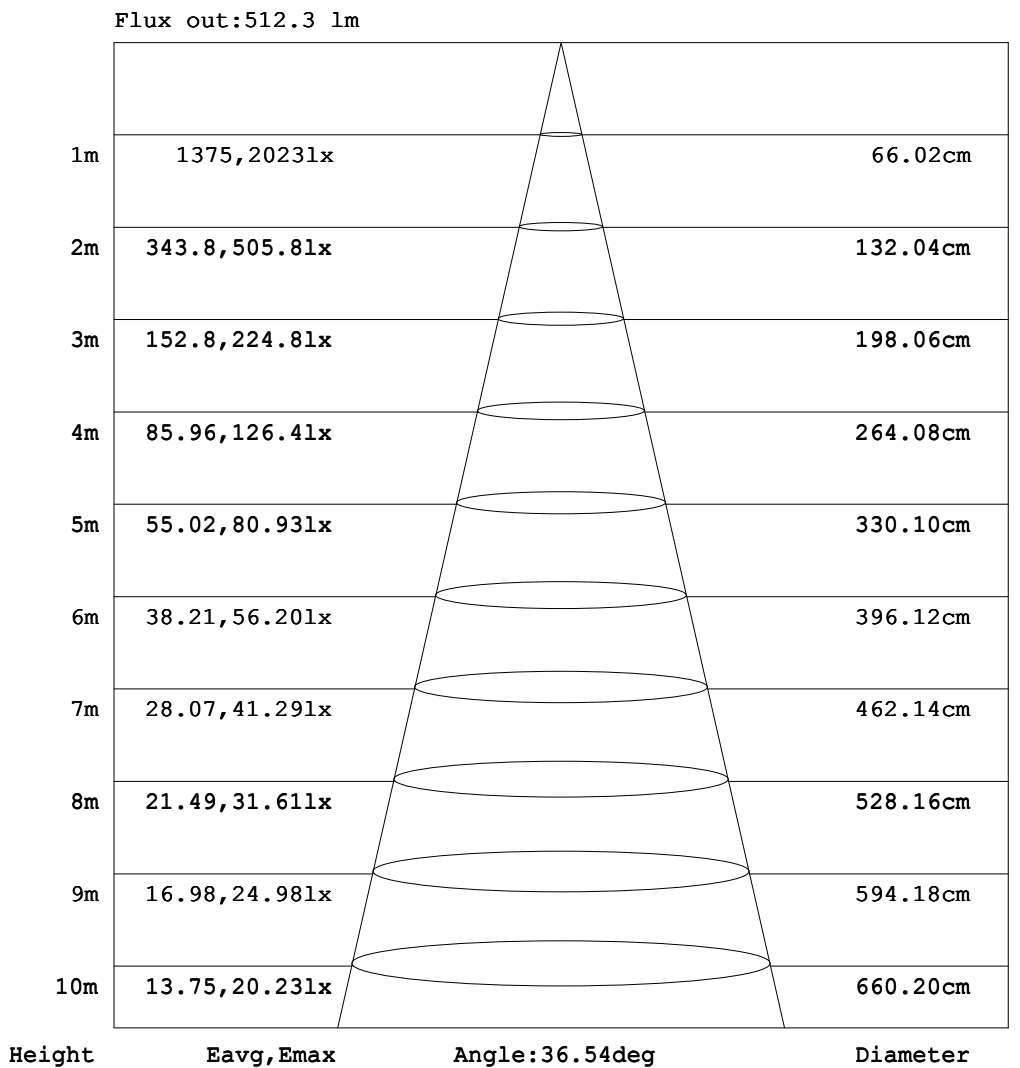

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.06V I:1.313A P:11.40W PF:0.7197 Freq:59.98Hz Lamp Flux:833.073x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	CW WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.29	0.85	1.88	3.31	5.11	6.98	8.72	10.1	11.1	11.9	12.3
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.06	0.33	0.87	1.84	3.24	4.95	6.79	8.55	10.1	11.1	11.8	12.2
-160	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.08	0.25	0.67	1.39	2.47	3.82	5.35	6.89	8.28	9.43	10.3	10.8
-150	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.15	0.38	0.80	1.43	2.28	3.28	4.33	5.34	6.19	6.82	7.19
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.19	0.35	0.63	1.01	1.47	2.01	2.54	3.00	3.38	3.61
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.10	0.16	0.23	0.35	0.49	0.66	0.85	1.02	1.16	1.26
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.08	0.12	0.16	0.21	0.25	0.29	0.33	0.35
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.03
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.08	0.09	0.11	0.11	0.11	0.12	0.10	0.08	0.05	0.03	0.00
-60	0.00	0.00	0.00	0.00	0.01	0.10	0.14	0.19	0.25	0.30	0.31	0.29	0.29	0.27	0.26	0.22	0.16	0.09	0.00
-50	0.00	0.00	0.00	0.01	0.12	0.20	0.31	0.42	0.43	0.51	0.67	0.93	1.27	1.59	1.75	1.68	1.31	0.72	0.00
-40	0.00	0.00	0.00	0.10	0.20	0.35	0.48	0.58	0.87	1.57	2.84	4.49	6.24	8.27	9.54	10.7	11.2	10.7	8.35
-30	0.00	0.00	0.00	0.13	0.29	0.52	0.63	1.05	2.31	4.92	8.81	14.9	22.6	34.2	51.4	71.6	94.9	114	118
-20	0.00	0.00	0.01	0.17	0.39	0.57	0.90	2.02	5.10	10.8	20.8	35.9	63.6	114	217	392	606	784	865
-10	0.00	0.00	0.02	0.21	0.43	0.67	1.19	3.24	8.28	18.7	34.9	65.4	130	279	577	996	1396	1652	1765
0	0.00	0.00	0.02	0.23	0.46	0.74	1.39	3.99	10.2	23.8	44.6	85.4	175	373	742	1219	1607	1844	1991
10	0.00	0.01	0.04	0.25	0.52	0.91	1.82	4.67	11.1	23.9	43.6	78.3	146	288	559	951	1343	1608	1720
20	0.00	0.02	0.05	0.24	0.54	0.96	1.89	4.24	9.55	18.8	34.4	56.7	92.1	149	244	388	562	708	767
30	0.00	0.02	0.06	0.24	0.48	0.94	1.64	3.24	6.68	12.7	21.8	35.4	52.3	74.4	102	132	162	186	196
40	0.00	0.03	0.07	0.23	0.41	0.72	1.25	2.20	3.97	7.10	12.0	18.5	26.5	36.3	46.7	57.2	66.8	74.5	79.1
50	0.00	0.03	0.07	0.14	0.33	0.52	0.83	1.35	2.12	3.40	5.31	7.97	11.5	15.5	19.7	23.8	27.6	30.7	32.8
60	0.00	0.04	0.08	0.13	0.22	0.40	0.54	0.74	1.04	1.47	2.04	2.81	3.83	4.98	6.24	7.53	8.74	9.76	10.5
70	0.00	0.04	0.08	0.13	0.19	0.26	0.34	0.50	0.61	0.72	0.86	1.01	1.19	1.38	1.60	1.82	2.03	2.20	2.34
80	0.00	0.04	0.08	0.12	0.16	0.21	0.27	0.32	0.38	0.45	0.52	0.59	0.66	0.73	0.80	0.87	0.94	1.00	1.06
90	0.00	0.04	0.07	0.11	0.15	0.18	0.22	0.26	0.29	0.33	0.37	0.40	0.44	0.48	0.51	0.55	0.59	0.62	0.66
100	0.00	0.03	0.07	0.10	0.12	0.14	0.16	0.18	0.19	0.20	0.21	0.22	0.23	0.24	0.25	0.26	0.27	0.28	0.30
110	0.00	0.03	0.06	0.08	0.09	0.09	0.10	0.09	0.09	0.08	0.07	0.05	0.04	0.03	0.01	0.01	0.00	0.00	0.00
120	0.00	0.03	0.05	0.06	0.06	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.02	0.04	0.04	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.02	0.03	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.03	0.12	0.25	0.46	0.76	1.01	1.24	1.38	1.39
150	0.00	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.10	0.32	0.72	1.33	2.08	2.85	3.57	4.14	4.48	4.56
160	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.09	0.37	0.93	1.82	2.98	4.30	5.60	6.74	7.59	8.10	8.21
170	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.01	0.22	0.68	1.56	2.86	4.46	6.18	7.81	9.14	10.0	10.5	10.6
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.29	0.85	1.88	3.31	5.11	6.98	8.72	10.1	11.1	11.9	12.3

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.06V I:1.313A P:11.40W PF:0.7197 Freq:59.98Hz Lamp Flux:833.073x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	12.4	12.1	11.5	10.4	8.60	6.67	4.79	3.15	1.84	0.92	0.41	0.12	0.00	0.00	0.00	0.00	0.00	0.00	
-170	12.1	11.8	11.0	9.73	8.03	6.20	4.45	2.91	1.69	0.85	0.36	0.12	0.01	0.00	0.00	0.00	0.00	0.00	
-160	10.5	9.93	8.97	7.71	6.27	4.78	3.39	2.20	1.25	0.66	0.27	0.05	0.01	0.00	0.00	0.00	0.00	0.00	
-150	6.99	6.52	5.81	4.92	3.94	2.95	2.04	1.28	0.74	0.37	0.17	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-140	3.49	3.21	2.83	2.36	1.84	1.35	0.92	0.58	0.34	0.18	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-130	1.20	1.10	0.96	0.81	0.63	0.47	0.31	0.21	0.10	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.33	0.31	0.27	0.21	0.16	0.12	0.08	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.02	0.04	0.05	0.06	0.07	0.07	0.07	0.06	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.06	0.11	0.15	0.18	0.21	0.23	0.23	0.22	0.20	0.16	0.12	0.07	0.03	0.00	0.00	0.00	0.00	0.00	
-50	0.57	1.02	1.25	1.25	1.06	0.80	0.59	0.44	0.39	0.35	0.27	0.19	0.12	0.04	0.00	0.00	0.00	0.00	
-40	10.7	11.1	10.3	8.67	6.96	5.02	3.41	1.91	0.98	0.57	0.47	0.34	0.22	0.11	0.02	0.00	0.00	0.00	
-30	118	101	77.7	55.3	35.3	22.0	13.1	7.09	3.58	1.45	0.68	0.51	0.33	0.18	0.05	0.00	0.00	0.00	
-20	814	648	430	246	131	70.0	36.1	18.8	8.63	3.64	1.26	0.63	0.44	0.24	0.09	0.00	0.00	0.00	
-10	1748	1562	1163	675	328	153	71.7	34.1	15.9	6.40	2.06	0.78	0.53	0.30	0.11	0.00	0.00	0.00	
0	2032	1920	1541	946	459	212	96.9	44.6	20.7	8.14	2.58	0.89	0.57	0.33	0.12	0.00	0.00	0.00	
10	1704	1509	1119	657	337	169	84.5	42.8	21.1	9.23	3.49	1.40	0.77	0.39	0.15	0.02	0.01	0.00	
20	737	603	425	273	166	98.5	56.9	32.4	16.6	8.08	3.49	1.62	0.84	0.39	0.17	0.04	0.02	0.00	
30	190	168	138	105	75.6	51.7	33.6	20.0	11.4	5.83	2.87	1.52	0.76	0.37	0.16	0.06	0.02	0.00	
40	74.4	66.6	56.7	45.8	35.0	25.2	17.4	11.1	6.51	3.66	2.09	1.11	0.59	0.31	0.14	0.07	0.03	0.00	
50	30.5	27.3	23.4	19.2	14.9	11.0	7.64	5.07	3.28	2.03	1.20	0.71	0.43	0.26	0.13	0.07	0.03	0.00	
60	9.73	8.68	7.45	6.16	4.91	3.77	2.76	1.95	1.37	0.94	0.67	0.47	0.33	0.21	0.13	0.08	0.04	0.00	
70	2.20	2.01	1.79	1.56	1.33	1.15	0.96	0.81	0.68	0.56	0.43	0.33	0.26	0.19	0.13	0.08	0.04	0.00	
80	1.00	0.94	0.87	0.80	0.73	0.66	0.59	0.52	0.45	0.38	0.32	0.27	0.21	0.16	0.12	0.08	0.04	0.00	
90	0.62	0.59	0.55	0.51	0.48	0.44	0.40	0.37	0.33	0.29	0.26	0.22	0.18	0.15	0.11	0.07	0.04	0.00	
100	0.28	0.27	0.26	0.25	0.24	0.23	0.22	0.21	0.20	0.19	0.18	0.16	0.14	0.12	0.10	0.07	0.03	0.00	
110	0.00	0.00	0.01	0.01	0.03	0.04	0.05	0.07	0.08	0.09	0.09	0.10	0.09	0.09	0.08	0.06	0.03	0.00	
120	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.06	0.06	0.05	0.03	0.00	
130	0.06	0.12	0.15	0.17	0.15	0.12	0.08	0.06	0.00	0.00	0.00	0.01	0.02	0.04	0.04	0.04	0.02	0.00	
140	1.49	1.45	1.31	1.11	0.83	0.58	0.40	0.27	0.15	0.07	0.00	0.00	0.00	0.02	0.03	0.03	0.02	0.00	
150	4.65	4.47	4.05	3.44	2.73	1.99	1.32	0.79	0.46	0.22	0.09	0.00	0.00	0.01	0.02	0.02	0.01	0.00	
160	8.37	8.09	7.43	6.42	5.22	3.94	2.74	1.75	0.95	0.51	0.19	0.02	0.00	0.00	0.01	0.01	0.01	0.00	
170	10.9	10.7	10.1	8.99	7.43	5.72	4.07	2.64	1.51	0.75	0.31	0.10	0.00	0.00	0.00	0.01	0.00	0.00	
180	12.4	12.1	11.5	10.4	8.60	6.67	4.79	3.15	1.84	0.92	0.41	0.12	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: