

# LumienCORE




**N4B1-1.5W-27K-15-A**  
**N4B1-1.5W-30K-15-A**  
**N4B1-1.5W-27K-30-A**  
**N4B1-1.5W-30K-30-A**

Nano Module  
 IP68 Rated (waterproof)



## SPECIFICATIONS

Fixture Type	Fixture Components	Fixture Material	Fixture Style	Watts	Color Temperature	Beam Spread	Finish
N (Nano)	4 (Integrated Modular)	B (Brass)	1 (ML)	1.5W (1.5W)	27K (2700K) 30K (3000K)	15° 30°	A (Antiqued)

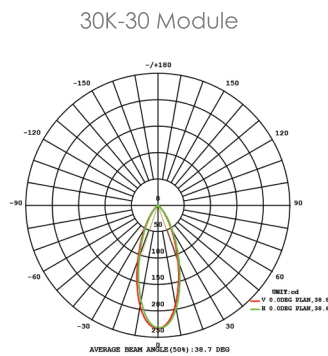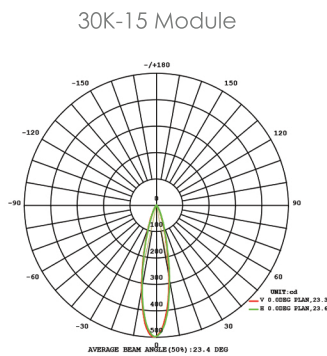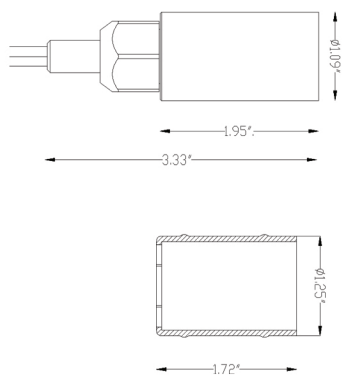

Construction: Brass  
 Finish: Antique Brush  
 Lead Wire: 6ft long  
 Light Source: Modular LED  
 Wattage: 1.5W  
 Operating Voltage: 10-15V  
 Lumens: 125 LM  
 Beam Spread: 15° & 30°  
 Color Temperature: 2700K or 3000K  
 Volt Amps: 2.56  
 RGB: No  
 CRI: 80+  
 Rated Life: 50,000 Hrs  
 Dimmable: Primary Dimming Capable

## ACCESSORIES



LAB-118



LAB-146



LAB-119



LAB-115

## WARRANTY

Lifetime Warranty on the Housing,  
 10 Year Warranty on the LED Light Source

## CERTIFICATION

UL Listed I File #E501872

Lumien Lighting reserves the right to modify the design of our products at any time and data listed on spec sheets is subject to change.