


## M4A1-3.5W-30K-60-BK

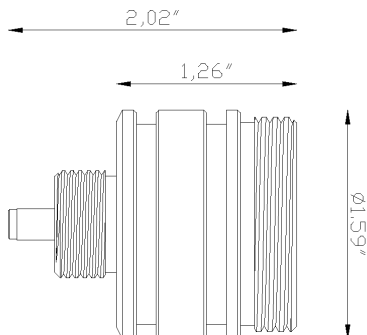

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

CAT #: \_\_\_\_\_


### DESCRIPTION

**Micro, Integrated Modular, Aluminum - Black, 3.5W, 326 Lm, 3000K, 60°, 10-15V**

### SPECIFICATIONS

|                       |          |
|-----------------------|----------|
| <b>Construction</b>   | Aluminum |
| <b>Finish</b>         | Black    |
| <b>Lead Wire</b>      | 6'       |
| <b>Voltage</b>        | 10-15V   |
| <b>Light Warranty</b> | 10 Years |

### FINISHES



Black

### NOTES

---

---

---

---

---

---

---

#### Lumien Lighting

770-485-9002  
orders@lumienlighting.com  
www.lumienlighting.com

Lumien Lighting reserves the right to modify product specifications without notification. © 2023 Lumien Enterprise Inc.



# ORDERING GUIDE

| MODULE TYPE<br>(required) | WATTS | COLOR<br>TEMP | BEAM<br>SPREAD | FINISH | ACCESSORIES |
|---------------------------|-------|---------------|----------------|--------|-------------|
|---------------------------|-------|---------------|----------------|--------|-------------|

M4A1-3.5W-30K-60-BK

+

CORE: M4A1

-

3.5W

5.5W

-

2700K

3000K

-

40°

60°

-

BK

+

M4A1-3.5W-30K-60-BK

+

PRO: M7A1

-

4.5W

-

2700-5700K

-

40°

-

BK

+

M4A1-3.5W-30K-60-BK

+

PRO: M8A1

-

3W

-

2700-5700K

-

40°

-

BK

+

|                     | CORE                                                                                     | CORE                                                                                     | PRO             | PRO                                    |
|---------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------|----------------------------------------|
|                     | M4A1-3.5W-27K-40-BK<br>M4A1-3.5W-27K-60-BK<br>M4A1-3.5W-30K-40-BK<br>M4A1-3.5W-30K-60-BK | M4A1-5.5W-27K-40-BK<br>M4A1-5.5W-27K-60-BK<br>M4A1-5.5W-30K-40-BK<br>M4A1-5.5W-30K-60-BK | M7A1-4.5W-40-BK | M8A1-3W-27K-40-BK<br>M8A1-3W-30K-40-BK |
| Construction        | Aluminum                                                                                 | Aluminum                                                                                 | Aluminum        | Aluminum                               |
| Finish              | Black                                                                                    | Black                                                                                    | Black           | Black                                  |
| Input Voltage       | 10-15V                                                                                   | 10-15V                                                                                   | 10-15V          | 10-15V                                 |
| Wattage (Volt Amps) | 3.5W (5.59)                                                                              | 5.5W (8.66)                                                                              | 4.5W (6.12)     | 3W (4.83)                              |
| Module Lumens       | 316 Lm, 318 Lm, 327 Lm,                                                                  | 428 Lm, 420 Lm, 472 Lm,                                                                  | 317-352 Lm      | 27K: 129 Lm, R: 57 Lm, G:              |
| Color Temperature   | 2700K, 3000K                                                                             | 2700K, 3000K                                                                             | 2700-5700K      | 2700-5700K                             |
| Beam Spread         | 40°, 60°                                                                                 | 40°, 60°                                                                                 | 40°             | 40°                                    |
| Lead Wire Length    | 6'                                                                                       | 6'                                                                                       | 6'              | 6'                                     |
| CRI                 | 80+                                                                                      | 80+                                                                                      | 80+             | 80+                                    |
| RGB                 | No                                                                                       | No                                                                                       | No              | Yes                                    |
| Dimmable            | Primary Dimming                                                                          | Primary Dimming                                                                          | Primary Dimming | Primary Dimming                        |
| Rated Life          | 50,000 Hrs                                                                               | 50,000 Hrs                                                                               | 50,000 Hrs      | 50,000 Hrs                             |
| Warranty            | 10 Years                                                                                 | 10 Years                                                                                 | 10 Years        | 10 Years                               |
| Core Drill Size     | -                                                                                        | -                                                                                        | -               | -                                      |