




Together, we are brighter.

LAA-070-BK

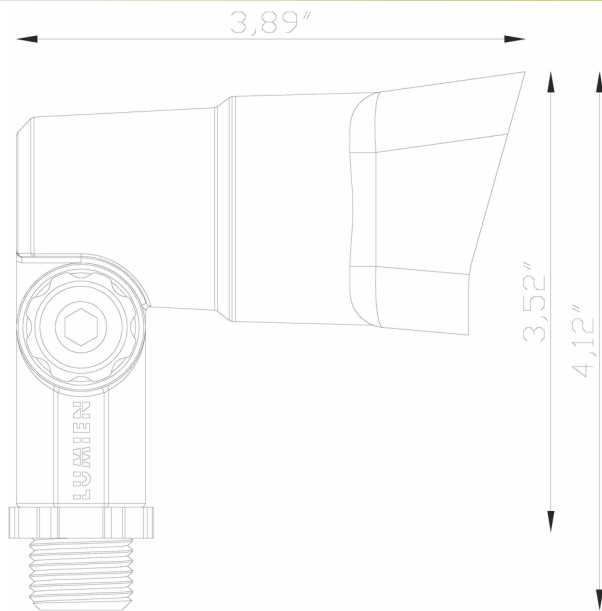

PROJECT: _____

TYPE: _____

CAT #: _____


DESCRIPTION

Accessory, Aluminum - Black, Micro, 57°/67° Flood Package

SPECIFICATIONS

Construction	Aluminum
Finish	Black
Lead Wire	6'
Voltage	10-15V
Mounting	LAP-002 (8" Stake)
Light Warranty	10 Years

FINISHES



Black

NOTES

Lumien Lighting

770-485-9002
orders@lumienlighting.com
www.lumienlighting.com

Lumien Lighting reserves the right to modify product specifications without notification. © 2023 Lumien Enterprise Inc.

MODULE TYPE (required)	WATTS	COLOR TEMP	BEAM SPREAD	FINISH	ACCESSORIES
---------------------------	-------	---------------	----------------	--------	-------------

LAA-070-BK



CORE: M4A1

- - - -

3.5W 2700K 40° BK

5.5W 3000K 60°



Additional Mounts - Ground (Optional)

- LAS-003** Stainless Steel, 1/2" Threaded Mini Stake,
LAS-002-6 Stainless Steel, Trident Stake, 6"
LAS-002 Stainless Steel, Trident Stake, 12"
LAP-018 Plastic, 1/2" Threaded 8" Spike w/ ADJ

LAA-070-BK



PRO: M7A1

- - - -

4.5W 2700-5700K 40° BK



LAA-070-BK



PRO: M8A1

- - - -

3W 2700-5700K 40° BK



	CORE	CORE	PRO	PRO
	M4A1-3.5W-27K-40-BK M4A1-3.5W-27K-60-BK M4A1-3.5W-30K-40-BK M4A1-3.5W-30K-60-BK	M4A1-5.5W-27K-40-BK M4A1-5.5W-27K-60-BK M4A1-5.5W-30K-40-BK M4A1-5.5W-30K-60-BK	M7A1-4.5W-40-BK	M8A1-3W-27K-40-BK M8A1-3W-30K-40-BK
Construction	Aluminum	Aluminum	Aluminum	Aluminum
Finish	Black	Black	Black	Black
Input Voltage	10-15V	10-15V	10-15V	10-15V
Wattage (Volt Amps)	3.5W (5.59)	5.5W (8.66)	4.5W (6.12)	3W (4.83)
Module Lumens	316 Lm, 318 Lm, 327 Lm,	428 Lm, 420 Lm, 472 Lm,	317-352 Lm	27K: 129 Lm, R: 57 Lm, G:
Color Temperature	2700K, 3000K	2700K, 3000K	2700-5700K	2700-5700K
Beam Spread	40°, 60°	40°, 60°	40°	40°
Lead Wire Length	6'	6'	6'	6'
CRI	80+	80+	80+	80+
RGB	No	No	No	Yes
Dimmable	Primary Dimming	Primary Dimming	With LumienPRO Remote	With LumienPRO Remote
Rated Life	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Warranty	10 Years	10 Years	10 Years	10 Years
Core Drill Size	-	-	-	-

Additional Mounts - Ground



LAS-003

Accessory, Stainless Steel,
1/2" Threaded Mini Stake, 6"



LAS-002-6

Accessory, Stainless Steel,
Trident Stake, 6"



LAS-002

Accessory, Stainless Steel,
Trident Stake, 12"



LAP-018

Accessory, Plastic, 1/2"
Threaded 8" Spike with
Adjustable Collar