



F6B1-5W-27K-A
F6B1-5W-30K-A
F6B1-10W-27K-A
F6B1-10W-30K-A

Modular Light Source
Flood Light
Antique Brush Brass



SPECIFICATIONS

Fixture Type	Fixture Components	Fixture Material	Fixture Style	Watts	Color Temperature	Finish
F (Flood)	6 (Integrated Modular Variable)	B (Brass)	1 (UP)	5W 10W	27K (2700K) 30K (3000K)	A (Antiqued)

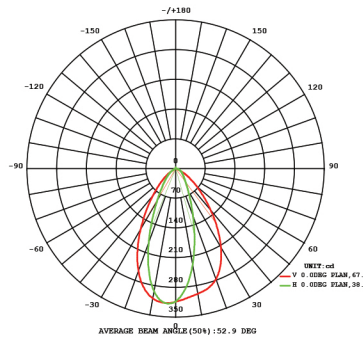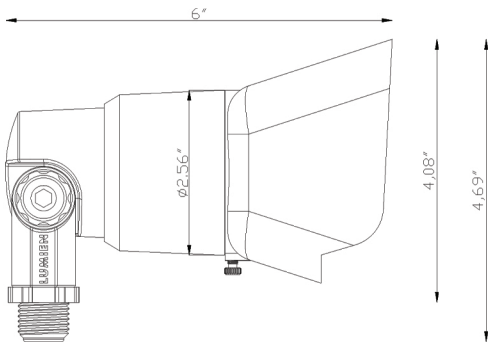

Construction: Brass
Finish: Antique Brush
Lead Wire: 6ft long
Light Source: Modular LED
Wattage: 5W or 10W
Operating Voltage: 10-15V
Lumens: 320LM or 500LM
Beam Spread: 52°
Color Temperature: 2700K or 3000K
Volt Amps: 6.98 or 14.09
RGB: No
CRI: 80+
Rated Life: 50,000 Hrs
Dimmable: Primary Dimming Capable

APPLICATION

Environment: Wet, Damp or Dry Area approved.
Installation: Mounts to our 12" Spike (LAP-001) or 8" Spike (LAP-002)
Included Optic Lenses (In The Box):
15* Lens
40* Lens
60* Lens

ACCESSORIES



WARRANTY

Lifetime Warranty on the Housing,
10 Year Warranty on the LED Light Source

CERTIFICATION

UL Listed I File #E501872

Lumien Lighting reserves the right to modify the design of our products at any time and data listed on spec sheets is subject to change.