

## Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		6993.8 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	36.5V x 36.3H
	At 50% of Imax	18.5V x 18.2H
	At 90% of Imax	7.0V x 6.4H
Beam Flux	Total	1001.0 lumens per klm.
	To 10% of Imax	788.0 lumens per klm.
	To 50% of Imax	407.0 lumens per klm.
	To 90% of Imax	84.9 lumens per klm.
	Upward LOR	1.2 %
	Downward LOR	98.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-07-13

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.24V I:0.3370A P:2.750W PF:0.6667 Freq:59.99Hz Lamp Flux:167.226x1 lm		
NAME: LED LANDSCAPE LAMP	TYPE:Nano Knuckle 3W 2700K	WEIGHT:
SPEC.:15°lens	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:

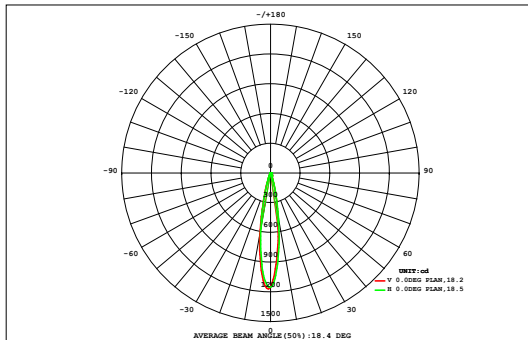

DATA OF LAMP		Eff:60.82lm/W	
MODEL	N4B3-3W-27K-15-A	Imax(cd)	1170
NOMINAL POWER(W)	3	AVAILABILITY(%)	79.1
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	132.2
NOMINAL FLUX(lm)	167.226	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	167.2
TEST VOLTAGE(V)	12	θ @50%(H,V)	18,19DEG

	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.03	0.04	0.05	0.05	0.06	0.07	0.07	0.08	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.90	0.00
27	0.02	0.03	0.04	0.05	0.05	0.06	0.07	0.07	0.08	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.02	1.31	0.00
24	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.11	0.12	0.11	0.11	0.10	0.08	0.07	0.06	0.04	0.03	0.02	2.02	0.00
21	0.04	0.05	0.07	0.09	0.11	0.14	0.17	0.19	0.20	0.20	0.18	0.15	0.13	0.10	0.08	0.06	0.04	0.03	3.38	1.27
18	0.05	0.06	0.09	0.12	0.17	0.23	0.30	0.36	0.39	0.38	0.33	0.27	0.20	0.14	0.11	0.08	0.06	0.04	5.71	4.31
15	0.06	0.08	0.12	0.18	0.27	0.40	0.54	0.66	0.72	0.70	0.61	0.47	0.33	0.22	0.14	0.10	0.07	0.05	9.09	7.92
12	0.07	0.10	0.16	0.26	0.42	0.64	0.89	1.11	1.20	1.16	1.00	0.77	0.52	0.33	0.20	0.13	0.08	0.06	13.4	12.4
9	0.08	0.12	0.20	0.35	0.59	0.94	1.35	1.70	1.85	1.78	1.50	1.11	0.75	0.45	0.26	0.15	0.10	0.07	17.6	16.7
6	0.09	0.14	0.25	0.44	0.77	1.26	1.82	2.30	2.53	2.41	1.99	1.44	0.94	0.57	0.32	0.18	0.11	0.07	20.6	19.7
3	0.09	0.15	0.28	0.51	0.89	1.50	2.16	2.74	3.04	2.87	2.29	1.64	1.06	0.64	0.35	0.20	0.12	0.08	21.0	20.0
0	0.10	0.16	0.28	0.51	0.91	1.52	2.19	2.79	3.10	2.92	2.34	1.67	1.08	0.65	0.36	0.20	0.12	0.08	18.7	17.8
-3	0.09	0.15	0.26	0.46	0.80	1.32	1.92	2.42	2.71	2.59	2.12	1.53	1.01	0.60	0.34	0.19	0.12	0.07	14.8	13.8
-6	0.08	0.13	0.22	0.38	0.64	1.02	1.48	1.87	2.08	2.00	1.67	1.24	0.83	0.50	0.29	0.17	0.11	0.07	10.6	9.47
-9	0.07	0.11	0.18	0.29	0.47	0.72	1.02	1.29	1.44	1.40	1.18	0.89	0.60	0.38	0.23	0.15	0.09	0.06	6.94	5.65
-12	0.06	0.09	0.14	0.21	0.32	0.47	0.64	0.80	0.89	0.87	0.75	0.58	0.41	0.27	0.18	0.12	0.08	0.05	4.39	2.76
-15	0.05	0.07	0.10	0.15	0.21	0.30	0.39	0.47	0.52	0.51	0.45	0.36	0.27	0.19	0.13	0.09	0.07	0.05	2.76	0.35
-18	0.04	0.06	0.08	0.11	0.14	0.19	0.23	0.28	0.30	0.30	0.26	0.22	0.17	0.13	0.10	0.07	0.05	0.04	1.79	0.00
-21	0.03	0.04	0.06	0.08	0.10	0.12	0.15	0.16	0.18	0.17	0.16	0.14	0.11	0.09	0.07	0.05	0.04	0.03	1.20	0.00
-24	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.10	0.11	0.11	0.10	0.09	0.08	0.06	0.05	0.04	0.03	0.02	---	---
-27	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.10	0.11	0.11	0.10	0.09	0.08	0.06	0.05	0.04	0.03	0.02	---	---
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL( DEG)	6	9	12	15	18	21	24	27			
Φ t	1.08	1.63	2.60	4.31	7.02	11.0	15.5	19.4	21.5	20.6	17.1	12.7	8.63	5.45	3.31	2.05	1.34	0.90	156	---
Φ a	0.00	0.00	0.33	2.72	5.73	9.87	14.5	18.5	20.5	19.6	16.1	11.7	7.41	4.01	1.15	0.00	0.00	0.00	---	132

one-half-peak spread: U:9.5,D:9.2 , L:9.5,R:8.9


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-07-13

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:12.24V I:0.3370A P:2.750W PF:0.6667 Freq:59.99Hz Lamp Flux:167.226x1 lm		
NAME: LED LANDSCAPE LAMP	TYPE:Nano Knuckle 3W 2700K	WEIGHT:
SPEC.:15°lens	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:

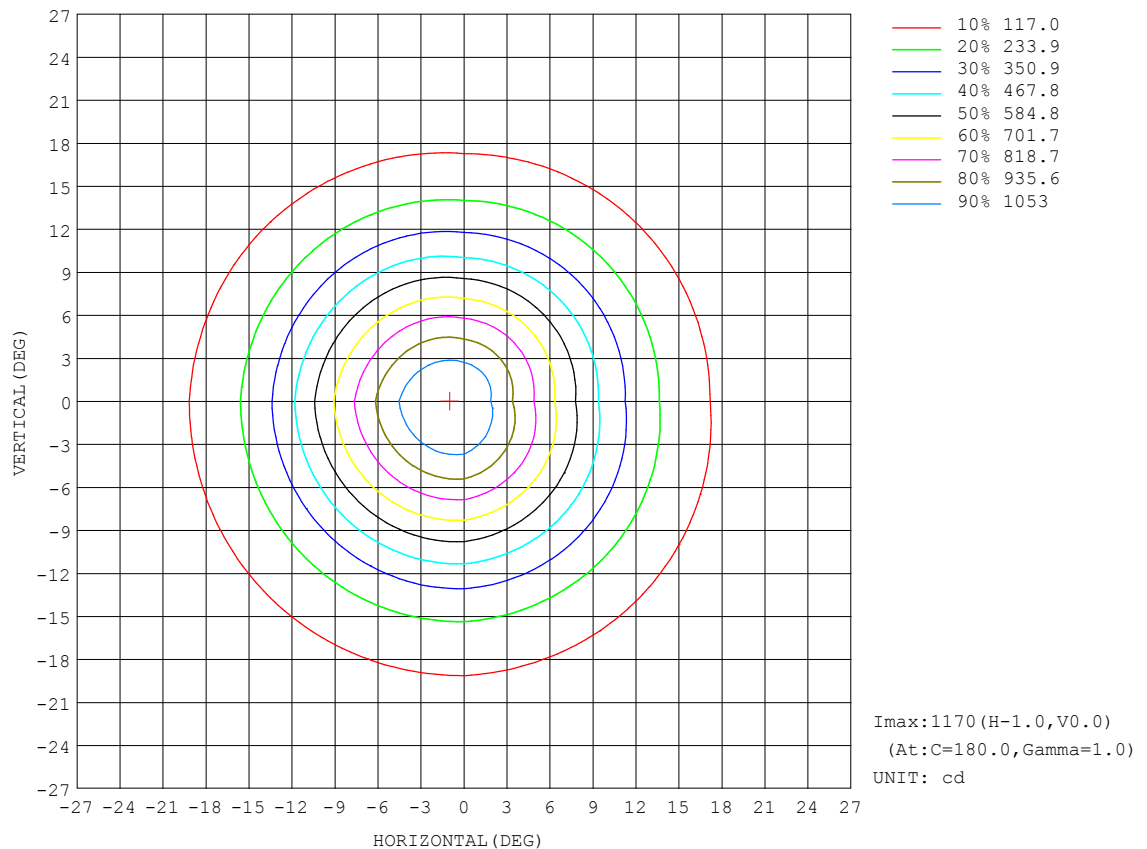


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-07-13

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM


Test:U:12.24V I:0.3370A P:2.750W PF:0.6667 Freq:59.99Hz Lamp Flux:167.226x1 lm		
NAME: LED LANDSCAPE LAMP	TYPE:Nano Knuckle 3W 2700K	WEIGHT:
SPEC.:15°lens	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:

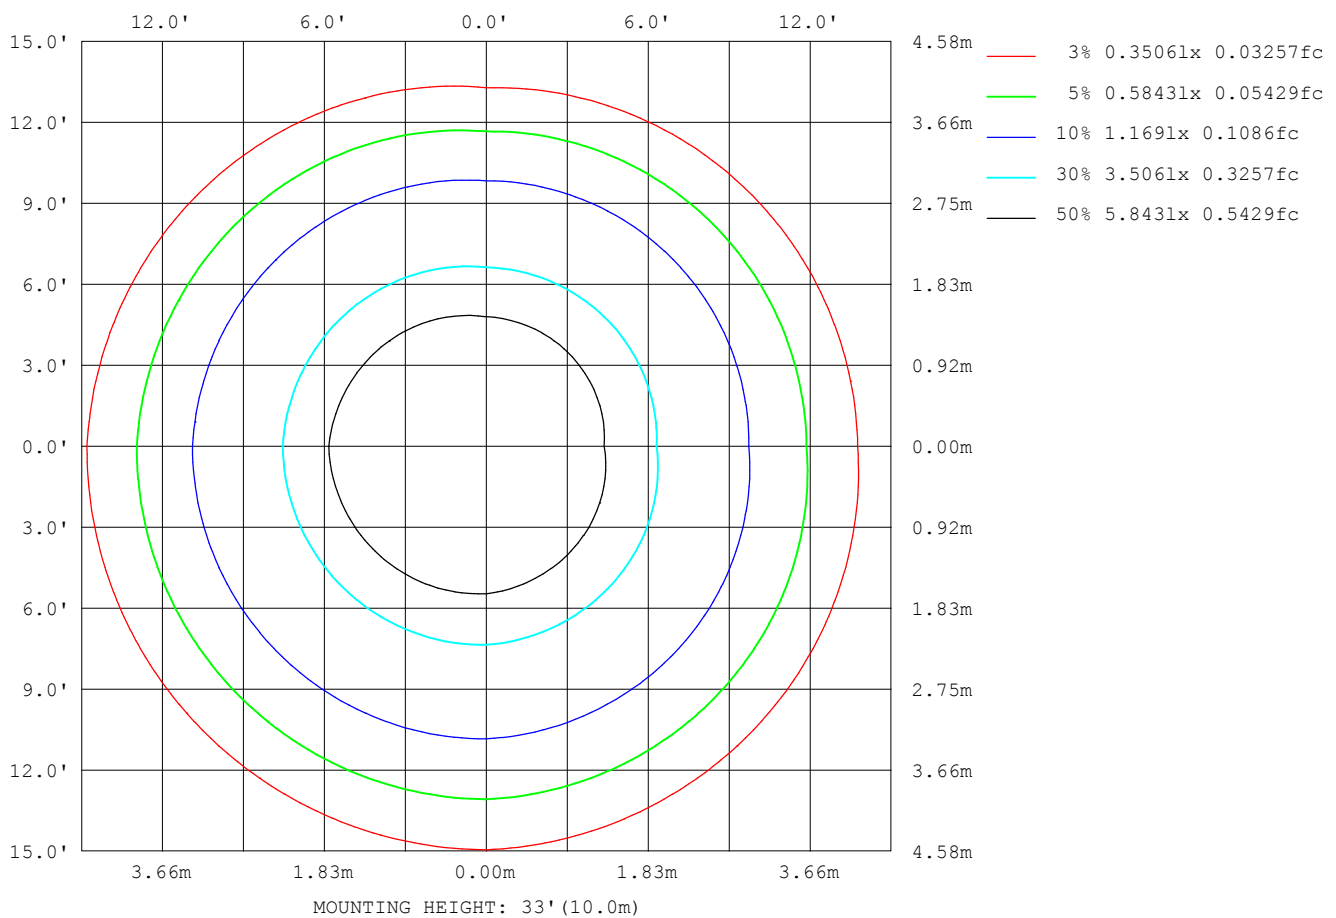

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-07-13

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

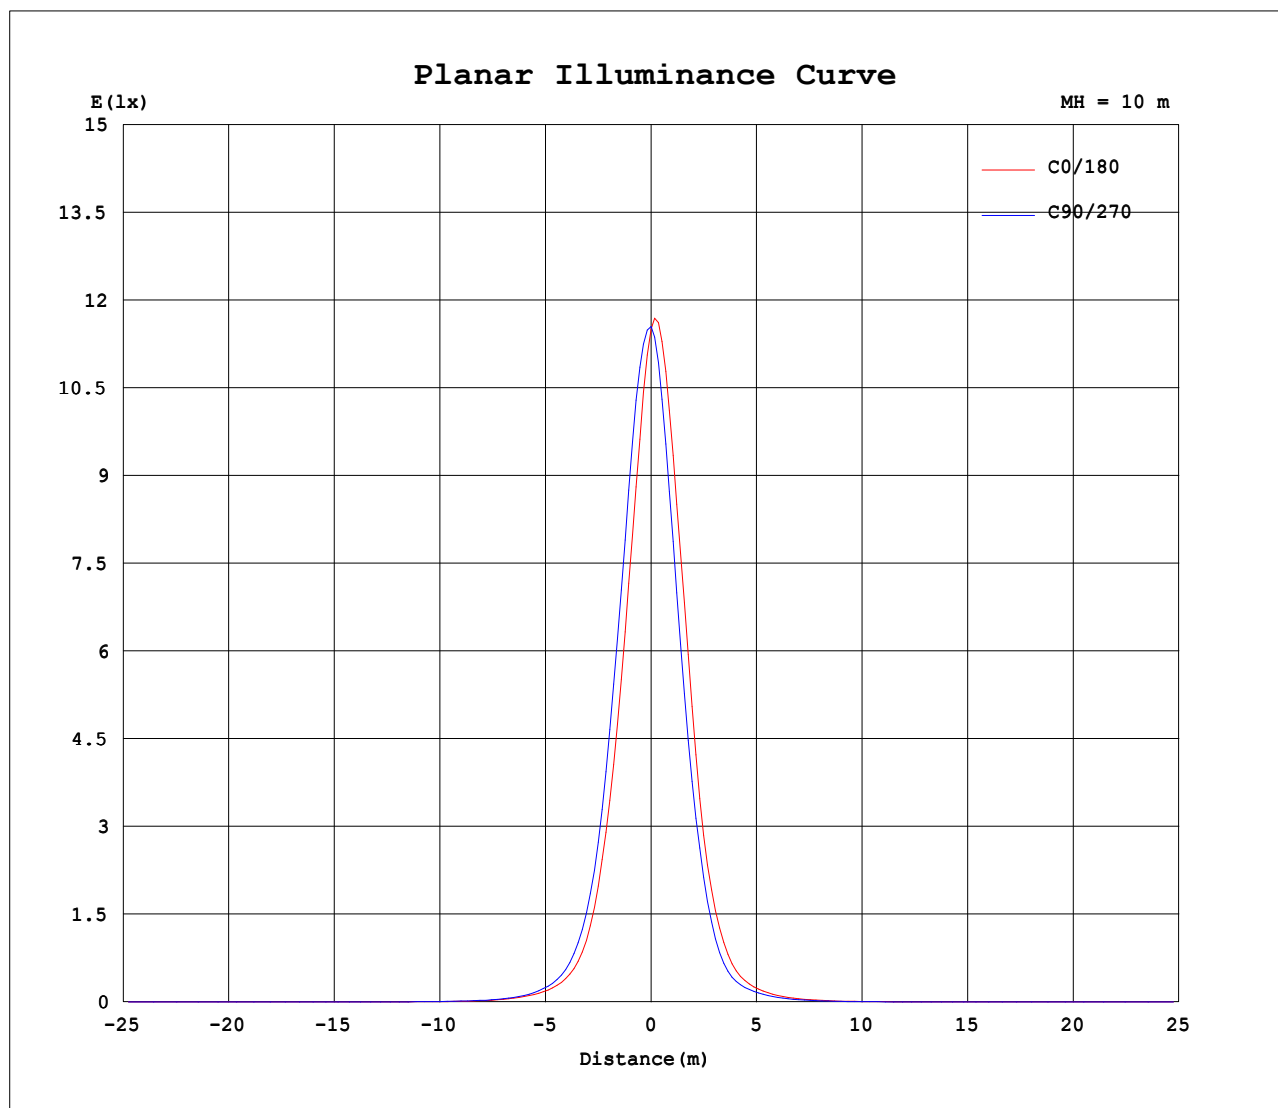


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-07-13

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

### AAI Figure

Test:U:12.24V I:0.3370A P:2.750W PF:0.6667 Freq:59.99Hz Lamp Flux:167.226x1 lm		
NAME: LED LANDSCAPE LAMP	TYPE:Nano Knuckle 3W 2700K	WEIGHT:
SPEC.:15°lens	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:

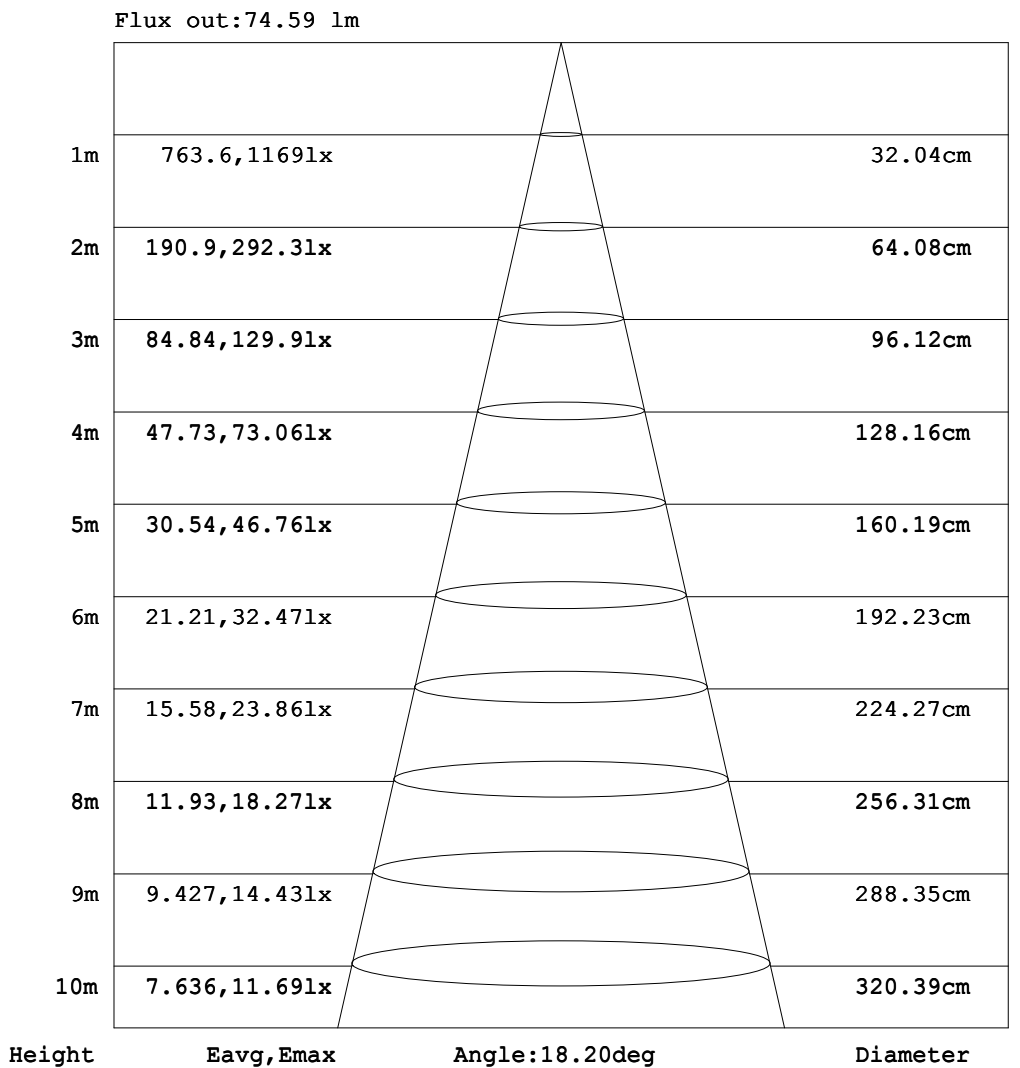

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-07-13

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.24V I:0.3370A P:2.750W PF:0.6667 Freq:59.99Hz Lamp Flux:167.226x1 lm		
NAME: LED LANDSCAPE LAMP	TYPE:Nano Knuckle 3W 2700K	WEIGHT:
SPEC.:15°lens	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.53	1.10	1.72	2.18	2.35	2.35	2.42
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.17	0.53	1.07	1.65	2.11	2.38	2.47
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.32	0.70	1.16	1.60	1.94	2.17
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.23	0.47	0.75	1.01	1.23	1.37
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.10	0.17	0.24	0.28
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.05	0.10	0.13	0.15	0.19	0.22	0.23
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.11	0.21	0.34	0.54	0.79	1.06	1.31	1.50	1.62	1.67
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.22	0.43	0.84	1.37	1.94	2.52	3.11	3.86	4.55	5.02	5.18
-30	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.25	0.54	1.18	1.91	2.82	4.25	6.49	9.48	13.1	17.0	19.9	21.0
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.42	1.04	1.90	3.05	5.34	9.58	16.7	27.9	43.8	66.1	89.7	99.9
-10	0.00	0.00	0.00	0.00	0.01	0.02	0.24	0.61	1.41	2.53	4.38	8.75	17.0	32.3	64.9	147	301	492	569
0	0.00	0.00	0.00	0.00	0.01	0.04	0.27	0.70	1.54	2.73	5.05	10.4	21.0	41.5	98.3	260	622	1023	1151
10	0.00	0.00	0.00	0.00	0.01	0.02	0.24	0.61	1.37	2.47	4.20	8.39	16.1	29.9	58.0	130	269	428	469
20	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.42	1.00	1.81	2.87	4.89	8.69	14.7	23.6	35.3	49.1	61.9	63.8
30	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.25	0.52	1.10	1.75	2.57	3.66	5.57	7.92	10.6	13.1	14.8	14.8
40	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.24	0.41	0.76	1.21	1.69	2.21	2.63	3.04	3.43	3.69	3.70	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.13	0.23	0.35	0.48	0.68	0.89	1.07	1.19	1.26	1.27
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.03	0.09	0.13	0.17	0.20	0.22	0.24	0.24
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.16	0.32	0.49	0.62	0.68
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.43	0.82	1.24	1.56	1.78	1.86
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.41	0.91	1.50	1.97	2.25	2.38	2.39
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.53	1.10	1.72	2.18	2.35	2.35	2.42

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-07-13

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.24V I:0.3370A P:2.750W PF:0.6667 Freq:59.99Hz Lamp Flux:167.226x1 lm		
NAME: LED LANDSCAPE LAMP	TYPE:Nano Knuckle 3W 2700K	WEIGHT:
SPEC.:15°lens	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.41	2.53	2.53	2.43	2.08	1.57	0.94	0.40	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	2.53	2.54	2.45	2.22	1.86	1.36	0.76	0.28	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	2.29	2.18	2.00	1.70	1.29	0.81	0.39	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	1.35	1.23	1.04	0.77	0.48	0.23	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.27	0.22	0.15	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.21	0.18	0.13	0.12	0.09	0.04	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	1.61	1.48	1.27	1.01	0.73	0.47	0.29	0.17	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	4.96	4.46	3.77	3.04	2.45	1.89	1.30	0.73	0.34	0.17	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	19.5	16.4	12.4	8.75	5.90	3.98	2.71	1.84	1.02	0.42	0.18	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
-20	85.8	61.3	39.8	25.0	14.9	8.38	4.72	2.89	1.82	0.89	0.31	0.11	0.01	0.00	0.00	0.00	0.00	0.00	
-10	443	253	117	53.7	27.4	14.5	7.31	3.91	2.37	1.28	0.46	0.16	0.02	0.00	0.00	0.00	0.00	0.00	
0	808	425	179	68.8	32.5	17.0	8.55	4.26	2.55	1.38	0.51	0.18	0.03	0.00	0.00	0.00	0.00	0.00	
10	379	221	100	46.8	25.0	13.6	6.95	3.73	2.32	1.24	0.45	0.16	0.03	0.00	0.00	0.00	0.00	0.00	
20	58.0	44.4	31.3	20.8	13.0	7.50	4.28	2.71	1.72	0.85	0.30	0.11	0.01	0.00	0.00	0.00	0.00	0.00	
30	14.3	12.5	9.89	7.19	4.98	3.40	2.45	1.68	0.94	0.40	0.18	0.06	0.00	0.00	0.00	0.00	0.00	0.00	
40	3.63	3.33	2.95	2.56	2.14	1.64	1.14	0.65	0.33	0.18	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	1.25	1.17	1.03	0.83	0.62	0.42	0.29	0.19	0.10	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.23	0.21	0.19	0.16	0.11	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.03	0.05	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.73	0.70	0.61	0.46	0.28	0.15	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	1.90	1.80	1.65	1.37	1.02	0.64	0.31	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	2.44	2.40	2.31	2.07	1.70	1.23	0.69	0.26	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	2.41	2.53	2.53	2.43	2.08	1.57	0.94	0.40	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-07-13

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks: