




Together, we are brighter.

D5A2-15W-27K-BK

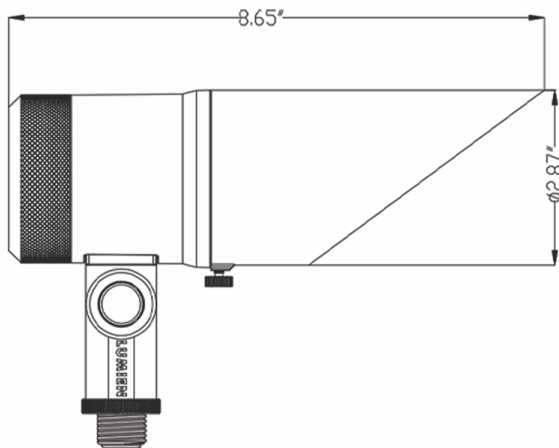

PROJECT: _____

TYPE: _____

CAT #: _____


DESCRIPTION

Directional, Integrated Variable - Standard Dimming, Aluminum - Black, Deco Aluminum Series Downlight (Includes 40° Optic & Hex Louver), 15W, 1000 Lm, 2700K, 10-15V

SPECIFICATIONS

Construction	Aluminum
Finish	Black
Lead Wire	30'
Voltage	10-15V
Mounting	No mount included
Light Warranty	10 Years
Housing Warranty	10 Years

FINISHES



Black

NOTES

Lumien Lighting

770-485-9002
orders@lumienlighting.com
www.lumienlighting.com

Lumien Lighting reserves the right to modify product specifications without notification. © 2023 Lumien Enterprise Inc.

	MODULE TYPE (required)	WATTS	COLOR TEMP	BEAM SPREAD	FINISH	ACCESSORIES
D5A2-15W-27K-BK	CORE: D5A2	- <input type="text"/> - <input type="text"/> - <input type="text"/> - <input type="text"/>				
		15W 8W	2700K 3000K	40°	BK BZ	
D5A2-15W-27K-BK	PRO: D7A2	- <input type="text"/> - <input type="text"/> - <input type="text"/> - <input type="text"/>				
		12W	2700-5700K	40°	BK BZ	
D5A2-15W-27K-BK	PRO: D9A2	- <input type="text"/> - <input type="text"/> - <input type="text"/> - <input type="text"/>				
		12W	2700-5700K	40°	BK BZ	
						Accessories - Included Lens (Optional) LAA-022 BK Aluminum, Banded Hex Louver LAP-011 Plastic, Macro, 40° Optic Lens Accessories - Lens (Optional) LAG-005 Glass, Mercury Vapor Lens for Deco LAP-010 Plastic, Macro, 15° Optic Lens LAP-012 Plastic, Macro, 60° Optic Lens LAP-013 Plastic, Macro/Deco, 80° Optic Lens LAP-016 Plastic, Macro/Deco, Asymmetrical Additional Mounts - Surface Mount (Required) LAA-001 BZ Aluminum, 1/2" Threaded Base LAA-001-BK BK Aluminum, 1/2" Threaded Base LAA-002 BZ Aluminum, 1/2" Threaded J-Box LAA-002-BK BK Aluminum, 1/2" Threaded J-Box Additional Mounts - Tree-Mount (Required) LAA-025 BZ Aluminum, Single-Point Tree Mount LAA-025-BK BK Aluminum, Single-Point Tree Mount Accessories - Pro Series (Optional) LP-REMOTE LumienPRO Remote

	CORE	CORE	PRO	PRO
	D5A2-8W-27K-BK D5A2-8W-27K-BZ D5A2-8W-30K-BK D5A2-8W-30K-BZ	D5A2-15W-27K-BK D5A2-15W-27K-BZ D5A2-15W-30K-BK D5A2-15W-30K-BZ	D7A2-12W-BK D7A2-12W-BZ	D9A2-12W-BK D9A2-12W-BZ
Construction	Aluminum	Aluminum	Aluminum	Aluminum
Finish	Black, Bronze	Bronze, Black	Black, Bronze	Black, Bronze
Input Voltage	10-15V	10-15V	10-15V	10-15V
Wattage (Volt Amps)	8W (8.79)	15W (16.12)	12W (17.18)	12W (17.28)
Module Lumens	600 Lm	1000 Lm	620-729 Lm	27K-57K: 395-526 Lm, R:
Color Temperature	2700K, 3000K	2700K, 3000K	2700-5700K	2700-5700K
Beam Spread	40°	40°	40°	40°
Lead Wire Length	30'	30'	30'	30'
CRI	80+	80+	80+	80+
RGB	No	No	No	Yes
Dimmable	Primary Dimming	Primary Dimming	With LumienPRO Remote	With LumienPRO Remote
Rated Life	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Warranty	10 Years	10 Years	10 Years	10 Years
Core Drill Size	-	-	-	-


Accessories - Included Lens

LAA-022

Accessory, Aluminum -
Black, Banded Hex Louver
(Compatible with Deco
Aluminum & Brass Series)


LAP-011

Accessory, Plastic, Macro,
40° Optic Lens

Accessories - Lens

LAG-005

Accessory, Glass, Mercury
Vapor Lens for Deco
Aluminum Series


LAP-010


Accessory, Plastic, Macro,
15° Optic Lens


LAP-012

Accessory, Plastic, Macro,
60° Optic Lens


LAP-013

Accessory, Plastic, Macro,
80° Optic Lens (Compatible
with the Deco Aluminum
Series)


LAP-016

Accessory, Plastic, Macro,
Asymmetrical Optic Lens
(Compatible with the Deco
Aluminum & Brass Series)

Additional Mounts - Surface Mount

LAA-001

Accessory, Aluminum -
Bronze, 1/2" Threaded Base


LAA-001-BK

Accessory, Aluminum -
Black, 1/2" Threaded Base


LAA-002

Accessory, Aluminum -
Bronze, 1/2" Threaded
Junction Box


LAA-002-BK

Accessory, Aluminum -
Black, 1/2" Threaded
Junction Box

Additional Mounts - Tree-Mount**LAA-025**

Accessory, Aluminum -
Bronze, Single-Point Tree
Mount

**LAA-025-BK**

Accessory, Aluminum -
Black, Single-Point Tree
Mount

Accessories - Pro Series**LP-REMOTE**

LumienPRO Remote
(Functionality determined
by the Light Fixture)