

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	649.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	103.0V x 102.1H
	At 50% of Imax	78.8V x 78.7H
	At 90% of Imax	70.6V x 70.8H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	936.5 lumens per klm.
	To 50% of Imax	813.7 lumens per klm.
	To 90% of Imax	669.2 lumens per klm.

Upward LOR	1.2 %
Downward LOR	98.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-12-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.03V I:1.003A P:8.637W PF:0.7152 Freq:59.99Hz Lamp Flux:815.672x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light	WEIGHT:
SPEC.:10W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

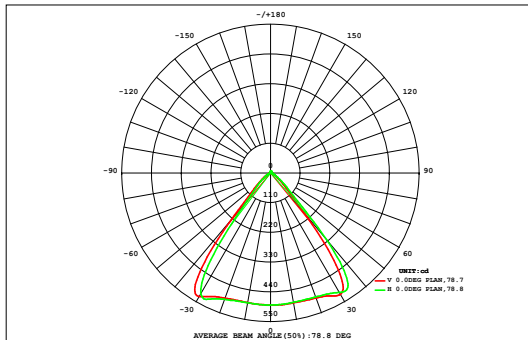

DATA OF LAMP		Eff:94.44lm/W	
MODEL	W3A2-10W-30K-BZ	Imax(cd)	529.7
NOMINAL POWER(W)	10	AVAILABILITY(%)	93.5
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	762.7
NOMINAL FLUX(lm)	815.672	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	815.7
TEST VOLTAGE(V)	12	θ @50%(H,V)	79,79DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
90	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.10	0.11	0.11	0.10	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.71	0.00
80	0.00	0.00	0.01	0.04	0.10	0.19	0.29	0.39	0.45	0.45	0.39	0.29	0.19	0.10	0.04	0.01	0.00	0.00	2.95	0.00
70	0.00	0.00	0.03	0.11	0.25	0.47	0.76	1.07	1.30	1.29	1.07	0.75	0.46	0.24	0.10	0.03	0.00	0.00	7.94	1.20
60	0.00	0.01	0.06	0.20	0.48	1.01	1.84	2.99	4.21	4.19	2.96	1.81	0.99	0.47	0.19	0.05	0.01	0.00	21.5	17.7
50	0.00	0.01	0.09	0.31	0.84	2.07	5.73	11.2	13.9	13.8	11.0	5.51	2.01	0.82	0.30	0.08	0.01	0.00	67.7	65.2
40	0.00	0.02	0.12	0.43	1.33	4.89	12.7	15.0	15.1	15.1	14.9	12.3	4.60	1.28	0.41	0.11	0.02	0.00	98.2	96.4
30	0.00	0.02	0.14	0.54	1.89	8.84	14.2	14.5	14.8	14.8	14.5	14.0	8.26	1.80	0.52	0.13	0.02	0.00	109	107
20	0.00	0.02	0.15	0.60	2.34	10.7	14.0	14.3	14.8	14.8	14.4	13.9	10.1	2.16	0.58	0.15	0.02	0.00	113	111
10	0.00	0.02	0.15	0.59	2.25	10.5	14.0	14.4	14.8	14.8	14.4	14.0	9.82	2.08	0.57	0.14	0.02	0.00	112	111
0	0.00	0.02	0.14	0.51	1.73	7.96	14.1	14.7	14.9	14.9	14.6	14.0	7.38	1.64	0.49	0.13	0.02	0.00	107	106
-10	0.00	0.02	0.11	0.39	1.18	3.86	11.1	14.9	15.6	15.5	14.8	10.7	3.57	1.14	0.38	0.10	0.01	0.00	93.5	91.6
-20	0.00	0.01	0.08	0.27	0.72	1.67	3.90	7.89	10.4	10.3	7.65	3.68	1.62	0.70	0.26	0.08	0.01	0.00	49.2	46.5
-30	0.00	0.01	0.05	0.17	0.40	0.81	1.39	2.01	2.40	2.38	1.98	1.36	0.79	0.39	0.16	0.05	0.01	0.00	14.3	8.96
-40	0.00	0.00	0.02	0.09	0.20	0.37	0.57	0.75	0.86	0.86	0.75	0.56	0.36	0.19	0.08	0.02	0.00	0.00	5.68	0.00
-50	0.00	0.00	0.01	0.03	0.08	0.14	0.21	0.26	0.29	0.29	0.26	0.20	0.13	0.07	0.03	0.01	0.00	0.00	2.02	0.00
-60	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.06	0.06	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.37	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.00	0.16	1.17	4.30	13.8	53.5	94.9	115	124	124	114	93.1	50.3	13.1	4.12	1.10	0.15	0.00	806	---
Φ a	0.00	0.00	0.00	0.05	9.87	50.3	91.9	112	121	121	111	90.1	47.1	9.03	0.00	0.00	0.00	0.00	---	763

one-half-peak spread: U:9.4,D:9.5 , L:8.7,R:9.1


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-12-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.03V I:1.003A P:8.637W PF:0.7152 Freq:59.99Hz Lamp Flux:815.672x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light	WEIGHT:
SPEC.:10W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

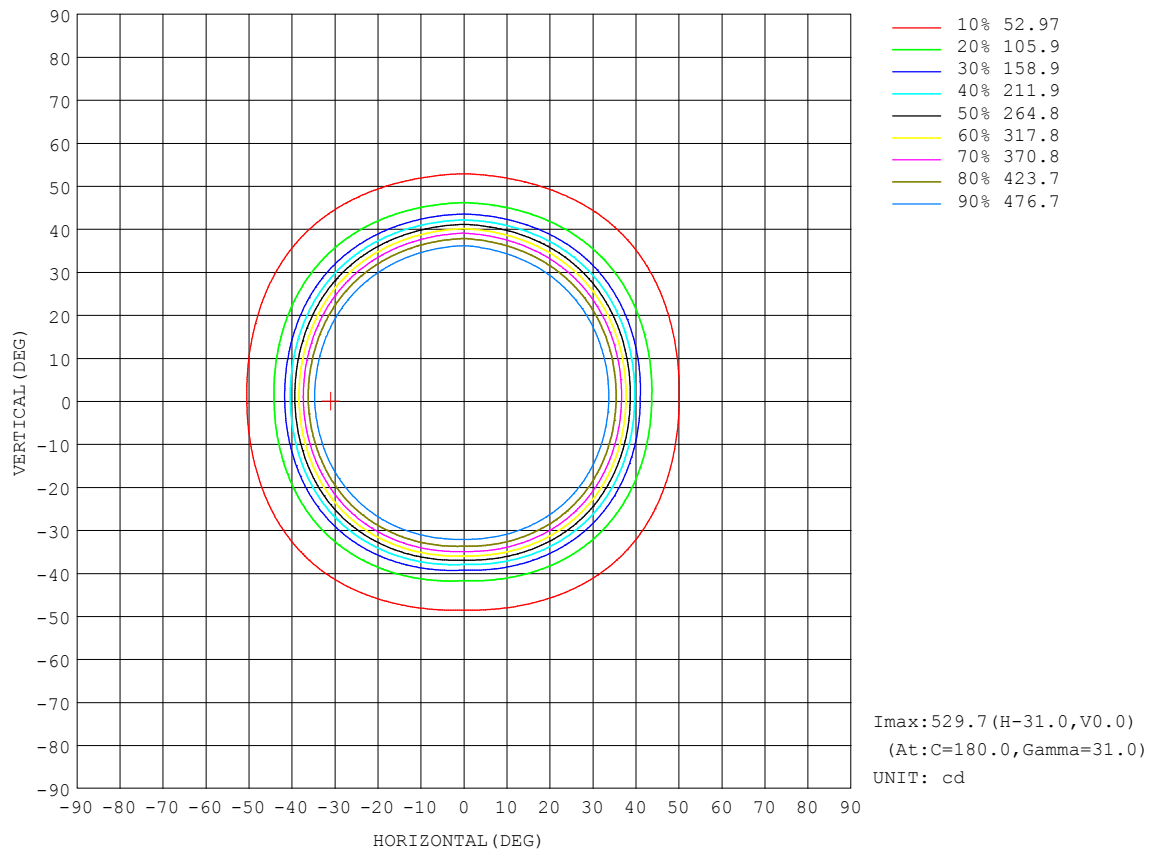


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-12-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.03V I:1.003A P:8.637W PF:0.7152 Freq:59.99Hz Lamp Flux:815.672x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light	WEIGHT:
SPEC.:10W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

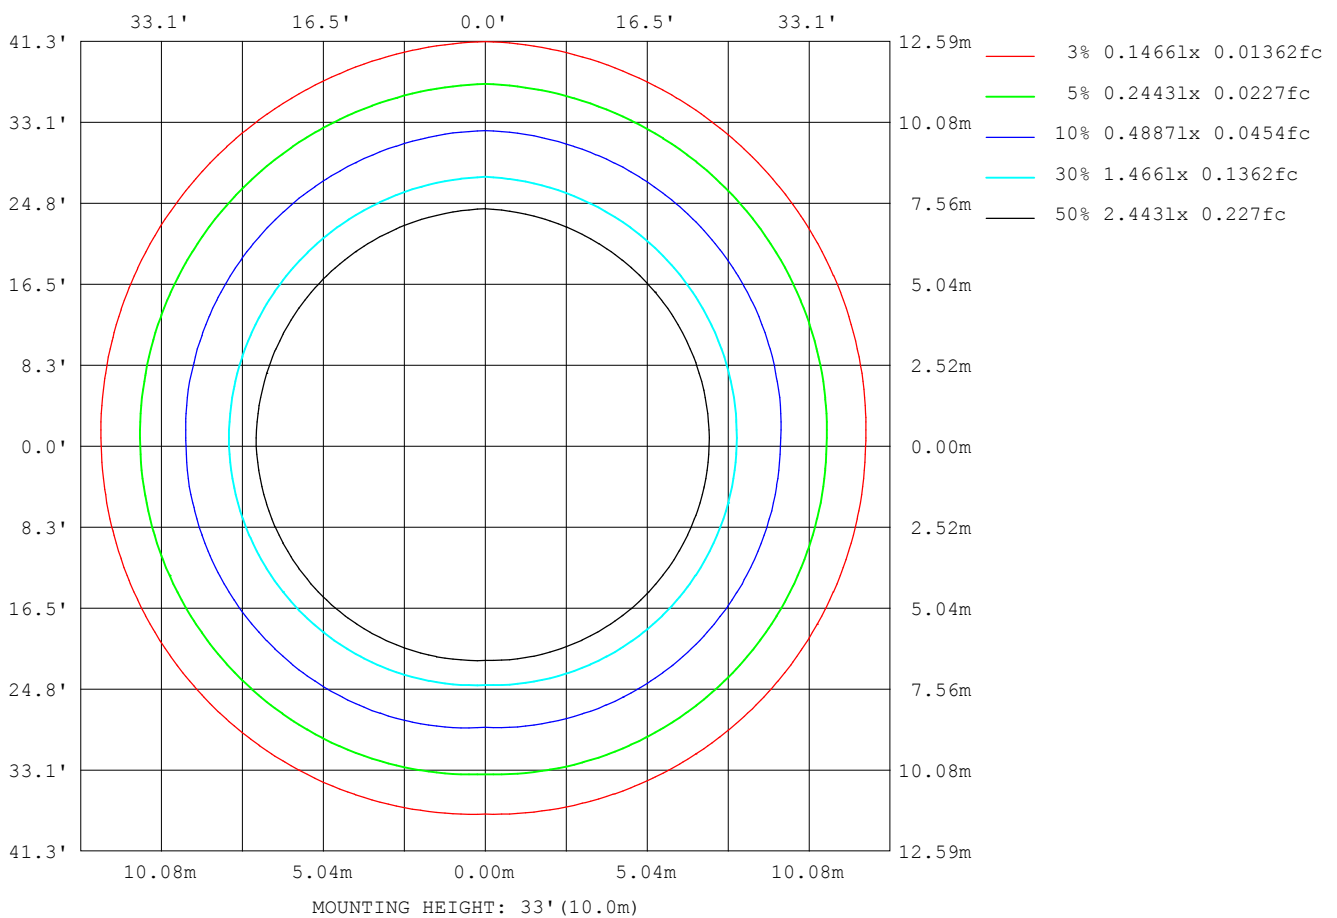

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-12-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

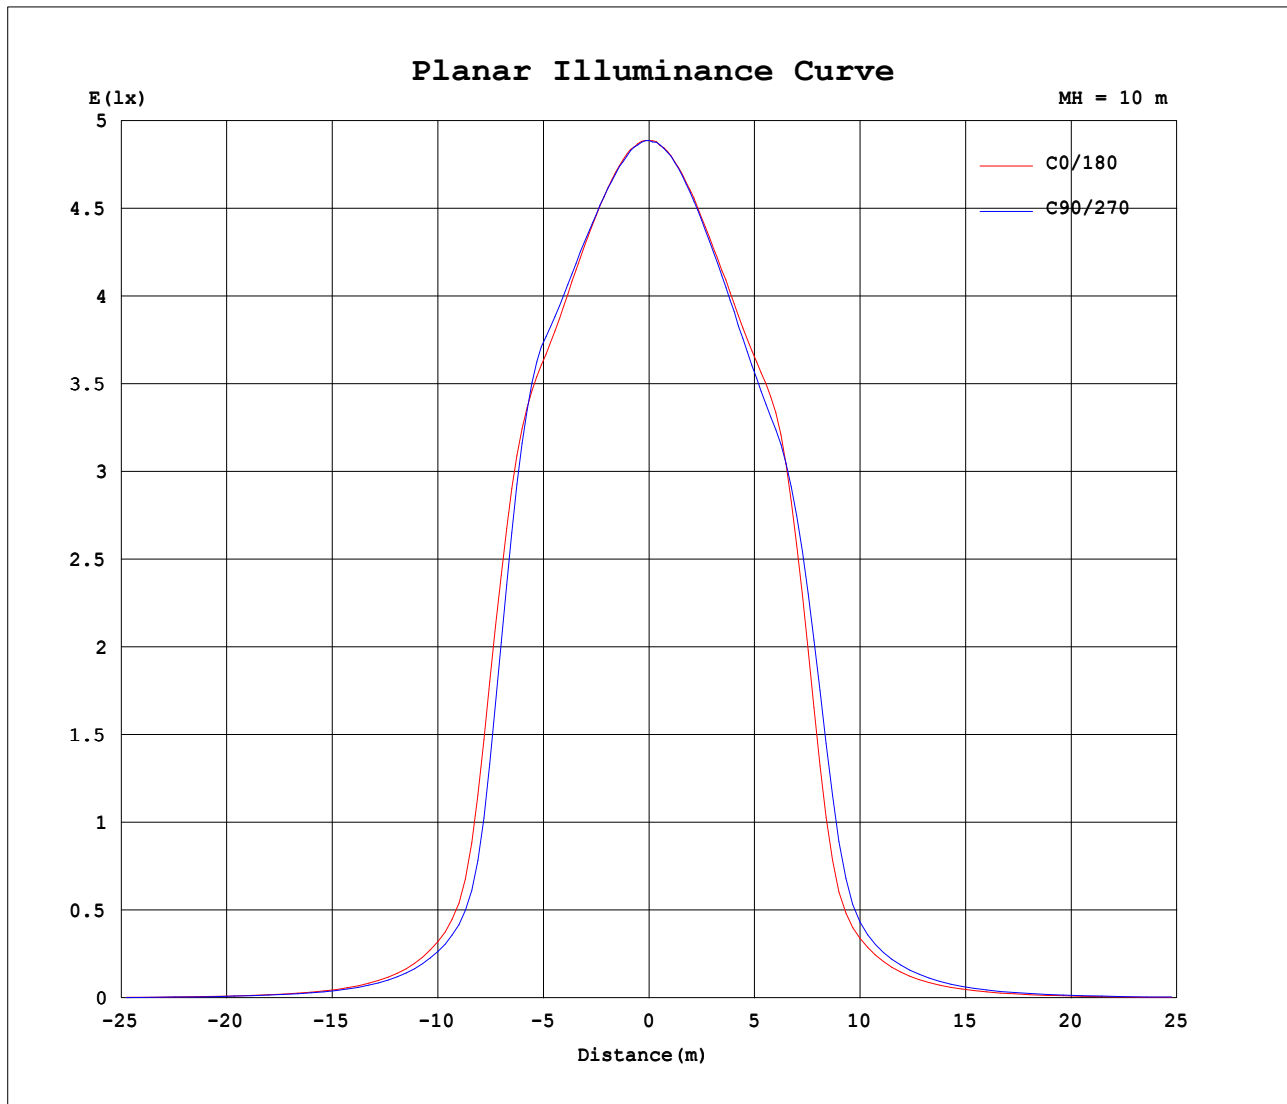


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-12-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.03V I:1.003A P:8.637W PF:0.7152 Freq:59.99Hz Lamp Flux:815.672x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light	WEIGHT:
SPEC.:10W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

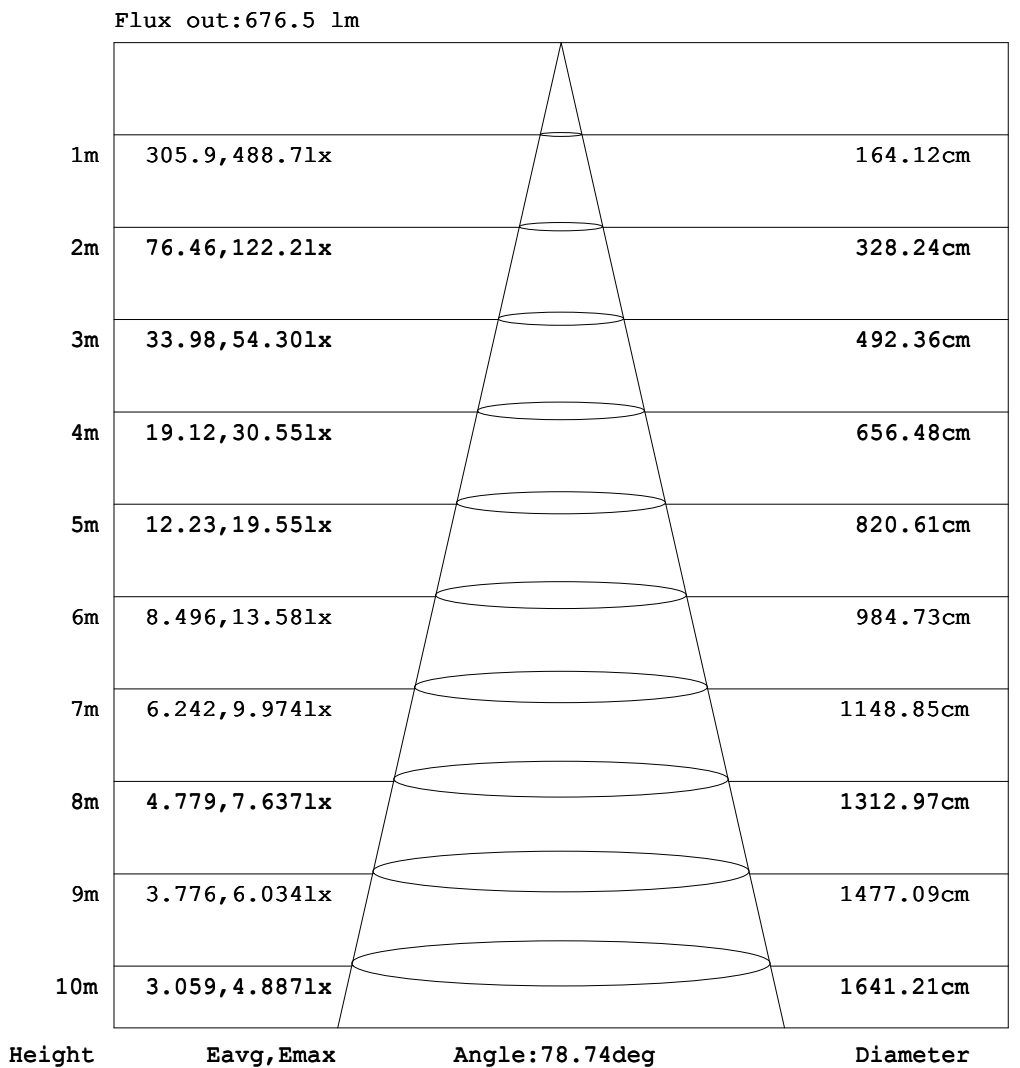

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-12-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.03V I:1.003A P:8.637W PF:0.7152 Freq:59.99Hz Lamp Flux:815.672x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light	WEIGHT:
SPEC.:10W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.05	0.36	0.88	1.49	2.11	2.65	3.14	3.59	4.03	4.65	5.42	6.04	6.49	6.67
-170	0.00	0.00	0.00	0.00	0.01	0.07	0.39	0.90	1.51	2.14	2.71	3.20	3.67	4.12	4.64	5.30	5.91	6.28	6.50
-160	0.00	0.00	0.00	0.00	0.02	0.07	0.33	0.79	1.34	1.95	2.53	3.03	3.50	3.91	4.31	4.68	5.07	5.42	5.65
-150	0.00	0.00	0.00	0.00	0.02	0.07	0.22	0.56	1.03	1.56	2.09	2.60	3.05	3.45	3.81	4.12	4.38	4.60	4.76
-140	0.00	0.00	0.00	0.00	0.01	0.05	0.13	0.31	0.63	1.03	1.46	1.90	2.32	2.70	3.03	3.31	3.54	3.72	3.86
-130	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.15	0.29	0.52	0.78	1.09	1.39	1.68	1.95	2.19	2.39	2.55	2.66
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.10	0.18	0.28	0.41	0.57	0.73	0.89	1.04	1.17	1.28	1.36
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.08	0.11	0.15	0.20	0.25	0.29	0.33	0.35
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.07	0.08	0.12	0.14	0.15	0.15	0.14
-70	0.00	0.00	0.00	0.00	0.00	0.10	0.32	0.66	1.08	1.55	2.07	2.61	3.12	3.60	4.03	4.36	4.59	4.70	4.69
-60	0.00	0.00	0.00	0.03	0.35	1.00	1.92	3.08	4.45	5.97	7.58	9.23	10.9	12.4	13.8	15.0	15.9	16.3	16.4
-50	0.00	0.00	0.00	0.32	1.23	2.67	4.60	7.00	9.83	13.1	17.0	21.3	26.1	31.2	36.2	40.6	43.8	45.6	45.7
-40	0.00	0.00	0.05	0.81	2.41	4.80	8.00	12.1	17.4	24.4	33.6	45.4	59.5	75.3	91.5	110	127	139	136
-30	0.00	0.00	0.18	1.38	3.68	7.07	11.7	18.2	27.6	41.7	61.9	89.7	142	257	385	463	499	513	516
-20	0.00	0.00	0.31	1.90	4.82	9.13	15.3	24.7	39.9	64.2	102	218	413	512	522	509	501	498	497
-10	0.00	0.00	0.40	2.28	5.62	10.6	18.1	30.2	50.9	85.6	174	405	521	514	499	492	488	488	487
0	0.00	0.00	0.44	2.42	5.94	11.2	19.2	32.6	55.8	96.1	229	470	528	504	493	487	487	488	489
10	0.00	0.00	0.42	2.33	5.76	10.9	18.6	31.3	53.1	90.0	193	432	526	509	495	489	486	486	486
20	0.00	0.00	0.34	2.00	5.06	9.60	16.2	26.5	43.3	70.4	117	273	464	523	510	498	493	489	488
30	0.00	0.00	0.21	1.51	3.98	7.65	12.7	20.0	31.0	47.6	72.0	109	205	365	474	514	518	513	510
40	0.00	0.00	0.07	0.94	2.71	5.38	8.99	13.7	20.1	28.7	40.5	56.0	75.3	98.8	133	189	253	301	322
50	0.00	0.00	0.01	0.42	1.48	3.15	5.42	8.26	11.7	15.9	21.0	27.0	34.0	41.8	49.7	57.4	63.9	68.6	70.9
60	0.00	0.00	0.00	0.07	0.51	1.32	2.48	3.94	5.68	7.64	9.80	12.1	14.5	16.9	19.3	21.5	23.3	24.6	25.3
70	0.00	0.00	0.00	0.00	0.03	0.22	0.57	1.07	1.69	2.40	3.18	4.00	4.83	5.63	6.38	7.03	7.56	7.94	8.16
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.10	0.20	0.31	0.43	0.55	0.67	0.77	0.85	0.91	0.95
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.11	0.14	0.17	0.19	0.19
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.10	0.24	0.43	0.63	0.79	0.97	1.10	1.20	1.23	1.23
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.27	0.57	0.89	1.24	1.55	1.84	2.07	2.26	2.40	2.45	2.45
150	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.31	0.70	1.15	1.60	2.04	2.42	2.72	2.97	3.18	3.33	3.43	3.45
160	0.00	0.00	0.00	0.00	0.00	0.01	0.20	0.60	1.10	1.65	2.17	2.62	3.02	3.37	3.71	3.99	4.24	4.42	4.45
170	0.00	0.00	0.00	0.00	0.00	0.03	0.32	0.80	1.38	1.99	2.53	2.99	3.42	3.84	4.30	4.89	5.43	5.77	5.85
180	0.00	0.00	0.00	0.00	0.00	0.05	0.36	0.88	1.49	2.11	2.65	3.14	3.59	4.03	4.65	5.42	6.04	6.49	6.63

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-12-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.03V I:1.003A P:8.637W PF:0.7152 Freq:59.99Hz Lamp Flux:815.672x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light	WEIGHT:
SPEC.:10W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	6.61	6.46	6.10	5.41	4.88	4.54	4.08	3.66	3.05	2.42	1.72	1.12	0.59	0.16	0.00	0.00	0.00	0.00	
-170	6.42	6.21	5.74	5.21	4.82	4.45	4.02	3.53	2.96	2.32	1.66	1.08	0.55	0.16	0.00	0.00	0.00	0.00	
-160	5.54	5.32	5.04	4.79	4.49	4.12	3.74	3.24	2.66	2.04	1.46	0.91	0.44	0.14	0.00	0.00	0.00	0.00	
-150	4.71	4.59	4.42	4.19	3.92	3.57	3.17	2.68	2.15	1.63	1.15	0.68	0.32	0.05	0.00	0.00	0.00	0.00	
-140	3.81	3.70	3.55	3.34	3.07	2.74	2.36	1.94	1.54	1.14	0.73	0.40	0.16	0.01	0.00	0.00	0.00	0.00	
-130	2.62	2.52	2.38	2.19	1.97	1.72	1.45	1.17	0.86	0.60	0.35	0.16	0.02	0.00	0.00	0.00	0.00	0.00	
-120	1.33	1.27	1.18	1.06	0.92	0.78	0.62	0.46	0.32	0.18	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.34	0.31	0.27	0.23	0.18	0.12	0.08	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.15	0.15	0.13	0.11	0.07	0.06	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	4.67	4.54	4.28	3.92	3.47	2.98	2.46	1.92	1.41	0.97	0.57	0.27	0.09	0.02	0.00	0.00	0.00	0.00	
-60	16.3	15.8	14.9	13.6	12.2	10.6	8.97	7.30	5.68	4.17	2.83	1.71	0.87	0.30	0.05	0.00	0.00	0.00	
-50	45.5	43.5	40.1	35.7	30.7	25.6	20.8	16.5	12.7	9.44	6.63	4.26	2.39	1.08	0.27	0.01	0.00	0.00	
-40	136	123	106	89.3	73.5	58.0	44.2	32.7	23.6	16.8	11.6	7.56	4.42	2.13	0.69	0.06	0.00	0.00	
-30	511	496	456	372	239	131	86.5	59.8	40.3	26.7	17.5	11.2	6.61	3.31	1.21	0.16	0.00	0.00	
-20	498	501	508	520	502	392	194	97.3	61.6	38.4	23.8	14.6	8.59	4.39	1.64	0.26	0.00	0.00	
-10	488	489	492	497	512	508	377	152	81.5	48.7	29.0	17.3	10.0	5.14	1.98	0.34	0.00	0.00	
0	489	488	489	492	502	518	438	197	91.0	53.3	31.1	18.3	10.5	5.43	2.11	0.37	0.00	0.00	
10	486	487	489	494	507	512	403	172	85.9	50.9	30.1	17.8	10.3	5.28	2.04	0.35	0.00	0.00	
20	489	492	497	509	513	442	250	112	67.8	41.8	25.5	15.5	9.06	4.64	1.75	0.29	0.00	0.00	
30	512	515	506	461	347	193	106	69.9	46.3	30.1	19.4	12.2	7.19	3.61	1.34	0.19	0.00	0.00	
40	298	249	186	131	97.0	73.8	54.8	39.6	28.0	19.5	13.2	8.54	5.00	2.43	0.81	0.09	0.00	0.00	
50	68.4	63.6	57.0	49.2	41.2	33.5	26.5	20.5	15.5	11.3	7.89	5.08	2.88	1.33	0.37	0.02	0.00	0.00	
60	24.5	23.2	21.3	19.1	16.7	14.2	11.8	9.52	7.36	5.40	3.68	2.27	1.19	0.45	0.09	0.00	0.00	0.00	
70	7.91	7.50	6.94	6.27	5.50	4.68	3.85	3.03	2.26	1.58	0.99	0.52	0.22	0.05	0.00	0.00	0.00	0.00	
80	0.91	0.84	0.76	0.66	0.54	0.43	0.31	0.21	0.12	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.01	0.02	0.03	0.03	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.24	0.27	0.28	0.27	0.24	0.24	0.21	0.17	0.13	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	1.30	1.33	1.29	1.21	1.08	0.97	0.79	0.63	0.45	0.33	0.20	0.09	0.00	0.00	0.00	0.00	0.00	0.00	
140	2.53	2.56	2.50	2.38	2.21	1.97	1.70	1.37	1.07	0.78	0.49	0.27	0.11	0.00	0.00	0.00	0.00	0.00	
150	3.53	3.53	3.48	3.35	3.18	2.94	2.61	2.19	1.75	1.31	0.90	0.53	0.25	0.03	0.00	0.00	0.00	0.00	
160	4.54	4.48	4.35	4.19	3.95	3.65	3.34	2.89	2.36	1.80	1.27	0.78	0.38	0.12	0.00	0.00	0.00	0.00	
170	5.92	5.74	5.33	4.87	4.53	4.20	3.80	3.35	2.81	2.19	1.56	1.00	0.51	0.15	0.00	0.00	0.00	0.00	
180	6.61	6.46	6.10	5.41	4.88	4.54	4.08	3.66	3.05	2.42	1.72	1.12	0.59	0.16	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2020-12-08

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: