

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2579.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	55.7V x 51.7H
	At 50% of Imax	33.3V x 32.1H
	At 90% of Imax	17.0V x 14.6H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	855.8 lumens per klm.
	To 50% of Imax	570.9 lumens per klm.
	To 90% of Imax	169.3 lumens per klm.

Upward LOR	1.5 %
Downward LOR	98.6 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.05V I:1.119A P:9.848W PF:0.7300 Freq:59.97Hz Lamp Flux:401.154x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight CW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

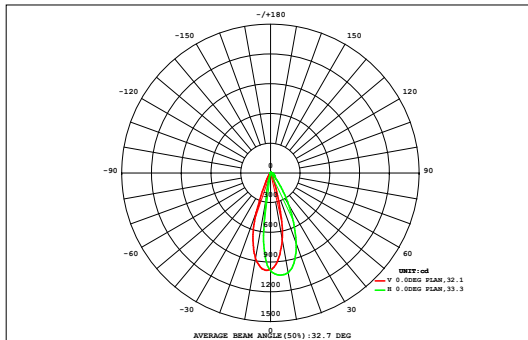

DATA OF LAMP		Eff:40.73lm/W	
MODEL	D7B2-10W-A	Imax (cd)	1035
NOMINAL POWER (W)	10	AVAILABILITY (%)	83.7
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	336.0
NOMINAL FLUX (lm)	401.154	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	401.2
TEST VOLTAGE (V)	12	θ @50% (H,V)	32,33DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.08	0.12	0.16	0.21	0.29	0.37	0.48	0.57	0.66	0.65	0.57	0.47	0.37	0.28	0.21	0.15	0.11	0.08	5.82	0.23
45	0.08	0.12	0.16	0.21	0.29	0.37	0.48	0.57	0.66	0.65	0.57	0.47	0.37	0.28	0.21	0.15	0.11	0.08	5.82	0.23
40	0.09	0.13	0.19	0.28	0.41	0.58	0.79	1.00	1.17	1.16	0.98	0.76	0.56	0.39	0.27	0.18	0.12	0.09	9.14	5.07
35	0.10	0.15	0.24	0.39	0.63	0.95	1.34	1.73	2.05	2.03	1.69	1.29	0.90	0.58	0.36	0.22	0.14	0.09	14.9	12.0
30	0.11	0.18	0.31	0.56	0.95	1.48	2.10	2.73	3.25	3.22	2.65	1.99	1.37	0.86	0.49	0.27	0.16	0.10	22.8	20.5
25	0.11	0.20	0.40	0.75	1.31	2.07	3.01	3.97	4.72	4.63	3.75	2.78	1.87	1.15	0.64	0.33	0.17	0.10	32.0	30.0
20	0.11	0.23	0.48	0.93	1.64	2.73	4.12	5.37	6.20	5.98	4.79	3.48	2.30	1.38	0.76	0.38	0.18	0.09	41.2	39.4
15	0.11	0.24	0.52	1.03	1.93	3.48	5.20	6.45	7.23	6.98	5.67	4.00	2.52	1.47	0.78	0.38	0.17	0.08	48.3	46.6
10	0.10	0.23	0.51	1.03	2.13	4.06	5.81	7.02	7.66	7.43	6.23	4.34	2.47	1.35	0.69	0.32	0.14	0.06	51.6	50.0
5	0.08	0.19	0.43	0.91	2.12	4.21	5.95	7.11	7.61	7.36	6.19	4.26	2.12	1.00	0.48	0.21	0.08	0.04	50.4	48.8
0	0.07	0.16	0.35	0.75	1.82	3.69	5.20	6.24	6.87	6.62	5.32	3.51	1.60	0.70	0.32	0.13	0.05	0.02	43.4	41.7
-5	0.06	0.13	0.29	0.59	1.30	2.64	3.71	4.18	4.25	4.01	3.40	2.24	1.05	0.52	0.25	0.10	0.04	0.02	28.8	26.9
-10	0.05	0.10	0.22	0.42	0.79	1.53	2.20	2.35	1.81	1.56	1.57	1.01	0.57	0.34	0.17	0.07	0.03	0.02	14.8	12.4
-15	0.04	0.07	0.15	0.27	0.45	0.73	1.03	1.00	0.57	0.35	0.42	0.38	0.30	0.19	0.10	0.05	0.02	0.02	6.13	2.35
-20	0.03	0.05	0.09	0.16	0.25	0.34	0.40	0.36	0.15	0.06	0.15	0.17	0.14	0.10	0.05	0.03	0.02	0.01	2.57	0.00
-25	0.02	0.03	0.06	0.09	0.13	0.17	0.18	0.14	0.05	0.02	0.06	0.07	0.06	0.04	0.03	0.02	0.01	0.01	1.19	0.00
-30	0.02	0.02	0.03	0.05	0.07	0.08	0.08	0.06	0.02	0.01	0.02	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.57	0.00
-35	0.01	0.02	0.02	0.02	0.03	0.04	0.03	0.03	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.29	0.00
-40	0.01	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.17	0.00
-45	0.01	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.17	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	1.20	2.28	4.47	8.47	16.3	29.2	41.6	50.3	54.3	52.1	43.5	30.8	18.3	10.4	5.62	2.87	1.48	0.86	374	---
Φ a	0.00	0.00	0.17	5.02	13.8	27.2	40.0	48.9	53.2	51.1	42.2	29.1	16.1	7.48	1.75	0.00	0.00	0.00	---	336

one-half-peak spread: U:13.5,D:17.9 , L:17.0,R:15.3


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.05V I:1.119A P:9.848W PF:0.7300 Freq:59.97Hz Lamp Flux:401.154x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight CW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

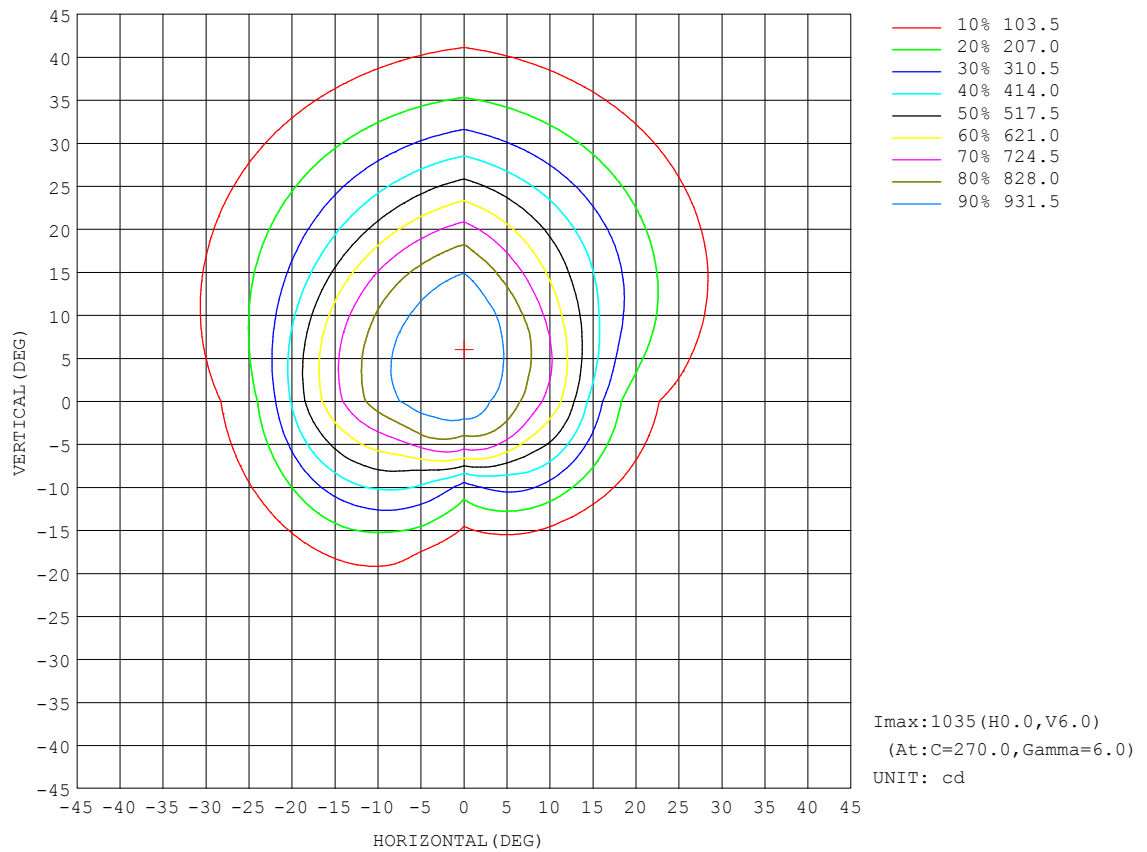


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.05V I:1.119A P:9.848W PF:0.7300 Freq:59.97Hz Lamp Flux:401.154x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight CW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

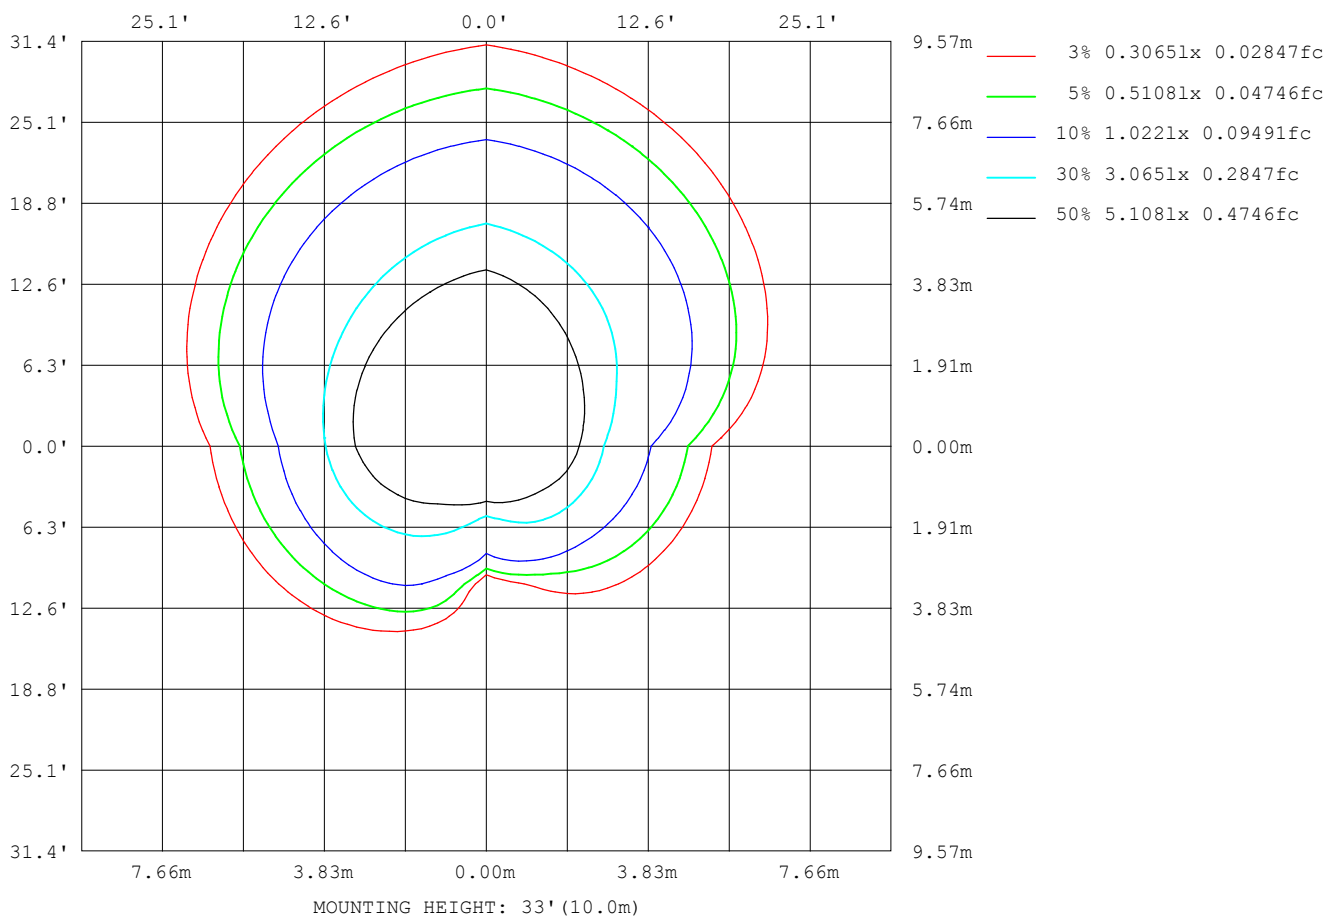

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

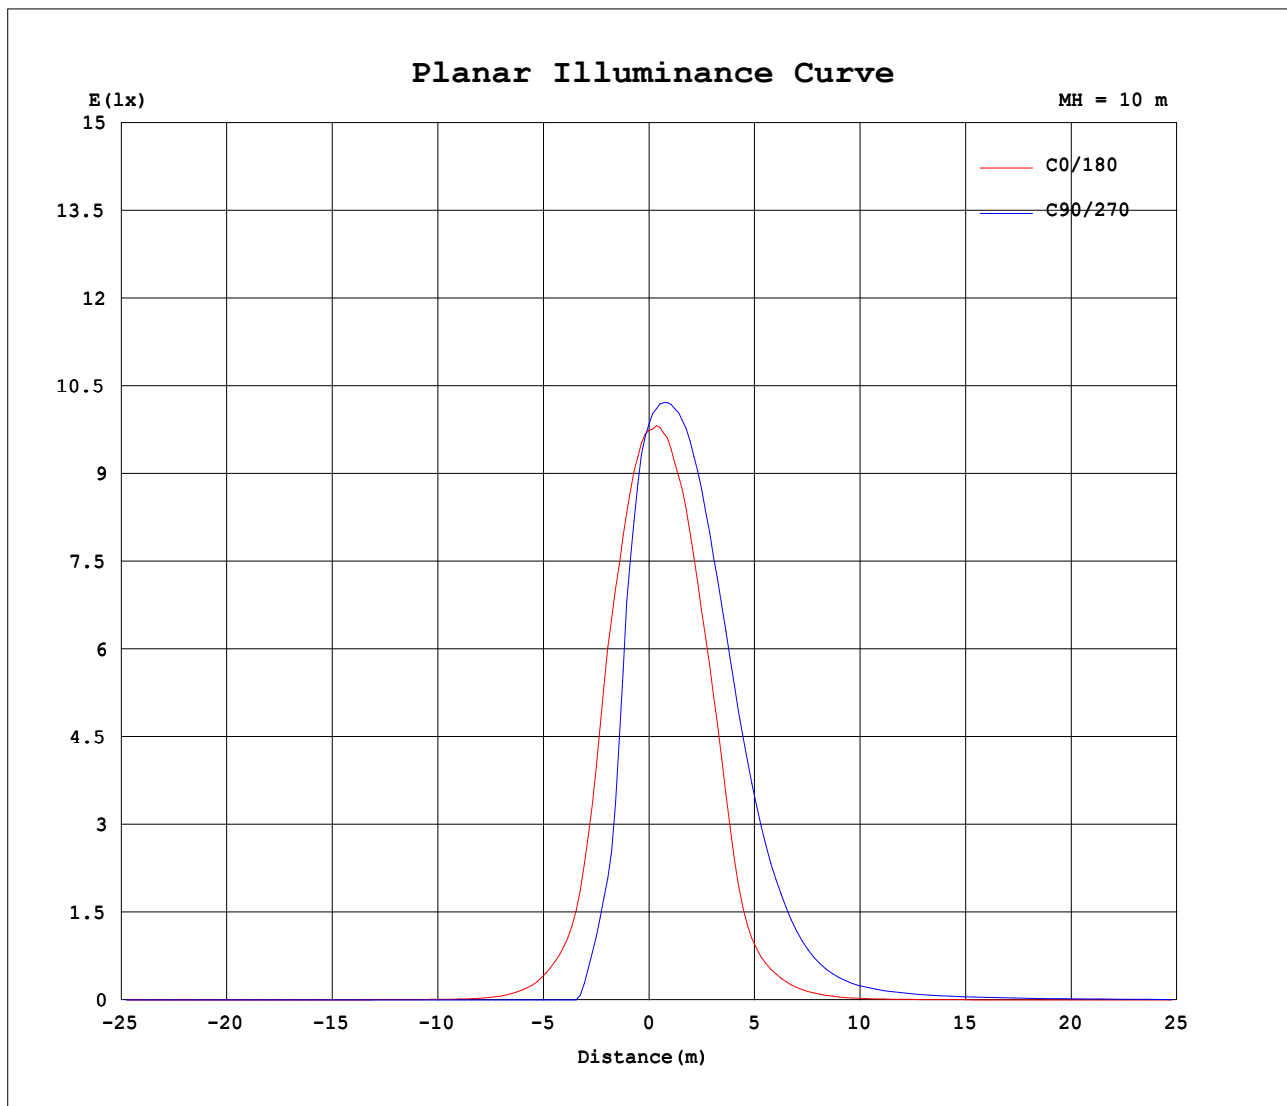


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.05V I:1.119A P:9.848W PF:0.7300 Freq:59.97Hz Lamp Flux:401.154x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight CW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

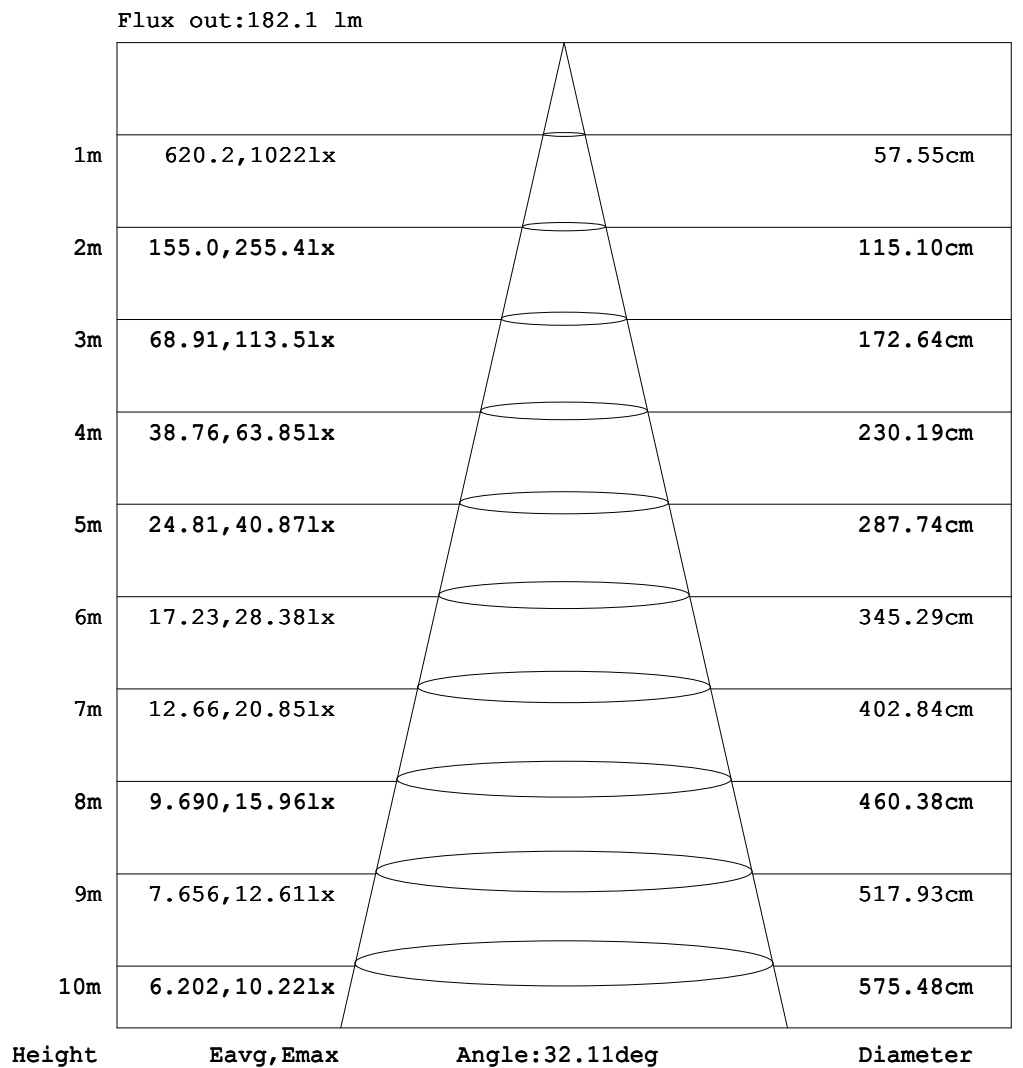

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:1.119A P:9.848W PF:0.7300 Freq:59.97Hz Lamp Flux:401.154x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight CW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.34	0.84	1.51	2.26	2.91	3.34	3.57	3.82	3.80
-170	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.08	0.15	0.26	0.65	1.24	1.97	2.76	3.44	3.89	4.09	4.19	4.42
-160	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.13	0.24	0.42	0.72	1.28	1.97	2.74	3.51	4.15	4.61	4.94	5.32
-150	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.13	0.24	0.42	0.68	1.04	1.58	2.21	2.88	3.55	4.15	4.69	5.14
-140	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.10	0.19	0.31	0.50	0.74	1.06	1.42	1.85	2.32	2.75	3.14	3.46
-130	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.11	0.18	0.28	0.41	0.57	0.76	0.97	1.18	1.39	1.57	1.72
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.12	0.16	0.22	0.29	0.36	0.44	0.51	0.57	0.62
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.08	0.09	0.11	0.12	0.13	0.14
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.00
-70	0.00	0.00	0.00	0.00	0.03	0.10	0.14	0.18	0.22	0.25	0.28	0.28	0.28	0.26	0.22	0.18	0.12	0.06	0.00
-60	0.00	0.00	0.00	0.07	0.16	0.26	0.38	0.48	0.57	0.63	0.70	0.71	0.69	0.65	0.56	0.45	0.32	0.16	0.00
-50	0.00	0.00	0.02	0.17	0.32	0.50	0.70	0.90	1.06	1.21	1.30	1.34	1.34	1.26	1.12	0.91	0.65	0.34	0.00
-40	0.00	0.00	0.10	0.27	0.51	0.79	1.10	1.40	1.69	1.93	2.14	2.32	2.57	2.88	3.14	3.14	2.62	1.50	0.00
-30	0.00	0.00	0.14	0.38	0.70	1.09	1.52	1.98	2.43	2.89	3.63	5.14	7.88	11.4	14.5	16.2	14.4	8.57	0.00
-20	0.00	0.00	0.17	0.47	0.88	1.38	1.95	2.55	3.26	4.39	7.21	13.7	23.9	39.0	55.9	75.7	87.9	62.0	0.00
-10	0.00	0.00	0.20	0.54	0.99	1.60	2.31	3.12	4.12	6.58	13.4	27.6	54.3	98.9	208	351	423	400	267
0	0.00	0.00	0.21	0.58	1.06	1.74	2.55	3.50	4.81	8.27	18.2	39.2	81.5	172	424	690	878	972	974
10	0.00	0.04	0.32	0.88	1.68	2.77	4.08	5.77	8.30	13.6	26.9	56.3	113	207	396	654	838	957	1023
20	0.00	0.07	0.39	1.07	2.13	3.54	5.21	7.31	10.4	15.5	26.1	49.0	92.5	164	264	398	552	680	760
30	0.00	0.10	0.44	1.14	2.33	3.90	5.78	8.01	10.9	15.1	21.7	33.1	53.3	86.6	135	196	260	318	360
40	0.00	0.13	0.44	1.05	2.23	3.77	5.75	7.94	10.4	13.6	17.7	23.2	30.8	41.1	54.6	71.2	89.2	106	117
50	0.00	0.14	0.39	0.92	1.82	3.23	4.92	6.99	9.25	11.7	14.4	17.5	21.1	25.2	29.7	34.6	39.5	43.9	47.4
60	0.00	0.15	0.38	0.77	1.33	2.22	3.58	5.18	6.94	8.93	11.2	13.3	15.6	17.9	20.2	22.4	24.6	26.6	28.4
70	0.00	0.16	0.36	0.62	0.97	1.47	2.03	2.82	3.90	5.18	6.58	8.04	9.50	10.9	12.4	13.8	15.1	16.3	17.3
80	0.00	0.16	0.33	0.53	0.75	1.00	1.28	1.58	1.92	2.31	2.72	3.15	3.60	4.04	4.49	4.92	5.33	5.72	6.07
90	0.00	0.15	0.29	0.44	0.59	0.74	0.88	1.03	1.18	1.33	1.47	1.62	1.77	1.91	2.06	2.21	2.36	2.50	2.65
100	0.00	0.14	0.25	0.36	0.45	0.53	0.61	0.68	0.74	0.80	0.85	0.89	0.94	0.99	1.03	1.07	1.12	1.17	1.24
110	0.00	0.12	0.21	0.29	0.35	0.38	0.40	0.39	0.39	0.37	0.36	0.34	0.31	0.28	0.26	0.25	0.24	0.23	0.24
120	0.00	0.11	0.18	0.23	0.24	0.24	0.22	0.18	0.14	0.10	0.06	0.04	0.02	0.01	0.01	0.00	0.00	0.00	0.00
130	0.00	0.09	0.14	0.17	0.16	0.13	0.09	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.07	0.11	0.11	0.10	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.04	0.03	0.00
150	0.00	0.05	0.08	0.07	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.02	0.13	0.23	0.31	0.34	0.33	0.29	0.17
160	0.00	0.04	0.05	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.05	0.26	0.52	0.78	1.14	1.50	1.74	1.86	1.80
170	0.00	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.22	0.59	1.07	1.67	2.27	2.76	3.08	3.23	3.20
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.34	0.84	1.51	2.26	2.91	3.34	3.57	3.82	3.80

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:1.119A P:9.848W PF:0.7300 Freq:59.97Hz Lamp Flux:401.154x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight CW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.01	4.11	4.29	4.27	3.96	3.34	2.55	1.71	1.04	0.45	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	4.38	4.54	4.62	4.53	4.15	3.45	2.60	1.77	1.08	0.53	0.16	0.04	0.02	0.01	0.00	0.00	0.00	0.00	
-160	5.17	5.07	4.86	4.45	3.83	3.07	2.27	1.52	0.92	0.46	0.13	0.06	0.03	0.01	0.00	0.00	0.00	0.00	
-150	4.89	4.55	4.10	3.55	2.93	2.27	1.66	1.09	0.63	0.27	0.13	0.06	0.03	0.01	0.00	0.00	0.00	0.00	
-140	3.26	2.97	2.62	2.20	1.78	1.35	0.94	0.58	0.31	0.19	0.10	0.05	0.02	0.00	0.00	0.00	0.00	0.00	
-130	1.61	1.45	1.25	1.04	0.81	0.58	0.41	0.28	0.18	0.11	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-120	0.57	0.51	0.44	0.36	0.29	0.22	0.16	0.12	0.08	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.13	0.12	0.11	0.09	0.08	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.02	0.03	0.04	0.05	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.08	0.15	0.21	0.26	0.28	0.28	0.26	0.23	0.18	0.12	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.19	0.37	0.52	0.64	0.70	0.72	0.69	0.62	0.52	0.39	0.27	0.14	0.03	0.00	0.00	0.00	0.00	0.00	
-40	0.46	0.84	1.11	1.28	1.38	1.39	1.33	1.21	1.02	0.80	0.58	0.36	0.17	0.01	0.00	0.00	0.00	0.00	
-30	3.33	5.40	5.65	4.59	3.37	2.59	2.24	1.96	1.66	1.31	0.95	0.61	0.33	0.10	0.00	0.00	0.00	0.00	
-20	22.3	33.4	32.6	23.5	14.6	7.56	4.10	2.94	2.37	1.86	1.35	0.88	0.48	0.18	0.00	0.00	0.00	0.00	
-10	338	275	144	79.0	42.9	20.4	8.51	4.27	3.11	2.35	1.69	1.10	0.60	0.25	0.00	0.00	0.00	0.00	
0	881	683	373	153	74.8	32.2	12.6	5.50	3.65	2.72	1.92	1.24	0.67	0.28	0.00	0.00	0.00	0.00	
10	894	689	446	268	151	78.7	37.2	17.8	10.2	6.53	4.34	2.87	1.77	0.93	0.33	0.12	0.04	0.00	
20	640	497	355	231	139	76.1	39.5	21.8	13.5	8.96	6.11	4.14	2.64	1.44	0.60	0.22	0.07	0.00	
30	313	251	186	125	78.7	48.1	30.2	20.0	13.8	9.80	6.98	4.87	3.14	1.72	0.76	0.30	0.10	0.00	
40	105	87.4	69.1	52.7	39.6	29.6	22.2	16.7	12.7	9.56	7.11	5.00	3.15	1.73	0.78	0.35	0.13	0.00	
50	43.7	39.2	34.2	29.3	24.7	20.5	16.9	13.7	11.0	8.58	6.37	4.36	2.76	1.50	0.75	0.37	0.14	0.00	
60	26.5	24.4	22.2	19.8	17.5	15.2	12.9	10.7	8.48	6.49	4.76	3.21	1.96	1.16	0.69	0.38	0.15	0.00	
70	16.3	15.0	13.7	12.2	10.7	9.26	7.78	6.31	4.92	3.68	2.63	1.89	1.36	0.94	0.62	0.36	0.16	0.00	
80	5.71	5.31	4.89	4.45	4.00	3.54	3.10	2.68	2.28	1.91	1.58	1.28	1.00	0.75	0.53	0.33	0.16	0.00	
90	2.50	2.36	2.21	2.06	1.91	1.77	1.62	1.47	1.33	1.18	1.03	0.88	0.74	0.59	0.44	0.29	0.15	0.00	
100	1.17	1.12	1.07	1.03	0.99	0.94	0.89	0.85	0.80	0.74	0.68	0.61	0.53	0.45	0.36	0.25	0.14	0.00	
110	0.23	0.24	0.25	0.26	0.28	0.31	0.34	0.36	0.37	0.39	0.39	0.40	0.38	0.35	0.29	0.21	0.12	0.00	
120	0.00	0.00	0.00	0.01	0.01	0.02	0.04	0.06	0.10	0.14	0.18	0.22	0.24	0.24	0.23	0.18	0.11	0.00	
130	0.03	0.06	0.07	0.07	0.05	0.02	0.00	0.00	0.01	0.02	0.05	0.09	0.13	0.16	0.17	0.14	0.09	0.00	
140	0.14	0.26	0.35	0.37	0.36	0.29	0.21	0.08	0.00	0.00	0.01	0.03	0.06	0.10	0.11	0.11	0.07	0.00	
150	0.49	0.72	0.89	0.98	0.95	0.82	0.64	0.41	0.21	0.03	0.00	0.01	0.02	0.05	0.07	0.08	0.05	0.00	
160	2.08	2.20	2.22	2.08	1.86	1.61	1.25	0.85	0.50	0.22	0.00	0.00	0.01	0.03	0.04	0.05	0.04	0.00	
170	3.42	3.52	3.50	3.37	3.06	2.54	1.95	1.34	0.82	0.38	0.08	0.00	0.00	0.01	0.02	0.02	0.02	0.00	
180	4.01	4.11	4.29	4.27	3.96	3.34	2.55	1.71	1.04	0.45	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-17

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: