


L3S1-5-10W-27K-WH

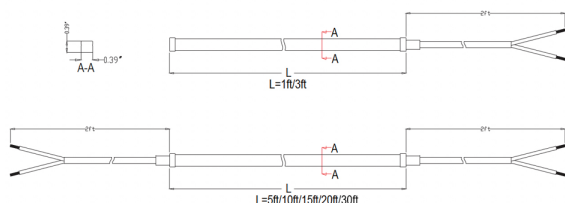

PROJECT: _____

TYPE: _____

CAT #: _____

DESCRIPTION

Linear, Integrated Non-Modular, Silicone-Injected - White, Side-Flex - 5' Section, 10W, 72 Lm/Ft, 2700K, 10-15V

SPECIFICATIONS

Construction	Silicone-Injected
Finish	White
Lead Wire	3'
Voltage	10-15V
Mounting	Ordered Separately
Light Warranty	3 Years

FINISHES

White

NOTES

Lumien Lighting

770-485-9002
orders@lumienlighting.com
www.lumienlighting.com

Lumien Lighting reserves the right to modify product specifications without notification. © 2023 Lumien Enterprise Inc.



ORDERING GUIDE

MODULE TYPE (required)	WATTS	COLOR TEMP	BEAM SPREAD	FINISH	ACCESSORIES
---------------------------	-------	---------------	----------------	--------	-------------

L3S1-5-10W-27K-WH CORE: L3S1

+

-

10W

20W

2W

-

2700K

3000K

-

120°

-

A

WH

+

- Accessories - LumienARC (Optional)**
- LAA-028** BK Aluminum, ARC, Rigid, 1-Sided Glare
 - LAA-027** BK Aluminum, ARC, Rigid, 5ft Channel
 - LAA-029** BK Aluminum, ARC, Flex, 5ft Channel
 - LAA-030** BK Aluminum, ARC, Flex, 1-Sided Glare
 - LAA-041** BK Aluminum, ARC, Corner, Flush
 - LAA-042** BK Aluminum, ARC, Corner, Inner Tall Wall
 - LAA-043** BK Aluminum, ARC, Corner, Outer Tall
 - LAA-044** BK Aluminum, ARC, Channel Connector
 - LAA-045** BK Aluminum, ARC, Channel Under Cap
 - LAS-006** Stainless Steel, ARC Channel Spike

	CORE	CORE	CORE	CORE
	L3S1-1-2W-27K-WH L3S1-1-2W-30K-WH	L3S1-3-6W-27K-WH L3S1-3-6W-30K-WH	L3S1-5-10W-27K-WH L3S1-5-10W-30K-WH	L3S1-10-20W-27K-WH L3S1-10-20W-30K-WH
Construction	Silicone-Injected	Silicone-Injected	Silicone-Injected	Silicone-Injected
Finish	White	White	White	White
Input Voltage	10-15V	10-15V	10-15V	10-15V
Wattage (Volt Amps)	2W (2.1)	6W (6.8)	10W (10.9)	20W (20.64)
Module Lumens	72 Lm / Ft, 76 Lm / Ft	72 Lm / Ft, 76 Lm / Ft	72 Lm / Ft, 76 Lm / Ft	72 Lm / Ft, 76 Lm / Ft
Color Temperature	2700K, 3000K	2700K, 3000K	2700K, 3000K	2700K, 3000K
Beam Spread	120°	120°	120°	120°
Lead Wire Length	3'	3'	3'	3'
CRI	80+	80+	80+	80+
RGB	No	No	No	No
Dimmable	Yes	Yes	Yes	Yes
Rated Life	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Warranty	3 Years	3 Years	3 Years	3 Years
Core Drill Size	-	-	-	-

	CORE	CORE	CORE
	L3S1-15-30W-27K-WH L3S1-15-30W-30K-WH	L3S1-20-40W-27K-WH L3S1-20-40W-30K-WH	L3S1-30-60W-27K-WH L3S1-30-60W-30K-WH
Construction	Silicone-Injected	Silicone-Injected	Silicone-Injected
Finish	White	White	Antique
Input Voltage	10-15V	10-15V	10-15V
Wattage (Volt Amps)	30W (29.74)	40W (39.4)	60W (63)
Module Lumens	72 Lm / Ft, 76 Lm / Ft	72 Lm / Ft, 76 Lm / Ft	72 Lm/Ft, 76 Lm/Ft
Color Temperature	2700K, 3000K	2700K, 3000K	2700K, 3000K
Beam Spread	120°	120°	120°
Lead Wire Length	3'	3'	3'
CRI	80+	80+	80+
RGB	No	No	No
Dimmable	Yes	Yes	Yes
Rated Life	50,000 Hrs	50,000 Hrs	50,000 Hrs
Warranty	3 Years	3 Years	3 Years
Core Drill Size	-	-	-

Accessories - LumienARC



LAA-028

Accessory, Aluminum - Black, LumienARC, Rigid, 1-Sided Glare Shield, 5ft Channel



LAA-027

Accessory, Aluminum - Black, LumienARC, Rigid, 5ft Channel



LAA-029

Accessory, Aluminum - Black, LumienARC, Flex, 5ft Channel



LAA-030

Accessory, Aluminum - Black, LumienARC, Flex, 1-Sided Glare Shield, 5ft Channel



LAA-041

Accessory, LumienARC, Corner, Flush



LAA-042

Accessory, LumienARC, Corner, Inner Tall Wall



LAA-043

Accessory, LumienARC, Corner, Outer Tall Wall



LAA-044

Accessory, LumienARC, Channel Connector



LAA-045

Accessory, LumienARC, Channel Under Cap Plate



LAS-006

Accessory, Stainless Steel, LumienARC Channel Spike