

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2365.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	59.1V x 59.2H
	At 50% of Imax	36.4V x 36.0H
	At 90% of Imax	18.0V x 17.9H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	852.1 lumens per klm.
	To 50% of Imax	558.0 lumens per klm.
	To 90% of Imax	175.3 lumens per klm.

Upward LOR	1.1 %
Downward LOR	98.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2024-02-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.07V I:1.123A P:9.185W PF:0.6774 Freq:59.98Hz Lamp Flux:207.175x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Macro Blue	WEIGHT:
SPEC.:10W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Non Shroud

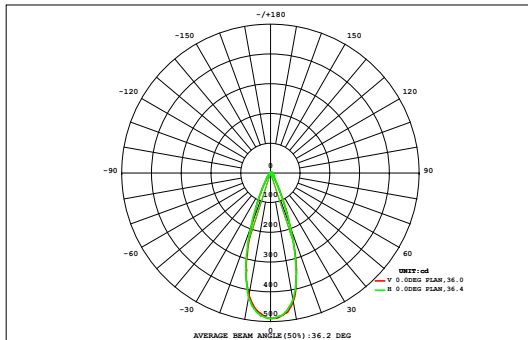

DATA OF LAMP		Eff:22.56lm/W	
MODEL	Z5B1-10W-BLUE-A	Imax (cd)	490.0
NOMINAL POWER (W)	10	AVAILABILITY (%)	85.3
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	176.7
NOMINAL FLUX (lm)	207.175	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	207.2
TEST VOLTAGE (V)	12	θ @50% (H,V)	36,36DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.08	0.09	0.09	0.08	0.08	0.07	0.05	0.04	0.03	0.02	0.01	0.95	0.00
45	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.08	0.09	0.09	0.08	0.08	0.07	0.05	0.04	0.03	0.02	0.01	0.95	0.00
40	0.02	0.03	0.04	0.06	0.08	0.10	0.12	0.13	0.14	0.14	0.13	0.12	0.10	0.08	0.06	0.05	0.03	0.02	1.46	0.00
35	0.03	0.04	0.06	0.09	0.12	0.15	0.19	0.22	0.25	0.25	0.23	0.19	0.15	0.12	0.09	0.06	0.04	0.03	2.30	0.00
30	0.03	0.05	0.08	0.12	0.17	0.25	0.34	0.43	0.49	0.49	0.44	0.34	0.25	0.17	0.12	0.08	0.06	0.04	3.97	1.82
25	0.04	0.07	0.11	0.17	0.27	0.43	0.65	0.89	1.05	1.05	0.90	0.67	0.44	0.27	0.17	0.11	0.07	0.04	7.38	6.02
20	0.05	0.08	0.13	0.23	0.42	0.74	1.20	1.66	1.96	1.97	1.70	1.24	0.77	0.43	0.24	0.14	0.08	0.05	13.1	12.0
15	0.06	0.10	0.17	0.31	0.62	1.16	1.88	2.52	2.88	2.90	2.58	1.95	1.21	0.64	0.32	0.17	0.10	0.06	19.6	18.7
10	0.06	0.11	0.19	0.39	0.82	1.55	2.45	3.11	3.43	3.46	3.19	2.55	1.65	0.86	0.40	0.20	0.11	0.06	24.6	23.7
5	0.07	0.11	0.21	0.44	0.94	1.78	2.72	3.35	3.64	3.67	3.46	2.86	1.91	1.00	0.46	0.22	0.12	0.07	27.0	26.1
0	0.07	0.11	0.21	0.45	0.94	1.78	2.71	3.34	3.63	3.66	3.45	2.85	1.91	1.00	0.46	0.22	0.12	0.07	27.0	26.1
-5	0.06	0.11	0.19	0.40	0.82	1.55	2.42	3.08	3.40	3.43	3.16	2.52	1.64	0.87	0.41	0.20	0.11	0.06	24.4	23.5
-10	0.06	0.10	0.17	0.32	0.63	1.16	1.86	2.47	2.81	2.83	2.53	1.94	1.22	0.65	0.32	0.17	0.10	0.06	19.4	18.4
-15	0.05	0.08	0.14	0.23	0.43	0.76	1.20	1.65	1.93	1.94	1.68	1.24	0.78	0.44	0.24	0.14	0.08	0.05	13.1	12.0
-20	0.04	0.07	0.11	0.17	0.27	0.45	0.67	0.91	1.06	1.06	0.92	0.69	0.45	0.28	0.17	0.11	0.07	0.04	7.54	6.20
-25	0.03	0.05	0.08	0.12	0.17	0.25	0.35	0.45	0.52	0.52	0.46	0.36	0.26	0.18	0.12	0.08	0.06	0.04	4.12	2.16
-30	0.03	0.04	0.06	0.09	0.12	0.15	0.19	0.23	0.26	0.26	0.23	0.20	0.16	0.12	0.09	0.06	0.04	0.03	2.36	0.00
-35	0.02	0.03	0.05	0.06	0.08	0.10	0.12	0.14	0.15	0.15	0.14	0.12	0.10	0.08	0.06	0.05	0.03	0.02	1.49	0.00
-40	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.08	0.09	0.09	0.09	0.08	0.07	0.05	0.04	0.03	0.02	0.01	0.97	0.00
-45	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.08	0.09	0.09	0.09	0.08	0.07	0.05	0.04	0.03	0.02	0.01	0.97	0.00
HORIZONTAL (DEG)																				
Φ t	0.74	1.23	2.06	3.73	7.00	12.5	19.2	24.8	27.8	28.0	25.4	20.0	13.1	7.30	3.82	2.11	1.27	0.77	201	---
Φ a	0.00	0.00	0.00	1.70	5.57	11.2	18.1	23.7	26.7	26.9	24.3	18.8	11.9	5.87	1.90	0.00	0.00	0.00	---	177

one-half-peak spread: U:17.8,D:18.8 , L:16.8,R:17.5


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2024-02-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.07V I:1.123A P:9.185W PF:0.6774 Freq:59.98Hz Lamp Flux:207.175x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Macro Blue	WEIGHT:
SPEC.:10W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Non Shroud

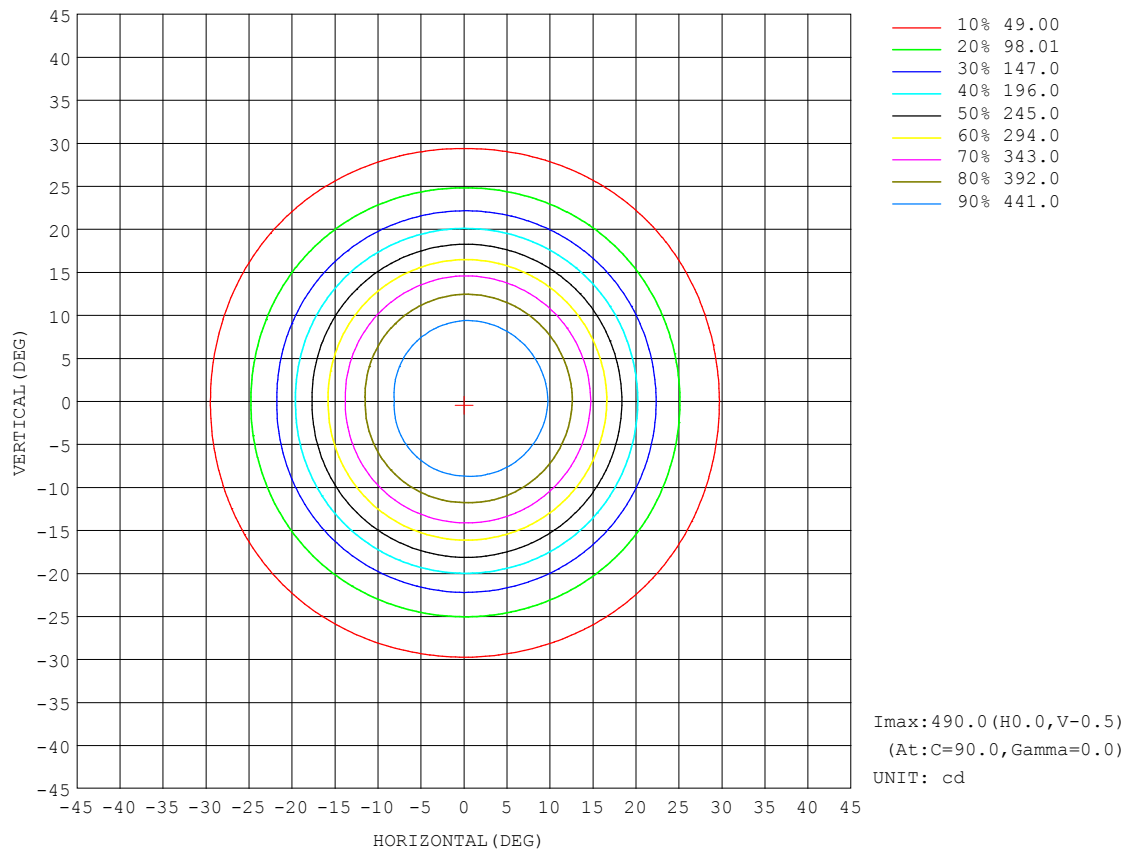


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2024-02-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.07V I:1.123A P:9.185W PF:0.6774 Freq:59.98Hz Lamp Flux:207.175x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Macro Blue	WEIGHT:
SPEC.:10W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Non Shroud

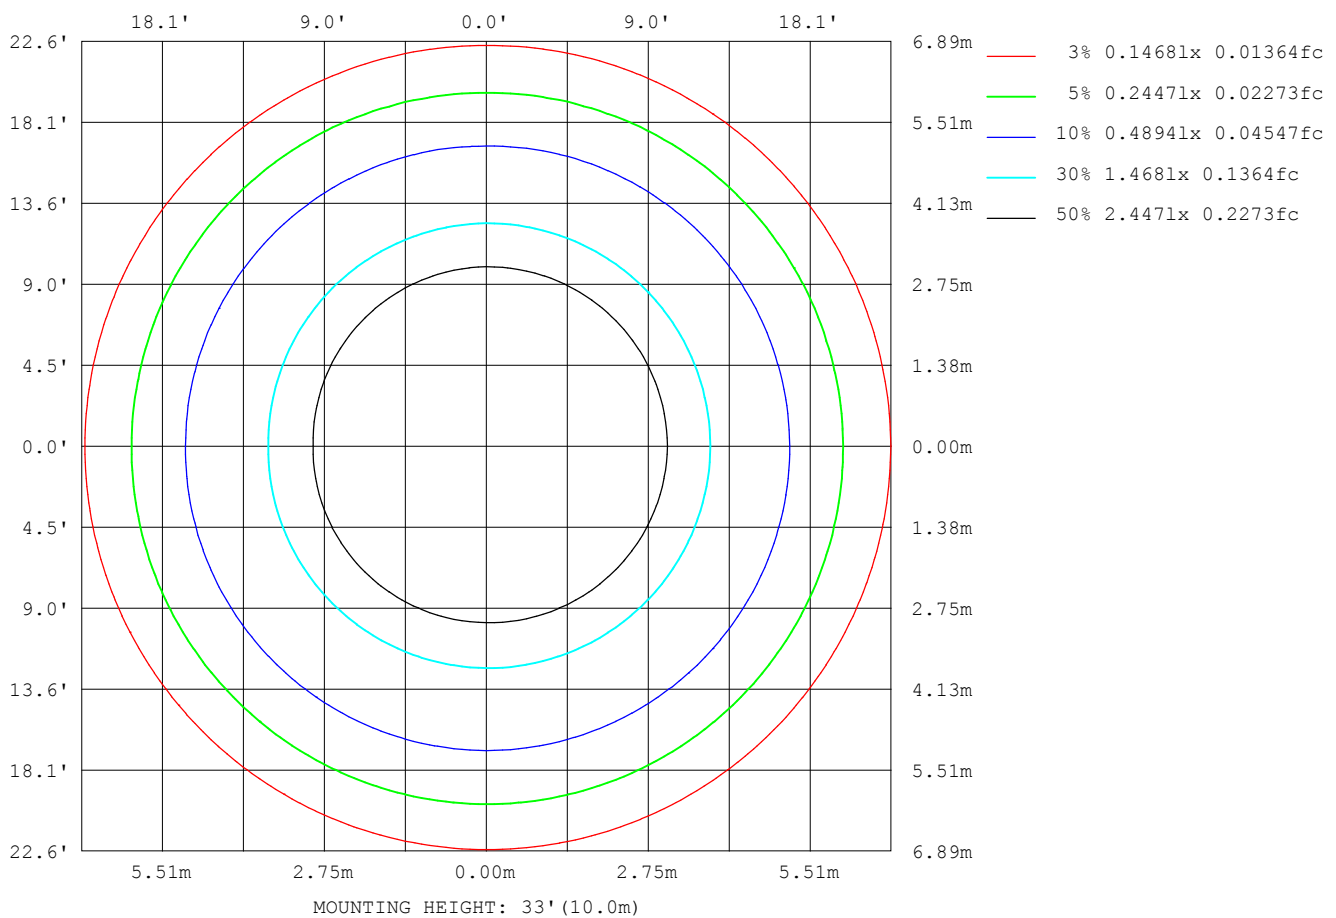

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2024-02-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

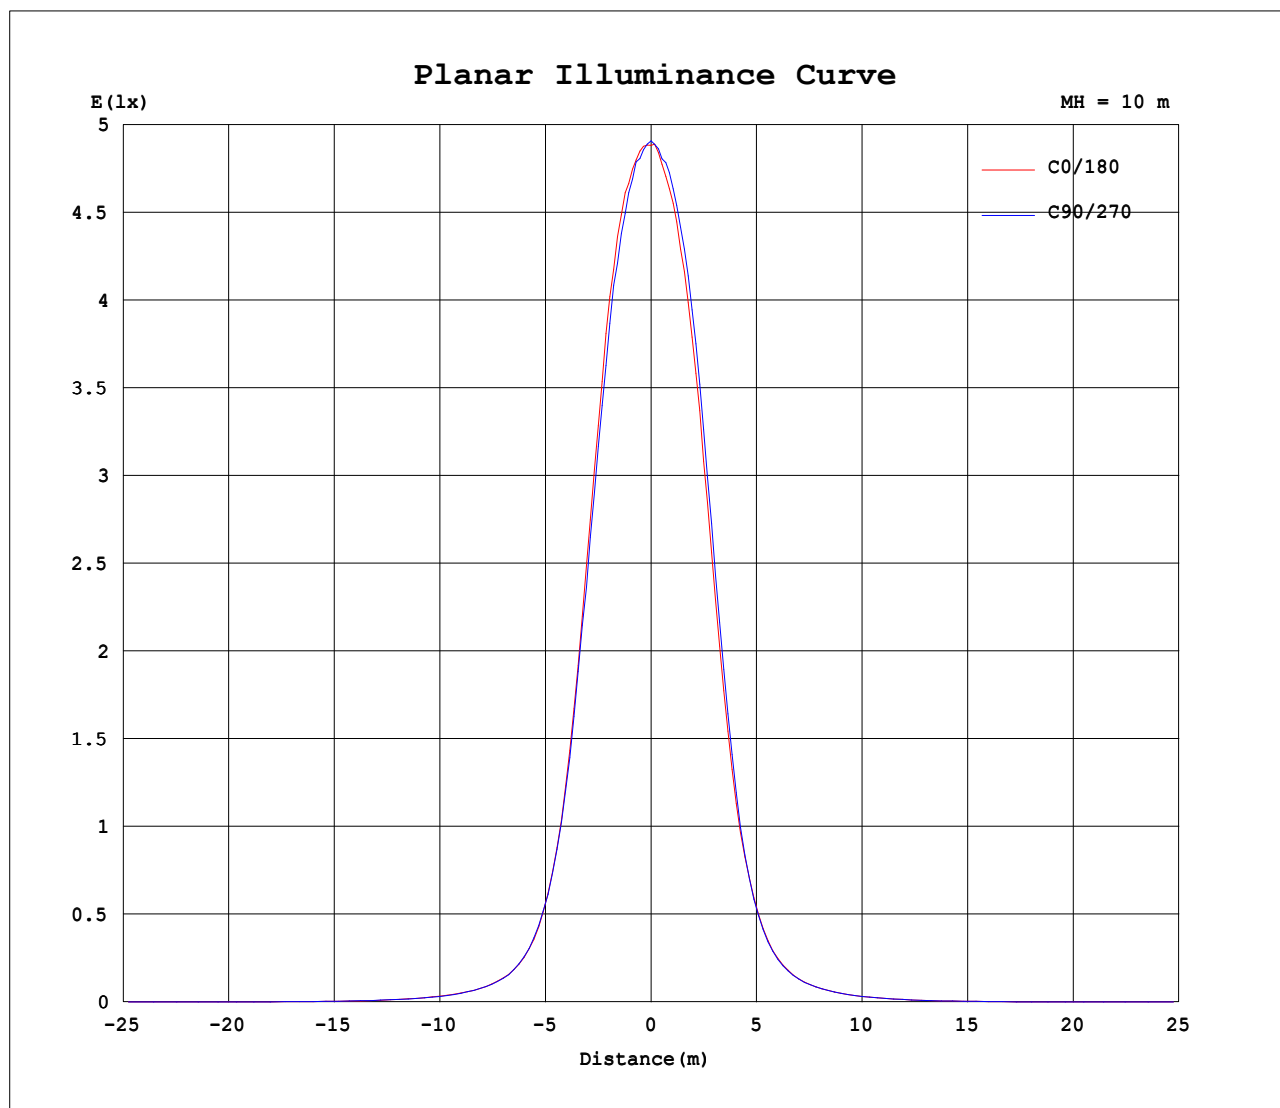


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2024-02-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.07V I:1.123A P:9.185W PF:0.6774 Freq:59.98Hz Lamp Flux:207.175x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Macro Blue	WEIGHT:
SPEC.:10W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Non Shroud

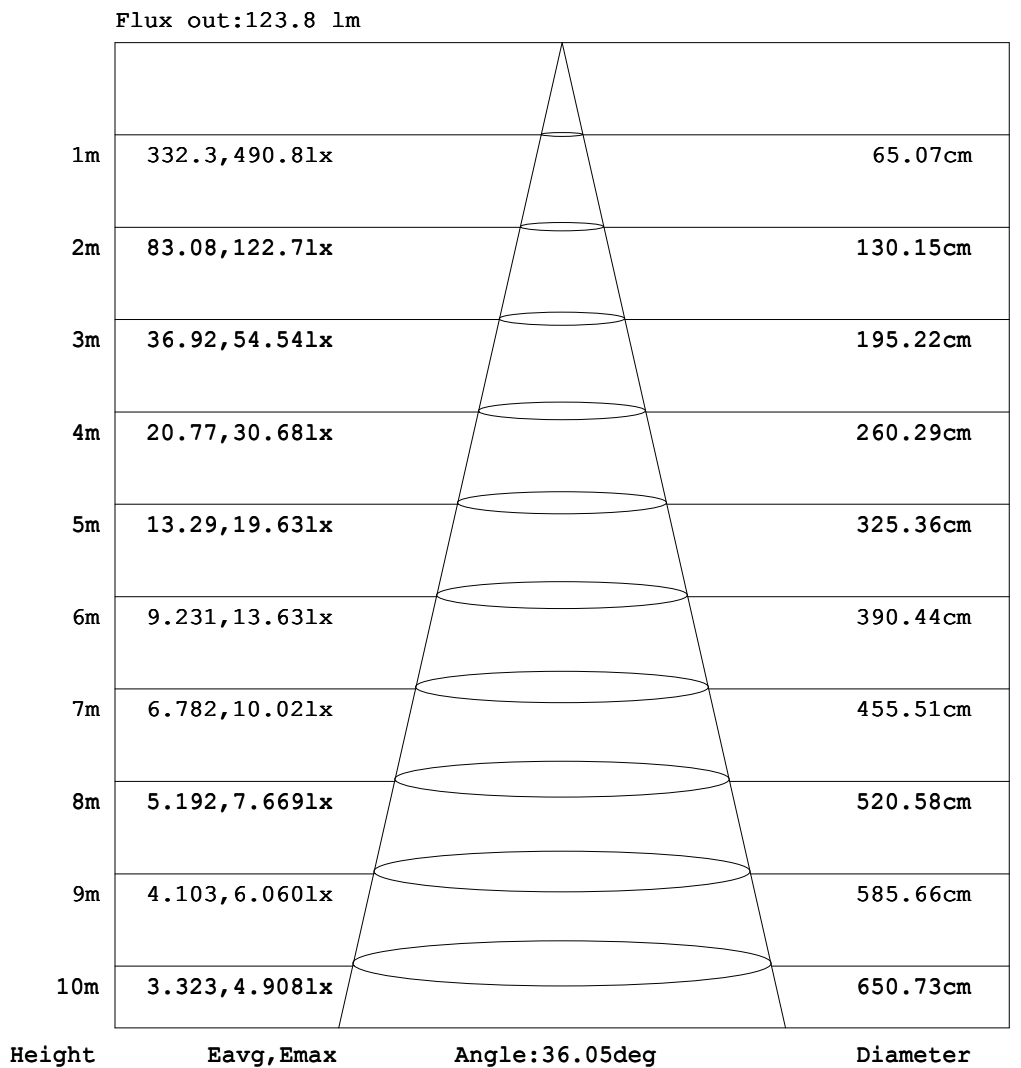

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2024-02-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.07V I:1.123A P:9.185W PF:0.6774 Freq:59.98Hz Lamp Flux:207.175x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Macro Blue	WEIGHT:
SPEC.:10W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Non Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.56	0.99	1.45	1.90	2.26	2.51	2.72	2.87
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.21	0.53	0.95	1.42	1.87	2.23	2.49	2.65	2.75
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.10	0.35	0.68	1.06	1.44	1.80	2.08	2.29	2.40
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.12	0.31	0.55	0.81	1.07	1.28	1.44	1.53
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.13	0.24	0.37	0.49	0.60	0.66
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.21	0.38	0.59	0.82	1.04	1.25	1.40	1.50	1.54
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.43	0.85	1.37	1.99	2.71	3.47	4.22	5.00	5.46	5.77	5.90
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.22	0.68	1.36	2.29	3.55	5.11	6.72	8.40	10.2	12.0	13.6	14.6	15.0
-30	0.00	0.00	0.00	0.00	0.00	0.15	0.62	1.42	2.66	4.45	6.69	9.32	13.0	17.4	23.1	30.3	38.2	44.7	47.2
-20	0.00	0.00	0.00	0.00	0.00	0.32	1.05	2.20	4.07	6.72	10.0	15.2	22.9	37.0	62.3	100.0	144	180	196
-10	0.00	0.00	0.00	0.00	0.03	0.48	1.34	2.85	5.18	8.45	13.4	21.2	37.4	73.3	140	242	339	403	428
0	0.00	0.00	0.00	0.00	0.05	0.54	1.45	3.05	5.51	9.09	14.7	24.0	45.1	95.0	186	316	417	469	488
10	0.00	0.00	0.00	0.00	0.03	0.49	1.33	2.83	5.14	8.46	13.4	21.1	37.0	72.3	139	243	345	409	433
20	0.00	0.00	0.00	0.00	0.00	0.33	1.04	2.17	4.02	6.72	10.0	15.1	22.6	36.2	60.6	97.5	142	182	198
30	0.00	0.00	0.00	0.00	0.00	0.16	0.62	1.38	2.62	4.32	6.69	9.32	12.9	17.3	22.6	29.6	36.6	42.5	44.8
40	0.00	0.00	0.00	0.00	0.00	0.01	0.23	0.67	1.30	2.22	3.45	4.90	6.71	8.42	10.1	11.9	13.3	14.3	14.7
50	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.17	0.44	0.82	1.29	1.88	2.60	3.31	4.00	4.64	5.13	5.50	5.63
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.12	0.23	0.40	0.58	0.77	0.94	1.11	1.25	1.33	1.35
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.07	0.08
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.13	0.14
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.28	0.48	0.66	0.80	0.89	0.91
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.20	0.49	0.81	1.14	1.43	1.67	1.79	1.82
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.45	0.84	1.27	1.70	2.04	2.29	2.43	2.45
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.56	0.99	1.45	1.90	2.26	2.51	2.72	2.82

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2024-02-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.07V I:1.123A P:9.185W PF:0.6774 Freq:59.98Hz Lamp Flux:207.175x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Macro Blue	WEIGHT:
SPEC.:10W BLUE 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Non Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.79	2.77	2.61	2.35	1.96	1.49	0.99	0.59	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	2.74	2.65	2.49	2.20	1.80	1.34	0.89	0.50	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	2.36	2.23	2.01	1.70	1.34	0.97	0.63	0.33	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	1.49	1.38	1.21	0.98	0.74	0.49	0.30	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.63	0.55	0.45	0.34	0.19	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.02	0.03	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	1.51	1.42	1.27	1.06	0.85	0.62	0.40	0.25	0.13	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	5.81	5.54	5.07	4.25	3.51	2.77	2.08	1.44	0.90	0.47	0.20	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
-40	14.7	13.7	12.1	10.3	8.55	6.84	5.40	3.61	2.40	1.45	0.73	0.29	0.06	0.00	0.00	0.00	0.00	0.00	
-30	44.8	38.4	30.5	23.4	17.7	13.2	9.60	6.87	4.55	2.77	1.52	0.68	0.21	0.01	0.00	0.00	0.00	0.00	
-20	182	147	102	63.0	37.6	23.5	15.5	10.4	6.93	4.16	2.35	1.12	0.39	0.06	0.00	0.00	0.00	0.00	
-10	410	351	254	148	75.5	38.2	22.0	13.7	8.80	5.70	2.98	1.46	0.54	0.11	0.00	0.00	0.00	0.00	
0	480	437	337	201	99.7	47.1	24.9	15.0	9.56	6.02	3.20	1.58	0.61	0.13	0.00	0.00	0.00	0.00	
10	417	356	255	147	74.5	37.8	21.8	13.6	8.81	5.67	2.96	1.45	0.54	0.11	0.00	0.00	0.00	0.00	
20	184	145	99.7	61.3	36.8	23.3	15.4	10.4	6.94	4.11	2.32	1.11	0.39	0.07	0.00	0.00	0.00	0.00	
30	42.7	36.8	29.8	23.0	17.5	13.1	9.60	6.87	4.42	2.72	1.48	0.67	0.22	0.01	0.00	0.00	0.00	0.00	
40	14.4	13.4	12.0	10.3	8.57	6.84	5.19	3.51	2.33	1.39	0.72	0.30	0.07	0.00	0.00	0.00	0.00	0.00	
50	5.53	5.22	4.71	4.03	3.36	2.66	1.97	1.36	0.86	0.48	0.22	0.06	0.00	0.00	0.00	0.00	0.00	0.00	
60	1.34	1.26	1.14	0.96	0.79	0.60	0.42	0.27	0.15	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.08	0.07	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.17	0.18	0.12	0.10	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.94	0.90	0.81	0.65	0.47	0.29	0.18	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	1.86	1.81	1.64	1.39	1.09	0.78	0.48	0.24	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	2.51	2.45	2.29	2.03	1.65	1.22	0.81	0.44	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	2.79	2.77	2.61	2.35	1.96	1.49	0.99	0.59	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2024-02-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: