

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	734.7 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	105.3V x 142.2H
	At 50% of Imax	50.8V x 79.2H
	At 90% of Imax	18.9V x 29.9H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	932.5 lumens per klm.
	To 50% of Imax	494.9 lumens per klm.
	To 90% of Imax	88.9 lumens per klm.

Upward LOR	0.9 %
Downward LOR	99.1 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-12-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.08V I:0.7068A P:5.402W PF:0.6325 Freq:59.97Hz Lamp Flux:311.934x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Step Light	WEIGHT:
SPEC.:5.5W 2700K Striated glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

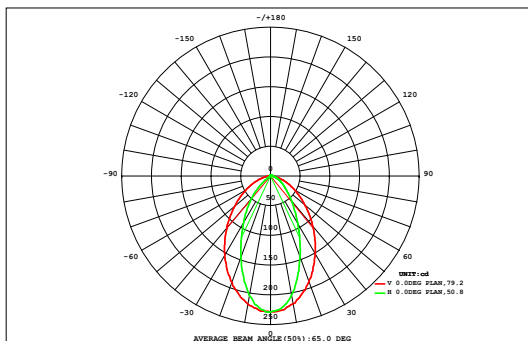

DATA OF LAMP		Eff:57.74lm/W	
MODEL	M4B7-5.5W-27K-A	Imax (cd)	229.2
NOMINAL POWER (W)	5.5	AVAILABILITY (%)	92.9
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	289.7
NOMINAL FLUX (lm)	311.934	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	311.9
TEST VOLTAGE (V)	12	θ @50% (H,V)	79,51DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.01	0.03	0.04	0.04	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.34	0.00
90	0.00	0.01	0.03	0.07	0.12	0.17	0.21	0.22	0.22	0.22	0.22	0.19	0.16	0.11	0.07	0.03	0.01	0.00	2.06	0.00
80	0.00	0.02	0.09	0.18	0.28	0.38	0.46	0.49	0.49	0.48	0.48	0.43	0.35	0.26	0.17	0.09	0.02	0.00	4.67	0.00
70	0.00	0.05	0.15	0.31	0.48	0.65	0.79	0.86	0.84	0.83	0.83	0.74	0.60	0.45	0.29	0.15	0.04	0.00	8.06	5.72
60	0.00	0.07	0.22	0.46	0.73	1.00	1.25	1.40	1.39	1.37	1.34	1.18	0.93	0.68	0.43	0.21	0.07	0.01	12.7	12.0
50	0.01	0.09	0.30	0.62	1.03	1.47	1.90	2.23	2.29	2.25	2.14	1.78	1.37	0.97	0.59	0.28	0.09	0.01	19.4	18.9
40	0.01	0.11	0.36	0.79	1.37	2.06	2.78	3.41	3.66	3.61	3.28	2.62	1.94	1.30	0.75	0.35	0.10	0.01	28.5	28.2
30	0.01	0.12	0.42	0.95	1.71	2.67	3.75	4.77	5.35	5.29	4.62	3.60	2.55	1.63	0.90	0.40	0.12	0.01	38.9	38.6
20	0.01	0.13	0.46	1.07	1.98	3.18	4.51	5.77	6.59	6.55	5.70	4.41	3.07	1.90	1.02	0.44	0.13	0.01	46.9	46.7
10	0.01	0.13	0.45	1.06	1.98	3.17	4.51	5.77	6.59	6.57	5.74	4.44	3.08	1.91	1.01	0.44	0.13	0.01	47.0	46.7
0	0.01	0.12	0.39	0.90	1.68	2.65	3.72	4.75	5.35	5.34	4.73	3.68	2.59	1.63	0.87	0.38	0.11	0.01	38.9	38.6
-10	0.01	0.10	0.31	0.70	1.31	2.02	2.74	3.38	3.65	3.65	3.38	2.72	1.99	1.29	0.69	0.30	0.09	0.01	28.3	27.9
-20	0.01	0.08	0.23	0.48	0.89	1.38	1.82	2.16	2.23	2.23	2.16	1.82	1.38	0.90	0.48	0.23	0.07	0.01	18.6	17.8
-30	0.00	0.06	0.16	0.29	0.46	0.74	1.02	1.14	1.09	1.09	1.15	1.04	0.79	0.49	0.29	0.16	0.05	0.00	10.0	8.28
-40	0.00	0.04	0.10	0.15	0.17	0.23	0.36	0.40	0.33	0.34	0.43	0.40	0.27	0.19	0.15	0.10	0.04	0.00	3.70	0.19
-50	0.00	0.02	0.05	0.07	0.04	0.03	0.06	0.06	0.05	0.05	0.08	0.07	0.05	0.04	0.07	0.05	0.02	0.00	0.82	0.00
-60	0.00	0.00	0.02	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.02	0.01	0.00	0.13	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.08	1.13	3.77	8.13	14.3	21.8	29.9	36.9	40.2	39.9	36.3	29.2	21.2	13.8	7.82	3.63	1.11	0.09	309	---
Φ a	0.00	0.04	2.43	6.90	13.2	20.7	28.8	35.7	38.9	38.6	35.0	28.0	20.0	12.6	6.57	2.23	0.02	0.00	---	290


one-half-peak spread: U:25.2,D:26.2 , L:36.5,R:39.5 NEMA Beam Type: Type 7 x 6 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-12-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.08V I:0.7068A P:5.402W PF:0.6325 Freq:59.97Hz Lamp Flux:311.934x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Step Light	WEIGHT:
SPEC.:5.5W 2700K Striated glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

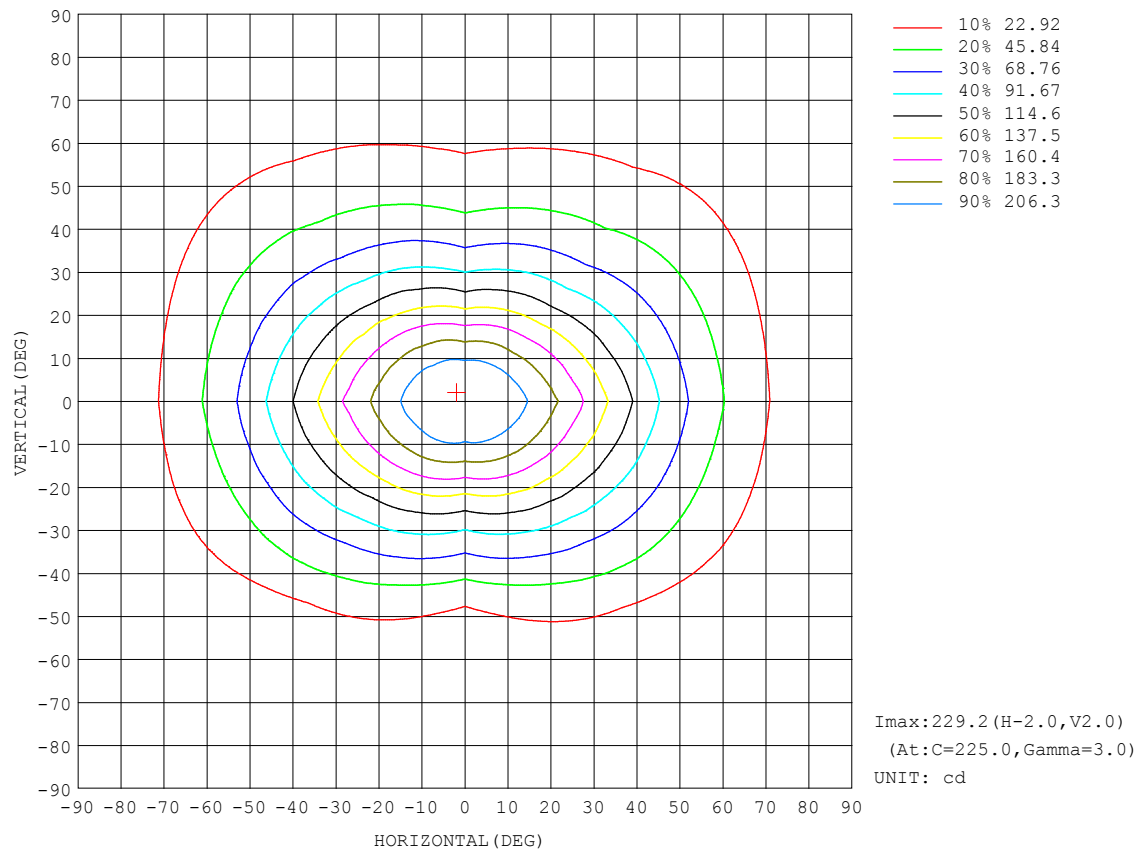


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-12-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.08V I:0.7068A P:5.402W PF:0.6325 Freq:59.97Hz Lamp Flux:311.934x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Step Light	WEIGHT:
SPEC.:5.5W 2700K Striated glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

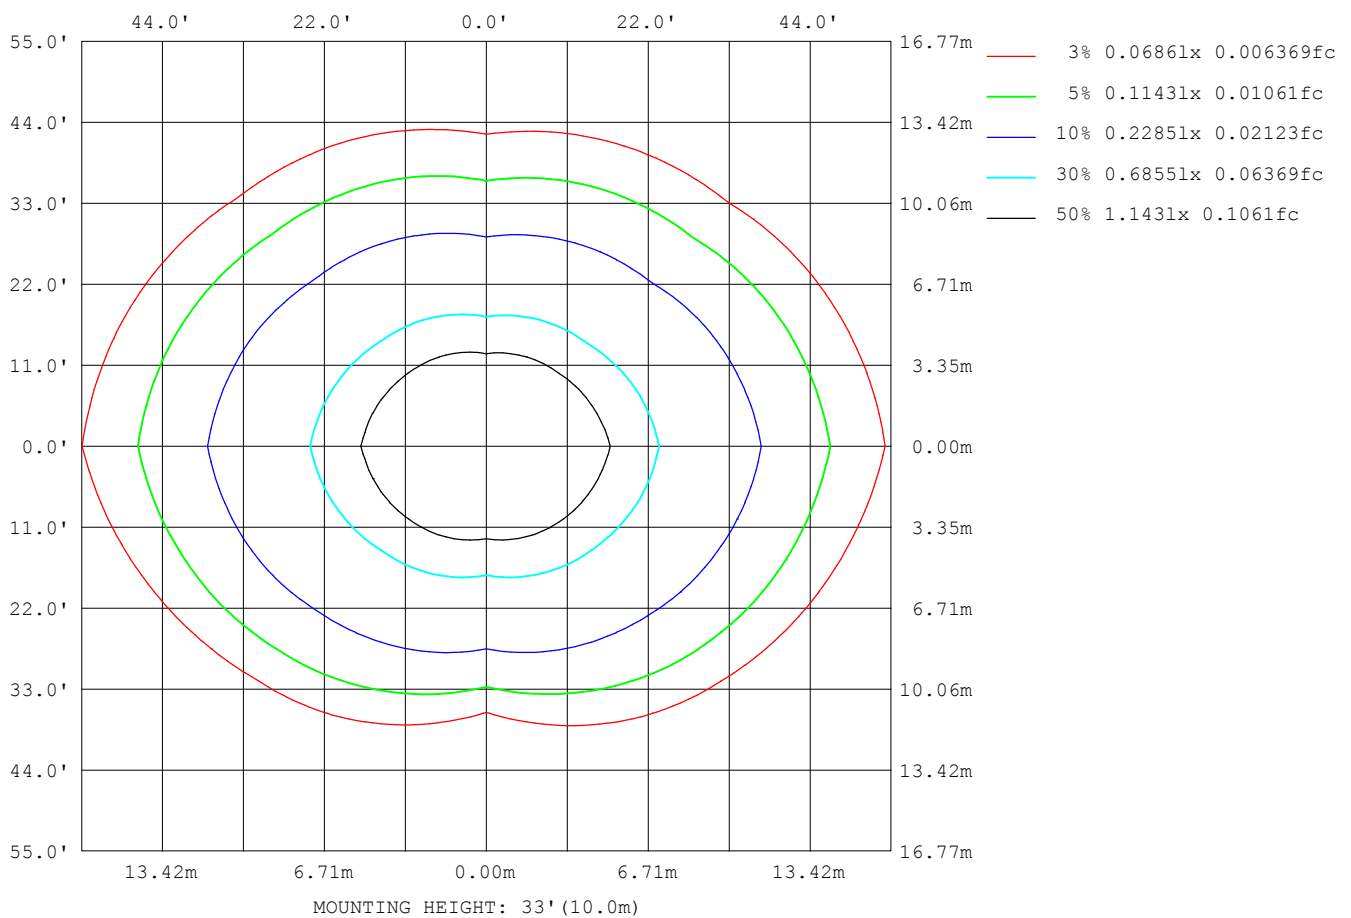

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-12-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

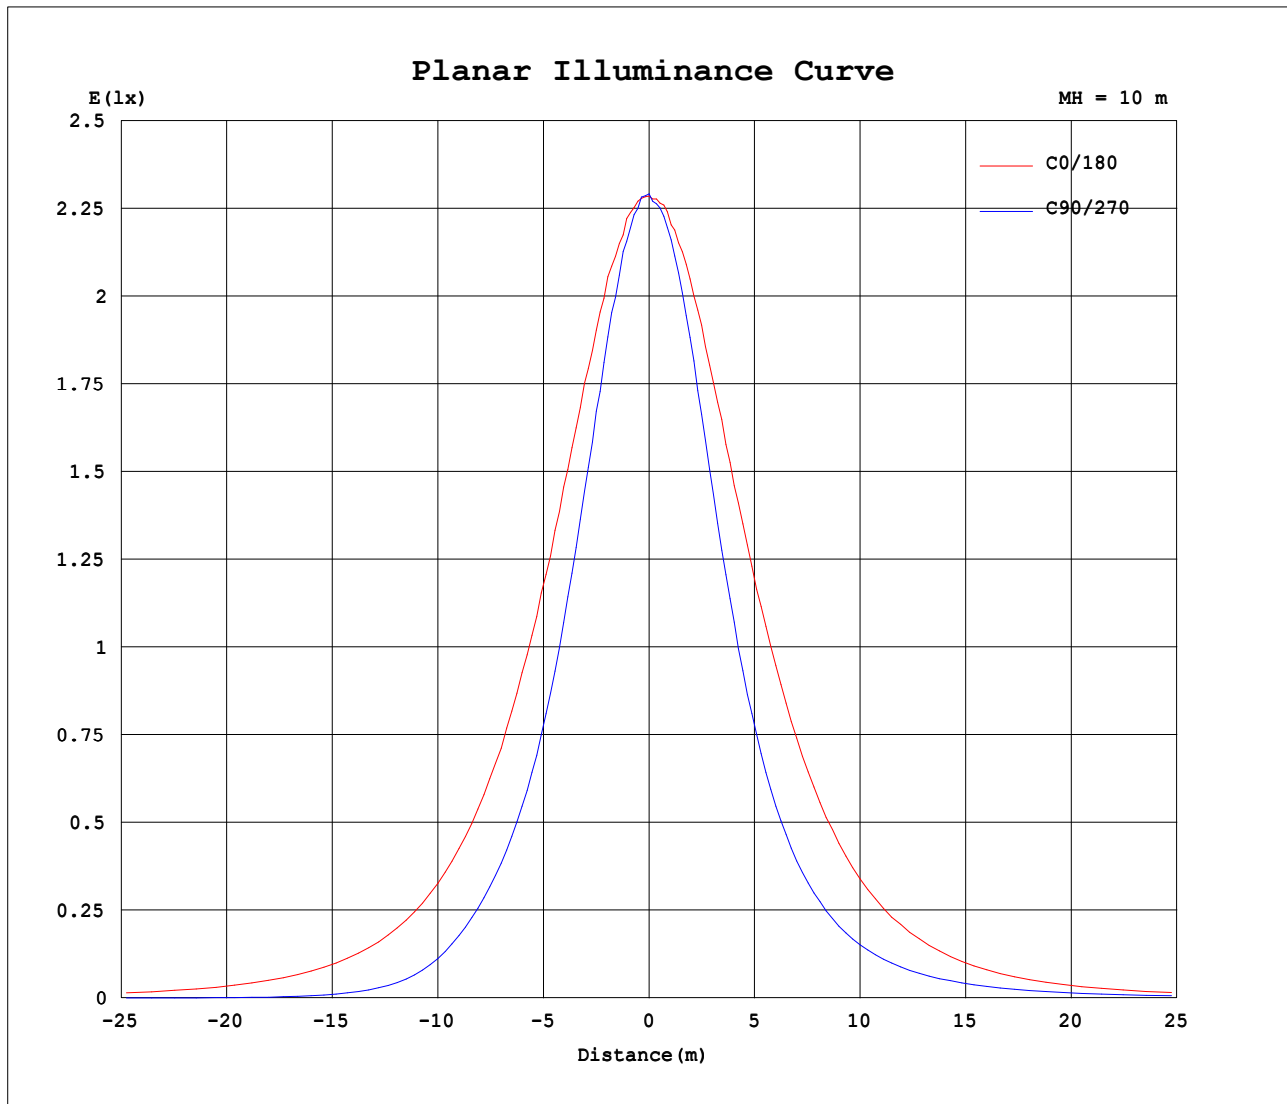


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-12-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.08V I:0.7068A P:5.402W PF:0.6325 Freq:59.97Hz Lamp Flux:311.934x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Step Light	WEIGHT:
SPEC.:5.5W 2700K Striated glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

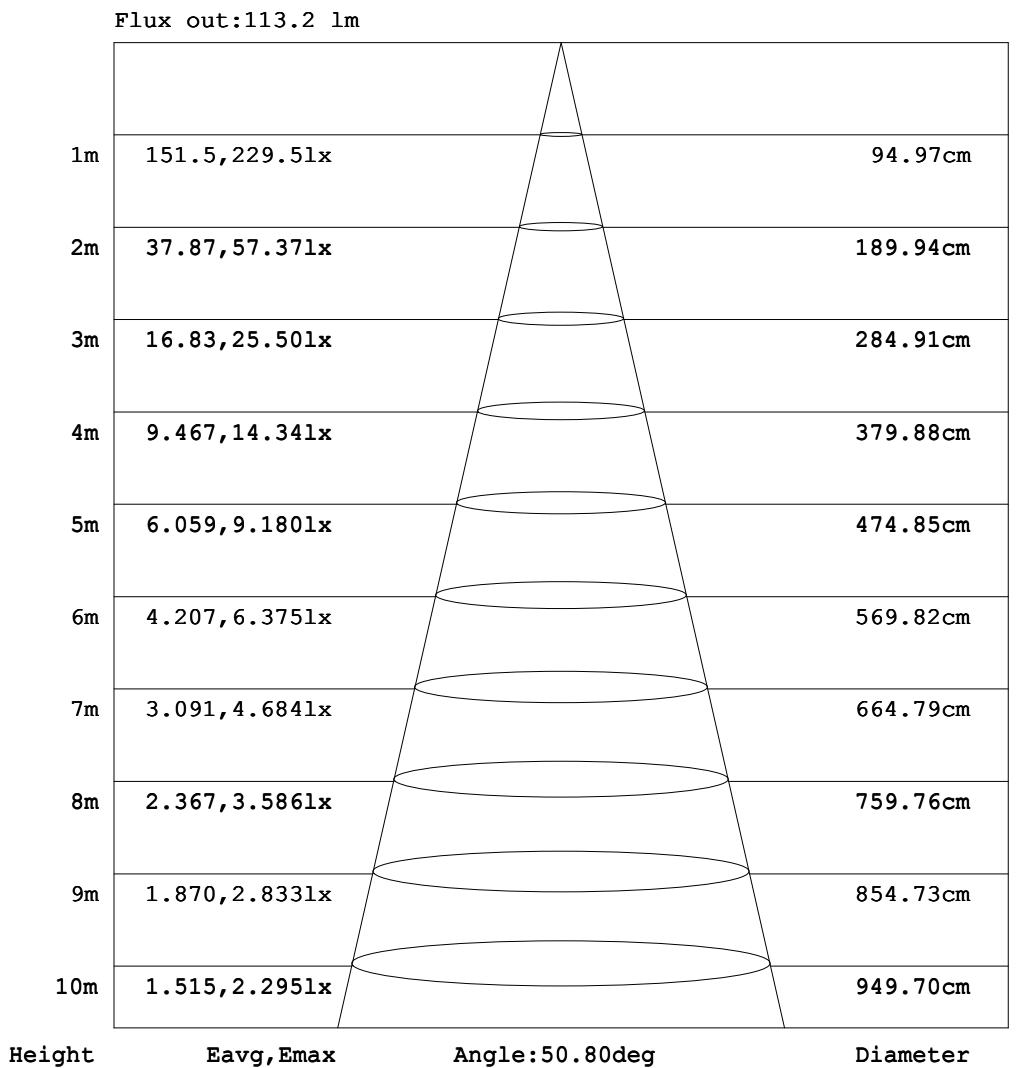

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-12-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.7068A P:5.402W PF:0.6325 Freq:59.97Hz Lamp Flux:311.934x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Step Light	WEIGHT:
SPEC.:5.5W 2700K Striated glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.06	0.14	0.27	0.41	0.56	0.72	0.87	1.02	1.20	1.35	1.49	1.63	1.74	1.83	1.88
-170	0.00	0.00	0.00	0.00	0.05	0.15	0.27	0.40	0.54	0.69	0.86	1.03	1.20	1.36	1.52	1.65	1.77	1.81	1.82
-160	0.00	0.00	0.00	0.00	0.03	0.13	0.23	0.36	0.49	0.63	0.79	0.94	1.10	1.25	1.40	1.50	1.57	1.62	1.65
-150	0.00	0.00	0.00	0.00	0.01	0.09	0.17	0.28	0.39	0.52	0.64	0.77	0.90	1.03	1.11	1.17	1.23	1.24	1.23
-140	0.00	0.00	0.00	0.00	0.00	0.03	0.11	0.18	0.28	0.38	0.47	0.56	0.64	0.71	0.75	0.80	0.80	0.80	0.78
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.10	0.15	0.22	0.29	0.34	0.38	0.41	0.42	0.43	0.44	0.43	0.41
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.12	0.14	0.14	0.16	0.18	0.18	0.17	0.15	0.12
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.01	0.01	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.15	0.39	0.55	0.57	0.40	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.21	1.19	2.14	2.72	2.88	2.61	1.83	0.57	0.11	0.23	0.32	0.35	0.36	0.33	0.27	0.17	0.05
-60	0.00	0.00	1.31	3.26	4.80	5.83	6.27	6.10	5.19	3.79	2.55	3.59	4.55	5.27	5.64	5.56	5.09	4.18	2.96
-50	0.00	0.13	2.74	5.56	7.98	9.93	11.2	12.0	12.6	13.3	14.2	17.1	21.1	23.9	25.0	24.6	23.0	20.4	16.8
-40	0.00	0.50	4.16	8.04	11.7	14.9	18.0	21.2	25.2	30.7	37.4	42.9	47.4	51.2	53.8	55.7	55.8	54.4	51.0
-30	0.00	0.92	5.52	10.5	15.6	20.7	26.3	33.0	41.6	51.6	60.2	68.1	75.2	81.8	88.3	93.3	95.9	95.2	91.1
-20	0.00	1.29	6.68	12.8	19.4	26.7	35.0	45.3	57.4	69.6	81.9	93.8	106	118	128	139	147	150	146
-10	0.00	1.54	7.55	14.8	22.9	32.2	42.9	55.6	70.0	85.2	101	117	135	151	168	183	196	204	204
0	0.00	1.64	8.06	16.1	25.4	36.3	48.6	62.8	79.1	96.1	114	135	154	173	190	206	219	227	229
10	0.00	1.55	7.73	15.4	24.0	33.9	45.0	57.4	71.1	85.7	102	118	135	152	168	183	196	203	204
20	0.00	1.32	7.01	13.9	21.5	30.1	39.3	49.5	60.0	71.3	83.2	94.7	107	118	128	140	147	149	145
30	0.00	0.96	5.93	11.8	18.4	25.2	32.5	40.2	47.8	55.5	63.0	70.2	76.6	83.5	89.7	94.7	96.5	95.8	91.6
40	0.00	0.53	4.57	9.39	14.6	19.9	25.3	30.6	35.8	40.6	45.1	48.6	52.2	55.7	58.8	60.0	60.1	58.5	55.3
50	0.00	0.14	3.07	6.72	10.6	14.5	18.2	21.7	25.0	27.9	30.1	32.3	34.4	36.1	36.9	37.3	36.8	35.5	33.5
60	0.00	0.01	1.49	4.04	6.66	9.24	11.8	14.0	15.8	17.3	18.6	20.1	21.2	22.1	22.5	22.3	22.0	21.2	20.0
70	0.00	0.00	0.27	1.51	3.03	4.52	5.91	7.15	8.18	9.07	9.92	10.6	11.3	11.6	11.8	11.8	11.6	11.3	10.8
80	0.00	0.00	0.00	0.03	0.27	0.71	1.19	1.67	2.08	2.40	2.82	3.18	3.47	3.68	3.83	3.90	3.90	3.84	3.73
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.03	0.02	0.06	0.10	0.11	0.13	0.15	0.16	0.14	0.12
140	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.08	0.10	0.17	0.20	0.27	0.30	0.40	0.41	0.46	0.48	0.48	0.47
150	0.00	0.00	0.00	0.00	0.00	0.06	0.10	0.16	0.25	0.32	0.41	0.50	0.60	0.64	0.74	0.81	0.86	0.89	0.89
160	0.00	0.00	0.00	0.00	0.02	0.10	0.17	0.27	0.38	0.49	0.61	0.73	0.84	0.95	1.04	1.18	1.25	1.33	1.35
170	0.00	0.00	0.00	0.00	0.04	0.13	0.23	0.35	0.49	0.62	0.77	0.91	1.05	1.20	1.32	1.42	1.52	1.62	1.69
180	0.00	0.00	0.00	0.00	0.06	0.14	0.27	0.41	0.56	0.72	0.87	1.02	1.20	1.35	1.49	1.63	1.74	1.83	1.88

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2021-12-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.7068A P:5.402W PF:0.6325 Freq:59.97Hz Lamp Flux:311.934x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Step Light	WEIGHT:
SPEC.:5.5W 2700K Striated glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.84	1.83	1.71	1.65	1.53	1.39	1.25	1.12	0.95	0.79	0.61	0.46	0.30	0.17	0.05	0.00	0.00	0.00	
-170	1.85	1.83	1.73	1.62	1.51	1.35	1.21	1.05	0.90	0.74	0.59	0.43	0.28	0.16	0.04	0.00	0.00	0.00	
-160	1.64	1.61	1.57	1.47	1.35	1.22	1.08	0.94	0.80	0.67	0.54	0.38	0.25	0.13	0.03	0.00	0.00	0.00	
-150	1.26	1.26	1.22	1.16	1.09	0.99	0.87	0.76	0.64	0.53	0.40	0.29	0.20	0.11	0.01	0.00	0.00	0.00	
-140	0.82	0.82	0.83	0.79	0.77	0.70	0.63	0.55	0.47	0.37	0.29	0.21	0.12	0.04	0.00	0.00	0.00	0.00	
-130	0.44	0.46	0.45	0.45	0.44	0.41	0.38	0.33	0.28	0.22	0.18	0.11	0.06	0.00	0.00	0.00	0.00	0.00	
-120	0.15	0.18	0.19	0.20	0.18	0.18	0.16	0.16	0.12	0.09	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.01	0.02	0.03	0.04	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.43	0.67	0.73	0.67	0.48	0.21	0.00	0.00	0.00	
-70	0.22	0.37	0.45	0.48	0.46	0.41	0.31	0.19	0.59	1.78	2.53	2.86	2.75	2.28	1.54	0.68	0.00	0.00	
-60	4.49	5.69	6.40	6.63	6.38	5.66	4.62	3.40	4.21	5.27	5.96	6.08	5.70	4.75	3.37	1.73	0.25	0.00	
-50	20.5	23.3	25.1	25.8	25.3	23.3	19.8	16.3	14.4	13.1	12.0	11.0	9.61	7.78	5.51	2.98	0.65	0.00	
-40	54.3	55.9	55.5	53.7	50.9	47.9	43.6	38.4	32.0	26.0	21.2	17.7	14.6	11.3	7.81	4.28	1.09	0.00	
-30	95.2	95.9	92.8	88.1	81.0	74.7	67.5	59.6	50.9	41.7	32.9	25.8	20.1	15.1	10.2	5.53	1.50	0.00	
-20	149	146	139	127	117	104	91.8	80.1	68.0	56.0	44.4	34.2	25.9	18.9	12.4	6.63	1.83	0.00	
-10	203	195	182	166	150	132	115	98.2	82.5	67.6	53.8	41.5	31.0	22.1	14.3	7.48	2.06	0.00	
0	226	218	205	189	169	151	130	111	92.5	75.4	60.2	46.7	34.9	24.5	15.5	7.98	2.16	0.00	
10	202	191	179	164	147	130	113	97.3	82.2	67.8	54.7	43.0	32.5	23.1	14.8	7.64	2.07	0.00	
20	148	144	135	124	113	101	90.1	78.9	67.8	57.1	46.9	37.5	28.7	20.8	13.3	6.93	1.86	0.00	
30	94.4	93.9	90.8	85.1	78.2	71.8	65.8	59.3	52.3	45.1	38.0	30.8	24.0	17.6	11.4	5.90	1.53	0.00	
40	57.6	58.4	57.5	55.5	52.5	48.6	45.0	41.9	38.0	33.6	28.8	23.9	19.0	13.9	9.04	4.65	1.12	0.00	
50	35.0	35.7	35.9	35.2	34.0	32.1	29.8	27.8	25.9	23.4	20.5	17.3	13.8	10.2	6.56	3.27	0.66	0.00	
60	20.8	21.4	21.6	21.4	20.8	19.9	18.7	17.2	16.1	14.8	13.1	11.1	8.81	6.43	4.07	1.90	0.25	0.00	
70	11.1	11.4	11.4	11.3	11.0	10.5	9.93	9.12	8.34	7.60	6.67	5.58	4.37	3.08	1.82	0.73	0.00	0.00	
80	3.78	3.79	3.74	3.63	3.45	3.22	2.91	2.56	2.16	1.93	1.65	1.30	0.95	0.59	0.24	0.01	0.00	0.00	
90	0.40	0.35	0.30	0.25	0.20	0.15	0.10	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.14	0.16	0.16	0.14	0.11	0.10	0.05	0.04	0.06	0.08	0.09	0.07	0.05	0.00	0.00	0.00	0.00	0.00	
140	0.49	0.49	0.47	0.43	0.40	0.31	0.29	0.24	0.24	0.17	0.16	0.14	0.09	0.04	0.00	0.00	0.00	0.00	
150	0.91	0.90	0.85	0.78	0.72	0.64	0.57	0.49	0.43	0.36	0.26	0.21	0.16	0.10	0.01	0.00	0.00	0.00	
160	1.35	1.31	1.22	1.15	1.06	0.95	0.85	0.74	0.63	0.53	0.44	0.31	0.22	0.12	0.03	0.00	0.00	0.00	
170	1.66	1.59	1.54	1.45	1.36	1.21	1.08	0.95	0.82	0.67	0.53	0.39	0.26	0.15	0.04	0.00	0.00	0.00	
180	1.84	1.83	1.71	1.65	1.53	1.39	1.25	1.12	0.95	0.79	0.61	0.46	0.30	0.17	0.05	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2021-12-09

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: