

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1034.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	77.1V x 73.4H
	At 50% of Imax	59.6V x 61.2H
	At 90% of Imax	48.3V x 52.1H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	924.4 lumens per klm.
	To 50% of Imax	803.8 lumens per klm.
	To 90% of Imax	565.4 lumens per klm.
	Upward LOR	1.6 %
	Downward LOR	98.4 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.02V I:1.242A P:10.15W PF:0.6801 Freq:60.08Hz Lamp Flux:585.783x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:WITH SHROUD

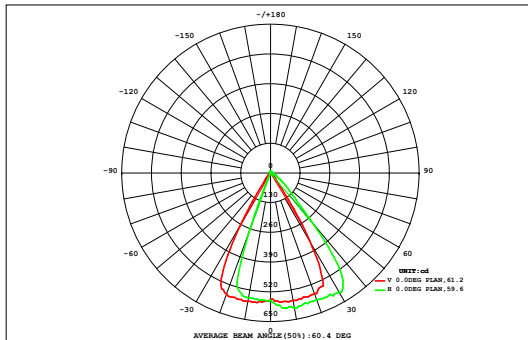

DATA OF LAMP		Eff:57.71lm/W	
MODEL	D3A1-12W-27K-BZ	Imax (cd)	605.7
NOMINAL POWER (W)	12	AVAILABILITY (%)	91.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	536.5
NOMINAL FLUX (lm)	585.783	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	585.8
TEST VOLTAGE (V)	12	θ @50% (H,V)	61,60DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.02	0.04	0.07	0.11	0.16	0.22	0.27	0.32	0.32	0.27	0.22	0.16	0.11	0.07	0.04	0.02	0.01	2.40	0.00
72	0.01	0.02	0.04	0.07	0.11	0.16	0.22	0.27	0.32	0.32	0.27	0.22	0.16	0.11	0.07	0.04	0.02	0.01	2.40	0.00
64	0.01	0.03	0.06	0.11	0.19	0.30	0.43	0.56	0.67	0.67	0.56	0.43	0.30	0.20	0.12	0.06	0.03	0.01	4.72	0.00
56	0.01	0.04	0.09	0.18	0.32	0.53	0.80	1.09	1.35	1.35	1.10	0.80	0.53	0.32	0.18	0.09	0.04	0.01	8.84	3.12
48	0.02	0.05	0.12	0.26	0.50	0.91	1.49	2.25	3.00	3.01	2.26	1.50	0.92	0.51	0.26	0.12	0.05	0.02	17.2	13.8
40	0.02	0.06	0.15	0.35	0.75	1.59	3.55	6.32	8.62	8.66	6.38	3.59	1.62	0.76	0.35	0.15	0.06	0.02	43.0	40.5
32	0.02	0.06	0.17	0.43	1.10	3.26	6.71	9.60	11.2	11.3	9.94	7.06	3.35	1.13	0.44	0.17	0.07	0.02	66.0	64.0
24	0.02	0.06	0.18	0.49	1.63	4.70	8.75	10.9	11.4	11.4	11.0	9.33	5.20	1.70	0.51	0.18	0.07	0.02	77.5	75.8
	0.02	0.06	0.16	0.48	1.81	5.84	10.0	11.0	11.4	11.4	11.0	10.2	6.71	2.02	0.52	0.17	0.06	0.02	83.1	81.6
	0.01	0.04	0.12	0.38	1.47	6.48	10.3	10.9	11.2	11.2	10.9	10.3	7.44	1.87	0.42	0.13	0.05	0.02	83.3	81.8
	0.01	0.03	0.09	0.27	1.01	5.64	9.56	10.7	10.9	10.9	10.7	9.54	6.60	1.41	0.31	0.10	0.04	0.01	77.9	76.3
	0.01	0.03	0.07	0.21	0.64	3.44	7.08	9.70	10.7	10.6	9.66	7.27	4.31	0.85	0.24	0.08	0.03	0.01	64.9	63.3
-24	0.01	0.02	0.06	0.14	0.36	1.27	3.62	4.82	5.66	5.65	4.92	4.19	1.76	0.43	0.16	0.06	0.03	0.01	33.2	31.3
-32	0.01	0.02	0.04	0.09	0.19	0.38	0.90	1.43	0.89	1.00	1.77	1.24	0.47	0.22	0.10	0.05	0.02	0.01	8.83	5.06
-40	0.01	0.02	0.03	0.05	0.09	0.15	0.21	0.21	0.11	0.14	0.27	0.24	0.18	0.11	0.06	0.03	0.02	0.01	1.94	0.00
-48	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.06	0.02	0.03	0.07	0.08	0.07	0.05	0.04	0.02	0.01	0.01	0.72	0.00
-56	0.00	0.01	0.01	0.02	0.03	0.03	0.03	0.02	0.01	0.01	0.02	0.03	0.03	0.03	0.02	0.01	0.01	0.00	0.33	0.00
-64	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.00	0.17	0.00
-72	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.08	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.19	0.56	1.41	3.57	10.3	34.8	63.8	79.9	87.5	87.7	80.8	66.1	39.7	11.7	3.82	1.50	0.60	0.22	574	---
Φ a	0.00	0.00	0.00	0.00	6.22	32.1	61.5	77.9	85.5	85.8	78.8	63.8	37.1	7.83	0.00	0.00	0.00	0.00	---	536

one-half-peak spread: U:9.8,D:8.9 , L:10.9,R:6.4


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.02V I:1.242A P:10.15W PF:0.6801 Freq:60.08Hz Lamp Flux:585.783x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:WITH SHROUD

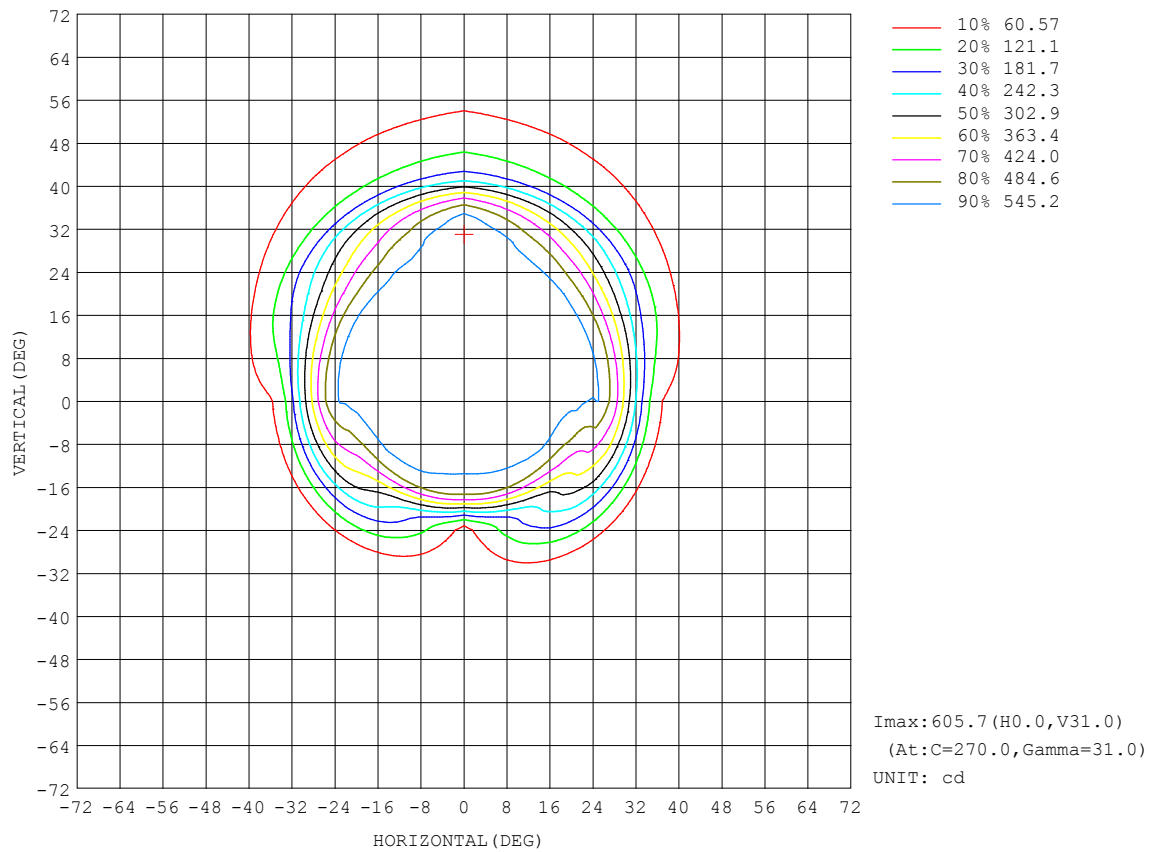


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.02V I:1.242A P:10.15W PF:0.6801 Freq:60.08Hz Lamp Flux:585.783x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:WITH SHROUD

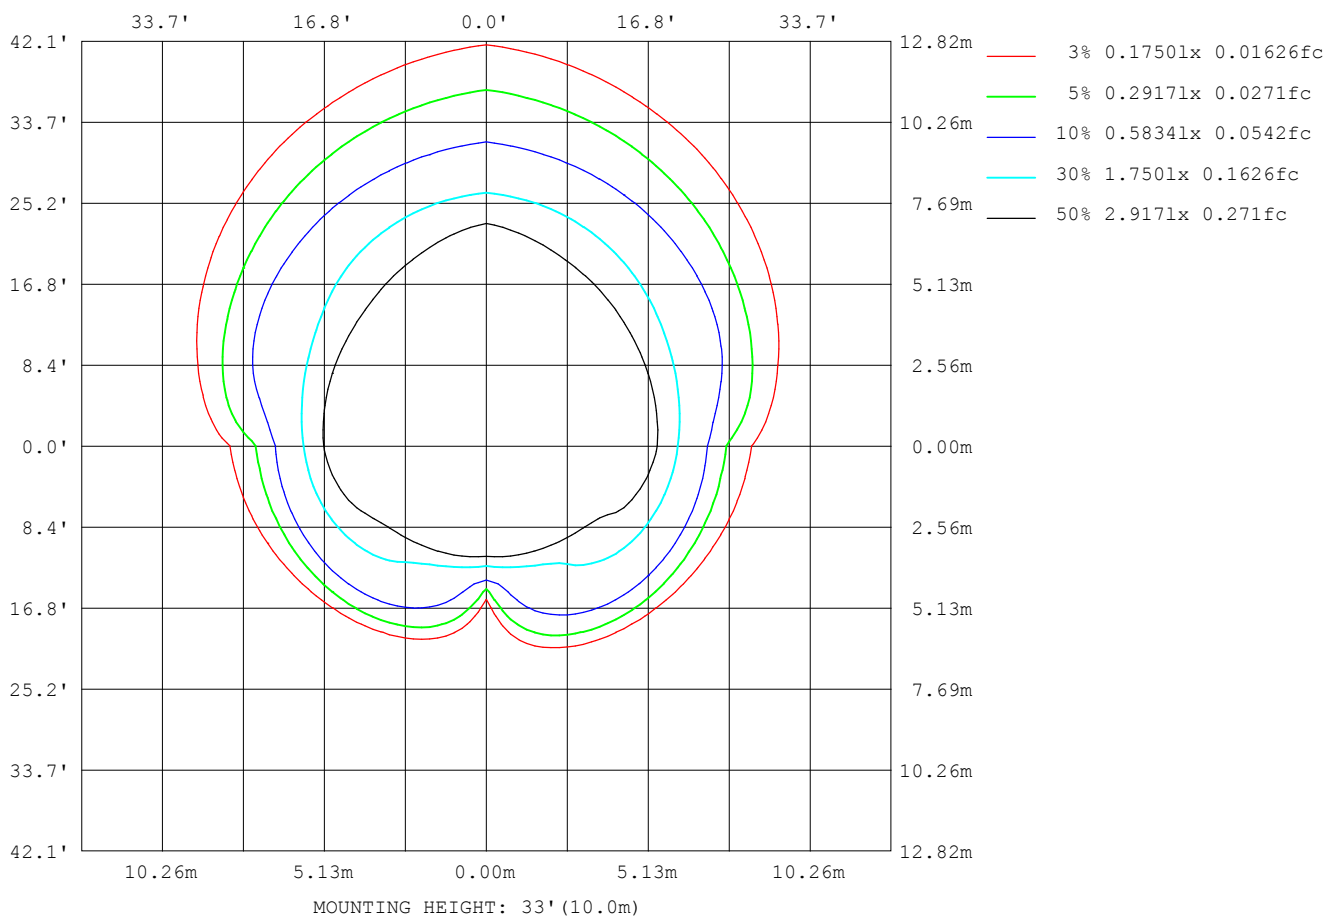

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

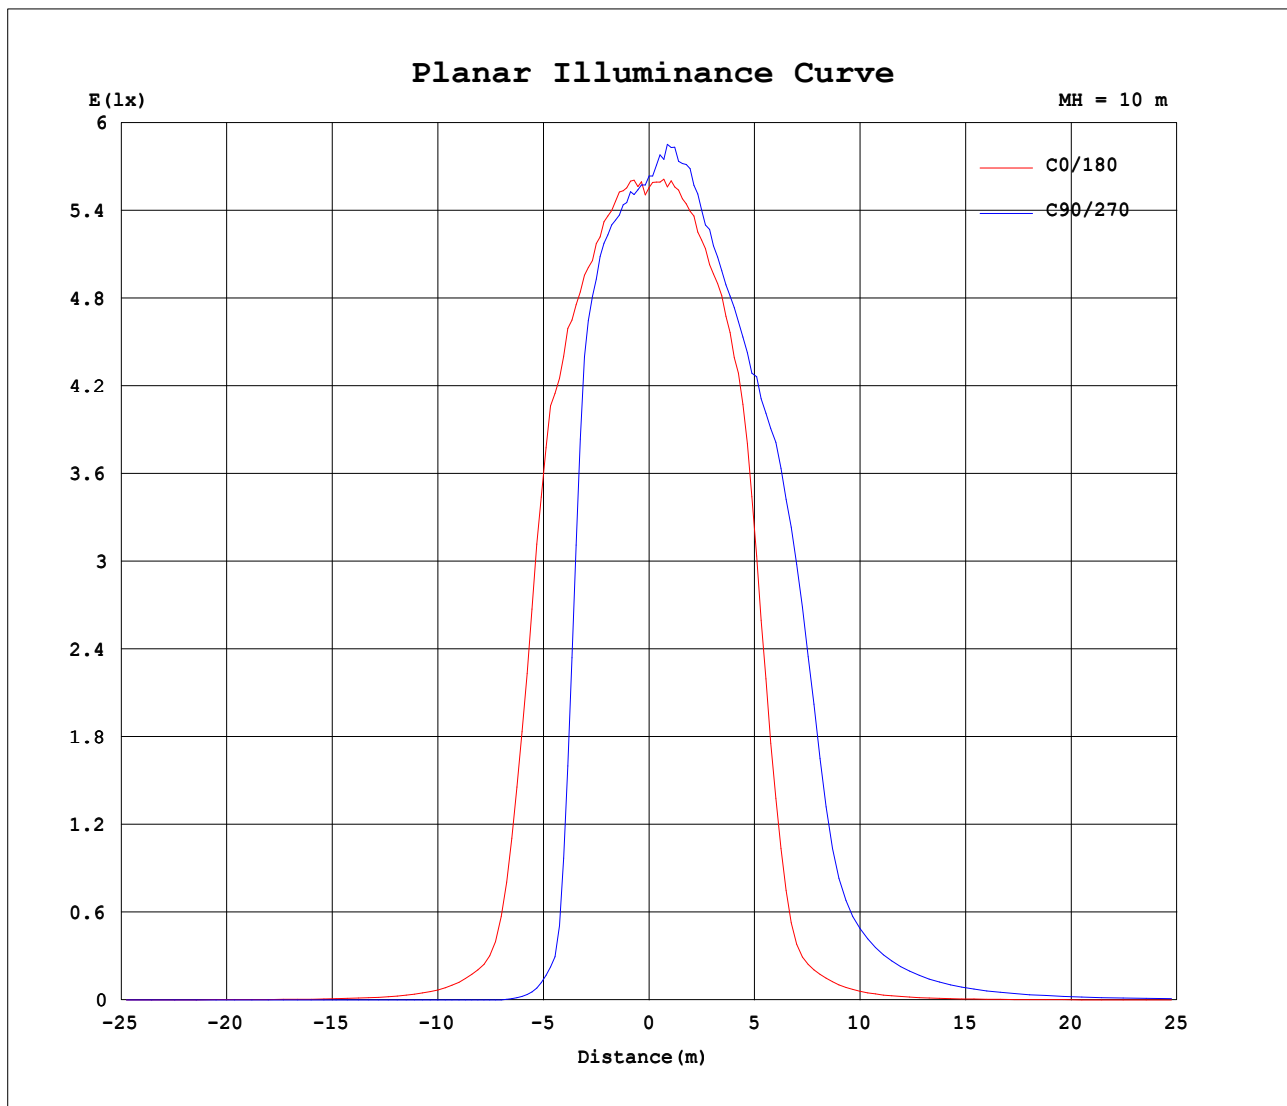


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.02V I:1.242A P:10.15W PF:0.6801 Freq:60.08Hz Lamp Flux:585.783x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:WITH SHROUD

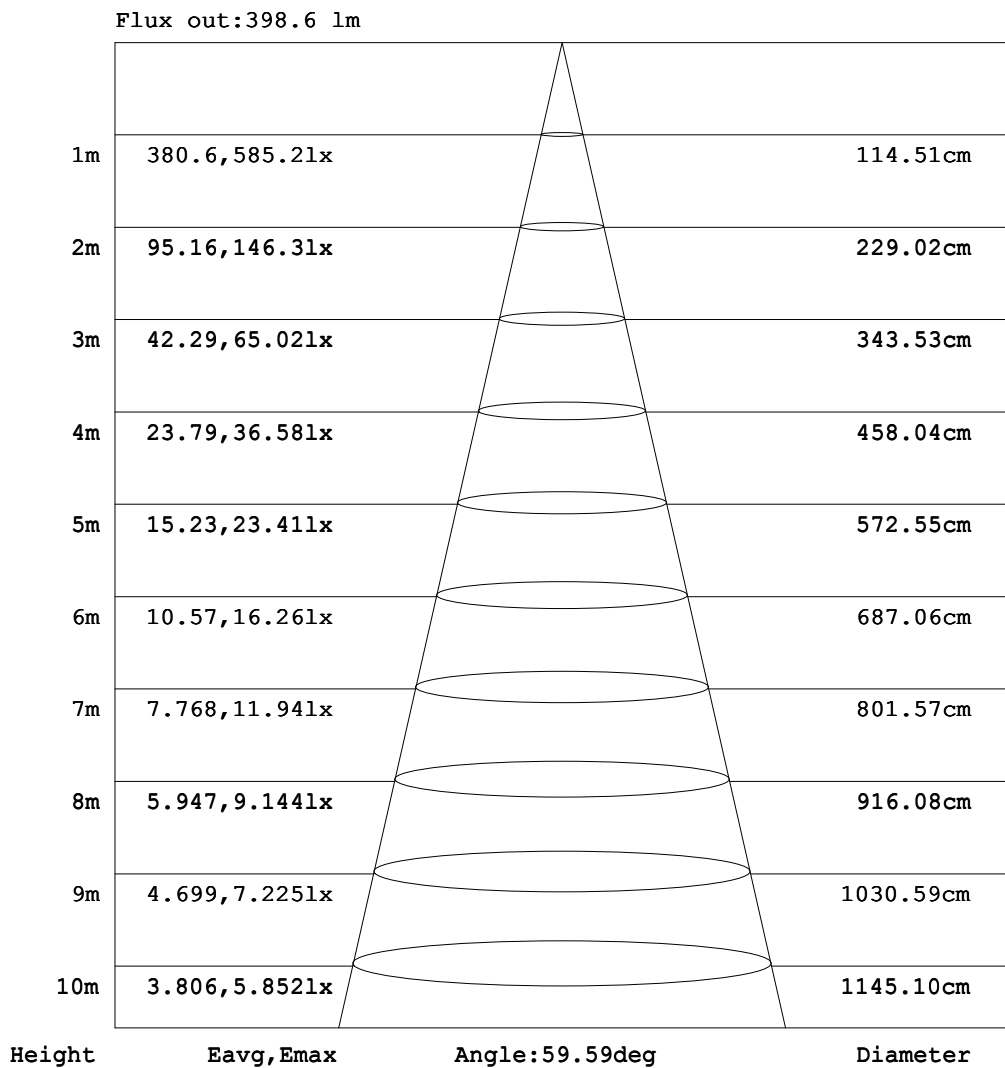

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.02V I:1.242A P:10.15W PF:0.6801 Freq:60.08Hz Lamp Flux:585.783x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:WITH SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.67	1.26	1.92	2.60	3.20	3.65	4.22	5.01	5.75	6.34	6.26
-170	0.00	0.00	0.00	0.00	0.02	0.04	0.09	0.31	0.80	1.44	2.15	2.89	3.58	4.13	4.74	5.59	6.46	7.12	7.62
-160	0.00	0.00	0.00	0.01	0.03	0.07	0.16	0.31	0.78	1.37	2.05	2.78	3.51	4.17	4.73	5.31	5.94	6.59	7.15
-150	0.00	0.00	0.00	0.01	0.03	0.08	0.18	0.32	0.61	1.11	1.69	2.33	2.99	3.64	4.24	4.79	5.25	5.65	6.00
-140	0.00	0.00	0.00	0.01	0.02	0.07	0.14	0.28	0.46	0.73	1.16	1.65	2.16	2.69	3.19	3.67	4.09	4.44	4.73
-130	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.17	0.30	0.47	0.69	0.94	1.28	1.63	1.98	2.31	2.60	2.86	3.06
-120	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.14	0.22	0.32	0.46	0.61	0.77	0.95	1.12	1.28	1.42	1.53
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.09	0.12	0.16	0.20	0.26	0.31	0.36	0.39	0.42
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.04	0.04	0.03	0.02	0.01	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.05	0.13	0.19	0.24	0.32	0.32	0.33	0.33	0.31	0.27	0.21	0.15	0.08	0.00
-60	0.00	0.00	0.00	0.01	0.15	0.29	0.45	0.56	0.68	0.79	0.85	0.87	0.87	0.81	0.72	0.58	0.41	0.21	0.00
-50	0.00	0.00	0.00	0.15	0.35	0.59	0.83	1.09	1.31	1.52	1.71	1.84	1.94	1.99	1.90	1.65	1.22	0.65	0.00
-40	0.00	0.00	0.02	0.28	0.58	0.94	1.34	1.76	2.21	2.74	3.45	4.28	5.17	5.97	6.44	6.21	4.97	2.79	0.00
-30	0.00	0.00	0.10	0.41	0.82	1.33	1.91	2.60	3.52	5.06	7.30	10.6	15.1	19.6	25.0	38.4	44.9	32.2	5.80
-20	0.00	0.00	0.16	0.58	1.04	1.70	2.50	3.60	5.52	8.85	14.8	24.7	40.9	114	202	237	241	284	282
-10	0.00	0.00	0.18	0.63	1.23	1.98	3.02	4.61	7.71	13.6	25.4	45.4	160	343	425	525	554	558	555
0	0.00	0.00	0.19	0.66	1.33	2.17	3.37	5.33	9.22	17.0	33.4	69.3	270	511	564	570	570	562	556
10	0.00	0.03	0.27	0.86	1.76	3.10	5.19	8.65	15.2	27.5	56.6	122	271	475	563	577	580	591	598
20	0.00	0.07	0.33	1.00	2.00	3.65	6.19	10.3	17.4	30.0	52.8	115	219	355	483	561	581	586	590
30	0.00	0.10	0.34	0.96	2.01	3.67	6.21	10.1	16.1	26.0	41.5	66.3	118	226	339	434	514	564	602
40	0.00	0.12	0.31	0.88	1.79	3.22	5.37	8.49	12.9	19.4	28.5	41.5	58.5	80.7	110	152	204	259	294
50	0.00	0.14	0.32	0.75	1.44	2.49	4.05	6.20	9.09	12.8	17.7	23.8	31.2	40.2	50.0	60.8	71.0	79.7	86.4
60	0.00	0.16	0.34	0.59	1.07	1.75	2.70	3.92	5.53	7.53	9.93	12.7	15.9	19.3	22.9	26.6	30.1	33.1	35.6
70	0.00	0.16	0.35	0.56	0.80	1.16	1.63	2.21	2.92	3.79	4.72	5.79	7.03	8.26	9.54	10.8	11.9	13.0	13.8
80	0.00	0.17	0.34	0.53	0.73	0.93	1.16	1.40	1.65	1.92	2.23	2.56	2.90	3.25	3.59	3.92	4.24	4.54	4.81
90	0.00	0.17	0.33	0.50	0.66	0.83	1.00	1.16	1.33	1.49	1.66	1.82	1.99	2.16	2.32	2.49	2.65	2.82	2.99
100	0.00	0.16	0.32	0.46	0.60	0.74	0.87	1.00	1.12	1.24	1.34	1.45	1.57	1.68	1.78	1.89	2.00	2.12	2.24
110	0.00	0.15	0.29	0.41	0.53	0.63	0.71	0.79	0.85	0.89	0.93	0.96	1.00	1.03	1.07	1.11	1.15	1.21	1.27
120	0.00	0.14	0.25	0.36	0.44	0.50	0.53	0.55	0.56	0.55	0.54	0.53	0.51	0.49	0.48	0.46	0.47	0.49	0.52
130	0.00	0.12	0.22	0.29	0.35	0.37	0.37	0.36	0.33	0.29	0.26	0.21	0.19	0.19	0.17	0.13	0.08	0.05	0.00
140	0.00	0.10	0.18	0.23	0.25	0.26	0.24	0.21	0.17	0.14	0.22	0.29	0.39	0.45	0.46	0.41	0.32	0.26	0.14
150	0.00	0.07	0.13	0.17	0.18	0.17	0.15	0.11	0.15	0.32	0.56	0.78	0.95	1.18	1.40	1.51	1.55	1.50	1.36
160	0.00	0.05	0.09	0.11	0.11	0.10	0.08	0.08	0.33	0.67	1.05	1.45	1.89	2.27	2.56	2.79	2.96	3.02	2.89
170	0.00	0.03	0.04	0.05	0.05	0.05	0.03	0.16	0.53	1.03	1.56	2.16	2.70	3.11	3.52	4.04	4.41	4.52	4.26
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.67	1.26	1.92	2.60	3.20	3.65	4.22	5.01	5.75	6.34	6.23

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.02V I:1.242A P:10.15W PF:0.6801 Freq:60.08Hz Lamp Flux:585.783x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:WITH SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	6.56	6.13	5.49	4.74	4.30	3.85	3.20	2.50	1.80	1.18	0.60	0.14	0.00	0.00	0.00	0.00	0.00	0.00	
-170	7.24	6.68	5.89	5.18	4.65	4.10	3.38	2.64	1.91	1.26	0.66	0.21	0.04	0.02	0.00	0.00	0.00	0.00	
-160	6.67	6.13	5.58	5.10	4.55	3.90	3.19	2.48	1.77	1.13	0.60	0.17	0.07	0.03	0.01	0.00	0.00	0.00	
-150	5.73	5.39	4.98	4.48	3.92	3.31	2.65	2.02	1.42	0.89	0.43	0.18	0.08	0.03	0.01	0.00	0.00	0.00	
-140	4.49	4.18	3.82	3.37	2.90	2.40	1.91	1.42	0.96	0.55	0.28	0.14	0.07	0.02	0.01	0.00	0.00	0.00	
-130	2.90	2.68	2.41	2.10	1.78	1.43	1.08	0.76	0.47	0.30	0.17	0.09	0.04	0.01	0.00	0.00	0.00	0.00	
-120	1.43	1.29	1.14	0.96	0.77	0.61	0.46	0.32	0.22	0.14	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	
-110	0.39	0.36	0.31	0.26	0.20	0.16	0.12	0.09	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.02	0.04	0.06	0.07	0.08	0.09	0.09	0.09	0.07	0.06	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.09	0.18	0.25	0.32	0.36	0.39	0.41	0.41	0.38	0.35	0.30	0.25	0.18	0.10	0.02	0.00	0.00	0.00	
-60	0.23	0.45	0.65	0.79	0.90	0.97	0.97	0.96	0.89	0.80	0.68	0.56	0.41	0.29	0.15	0.02	0.00	0.00	
-50	0.74	1.38	1.86	2.14	2.24	2.17	2.03	1.88	1.69	1.46	1.23	0.99	0.74	0.50	0.29	0.10	0.00	0.00	
-40	3.26	5.82	7.24	7.48	6.92	5.92	4.84	3.88	3.01	2.44	1.96	1.51	1.11	0.75	0.44	0.18	0.00	0.00	
-30	40.3	60.2	56.5	35.8	23.0	17.7	12.3	8.35	5.71	3.95	2.86	2.12	1.50	0.99	0.58	0.25	0.01	0.00	
-20	285	241	249	241	156	58.8	29.0	17.2	10.1	6.23	3.96	2.75	1.90	1.24	0.70	0.31	0.01	0.00	
-10	557	553	521	425	385	218	60.7	29.7	15.8	8.72	5.19	3.33	2.22	1.42	0.81	0.35	0.02	0.00	
0	567	565	561	560	546	344	104	39.1	19.8	10.4	5.98	3.70	2.42	1.53	0.86	0.37	0.02	0.00	
10	590	578	573	563	517	329	138	60.9	29.6	16.2	9.22	5.50	3.34	1.96	1.04	0.45	0.05	0.00	
20	586	581	574	522	397	237	120	55.2	31.2	18.2	10.7	6.44	3.85	2.19	1.13	0.49	0.08	0.00	
30	572	529	452	350	230	120	68.0	42.5	26.7	16.5	10.3	6.43	3.84	2.17	1.13	0.49	0.10	0.00	
40	259	205	153	111	81.7	59.3	42.1	28.9	19.7	13.2	8.69	5.54	3.39	1.95	1.03	0.47	0.12	0.00	
50	79.8	71.2	61.0	50.2	40.4	31.5	23.9	17.9	13.0	9.24	6.34	4.20	2.64	1.59	0.89	0.42	0.14	0.00	
60	33.2	30.2	26.7	23.0	19.4	16.0	12.8	10.0	7.63	5.65	4.04	2.81	1.87	1.22	0.73	0.36	0.16	0.00	
70	13.0	12.0	10.8	9.59	8.32	7.09	5.86	4.81	3.85	3.03	2.32	1.75	1.29	0.90	0.58	0.35	0.16	0.00	
80	4.55	4.26	3.95	3.62	3.29	2.96	2.63	2.31	2.00	1.71	1.44	1.17	0.94	0.73	0.53	0.34	0.17	0.00	
90	2.82	2.65	2.49	2.32	2.16	1.99	1.82	1.66	1.49	1.33	1.16	1.00	0.83	0.66	0.50	0.33	0.17	0.00	
100	2.12	2.00	1.89	1.78	1.68	1.57	1.45	1.34	1.24	1.12	1.00	0.87	0.74	0.60	0.46	0.32	0.16	0.00	
110	1.21	1.15	1.11	1.07	1.03	1.00	0.96	0.93	0.89	0.85	0.79	0.71	0.63	0.53	0.41	0.29	0.15	0.00	
120	0.50	0.49	0.48	0.48	0.49	0.51	0.53	0.54	0.55	0.56	0.55	0.53	0.50	0.44	0.36	0.25	0.14	0.00	
130	0.08	0.16	0.23	0.29	0.34	0.35	0.34	0.32	0.29	0.33	0.36	0.37	0.37	0.35	0.29	0.22	0.12	0.00	
140	0.31	0.42	0.55	0.64	0.66	0.63	0.55	0.48	0.37	0.26	0.21	0.24	0.26	0.25	0.23	0.18	0.10	0.00	
150	1.57	1.69	1.71	1.63	1.46	1.26	1.10	0.89	0.64	0.43	0.22	0.15	0.17	0.18	0.17	0.13	0.07	0.00	
160	3.10	3.14	3.07	2.92	2.65	2.28	1.86	1.47	1.07	0.68	0.37	0.09	0.10	0.11	0.11	0.09	0.05	0.00	
170	4.64	4.64	4.35	3.96	3.64	3.22	2.65	2.05	1.50	0.99	0.51	0.15	0.05	0.05	0.05	0.04	0.03	0.00	
180	6.56	6.13	5.49	4.74	4.30	3.85	3.20	2.50	1.80	1.18	0.60	0.14	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: