

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity		413.8 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal

Beam Spread	At 10% of Imax	149.8V x 150.8H
	At 50% of Imax	97.6V x 100.5H
	At 90% of Imax	49.2V x 53.1H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	970.4 lumens per klm.
	To 50% of Imax	691.4 lumens per klm.
	To 90% of Imax	224.0 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.4 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-08-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.10V I:0.4478A P:3.426W PF:0.6325 Freq:59.98Hz Lamp Flux:166.24x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light CW	WEIGHT:
SPEC.:3.5W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

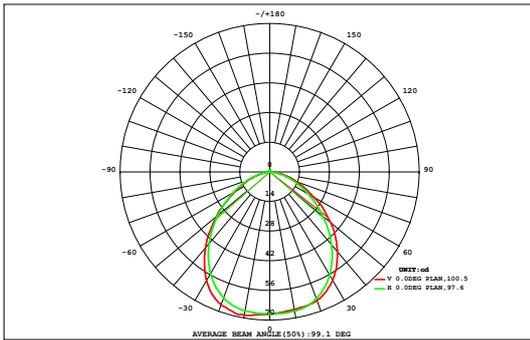

DATA OF LAMP		Eff:48.53lm/W	
MODEL	W7A5-3.5W-BK	Imax (cd)	68.80
NOMINAL POWER (W)	3.5	AVAILABILITY (%)	97.0
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	161.3
NOMINAL FLUX (lm)	166.24	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	166.2
TEST VOLTAGE (V)	12	θ @50% (H,V)	100,98DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm		Φ t	Φ a	
	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.01	0.00			0.00
90	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.26	0.00
80	0.00	0.00	0.01	0.03	0.07	0.11	0.15	0.18	0.21	0.21	0.20	0.18	0.14	0.10	0.06	0.03	0.01	0.00	1.71	0.72
70	0.00	0.01	0.04	0.09	0.17	0.26	0.35	0.42	0.47	0.47	0.44	0.38	0.30	0.21	0.13	0.06	0.02	0.00	3.85	3.57
60	0.00	0.01	0.07	0.16	0.29	0.45	0.60	0.72	0.79	0.80	0.75	0.64	0.50	0.34	0.21	0.10	0.03	0.00	6.48	6.34
50	0.00	0.02	0.10	0.24	0.43	0.66	0.89	1.07	1.17	1.18	1.10	0.94	0.72	0.49	0.28	0.14	0.04	0.00	9.47	9.39
40	0.00	0.03	0.13	0.31	0.57	0.88	1.19	1.42	1.53	1.54	1.43	1.22	0.94	0.64	0.36	0.17	0.06	0.01	12.4	12.4
30	0.00	0.04	0.16	0.37	0.70	1.08	1.44	1.71	1.83	1.82	1.70	1.46	1.13	0.77	0.44	0.20	0.06	0.01	14.9	14.9
20	0.00	0.04	0.17	0.42	0.80	1.23	1.63	1.89	1.99	1.98	1.86	1.62	1.26	0.87	0.50	0.22	0.07	0.01	16.6	16.5
10	0.00	0.05	0.18	0.45	0.85	1.31	1.73	1.98	2.05	2.02	1.92	1.70	1.34	0.93	0.53	0.23	0.07	0.01	17.3	17.3
0	0.00	0.05	0.18	0.45	0.85	1.31	1.73	1.98	2.04	2.02	1.92	1.70	1.34	0.92	0.53	0.23	0.07	0.01	17.3	17.3
-10	0.00	0.04	0.17	0.42	0.79	1.23	1.62	1.88	1.99	1.97	1.86	1.61	1.26	0.87	0.50	0.22	0.07	0.01	16.5	16.5
-20	0.00	0.04	0.15	0.37	0.69	1.08	1.43	1.69	1.81	1.81	1.69	1.45	1.12	0.77	0.44	0.20	0.06	0.01	14.8	14.8
-30	0.00	0.03	0.13	0.30	0.56	0.87	1.17	1.40	1.51	1.52	1.42	1.21	0.93	0.63	0.36	0.17	0.06	0.01	12.3	12.2
-40	0.00	0.02	0.10	0.23	0.42	0.65	0.88	1.05	1.14	1.15	1.08	0.92	0.71	0.48	0.28	0.14	0.04	0.00	9.32	9.23
-50	0.00	0.01	0.07	0.16	0.29	0.44	0.59	0.71	0.77	0.78	0.74	0.63	0.49	0.34	0.20	0.10	0.03	0.00	6.34	6.20
-60	0.00	0.01	0.04	0.09	0.17	0.26	0.34	0.41	0.45	0.46	0.43	0.37	0.30	0.21	0.13	0.06	0.02	0.00	3.74	3.45
-70	0.00	0.00	0.01	0.03	0.07	0.11	0.14	0.18	0.20	0.20	0.19	0.17	0.14	0.10	0.06	0.03	0.01	0.00	1.64	0.64
-80	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.24	0.00
-90	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.24	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.02	0.41	1.70	4.12	7.72	12.0	15.9	18.7	20.0	20.0	18.8	16.3	12.7	8.71	5.04	2.33	0.75	0.08	165	---
Φ a	0.00	0.11	1.44	3.88	7.49	11.7	15.7	18.5	19.8	19.8	18.6	16.0	12.5	8.49	4.81	2.09	0.45	0.00	---	161


one-half-peak spread: U:49.8,D:43.4 , L:36.9,R:38.2 NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-08-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.10V I:0.4478A P:3.426W PF:0.6325 Freq:59.98Hz Lamp Flux:166.24x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light CW	WEIGHT:
SPEC.:3.5W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

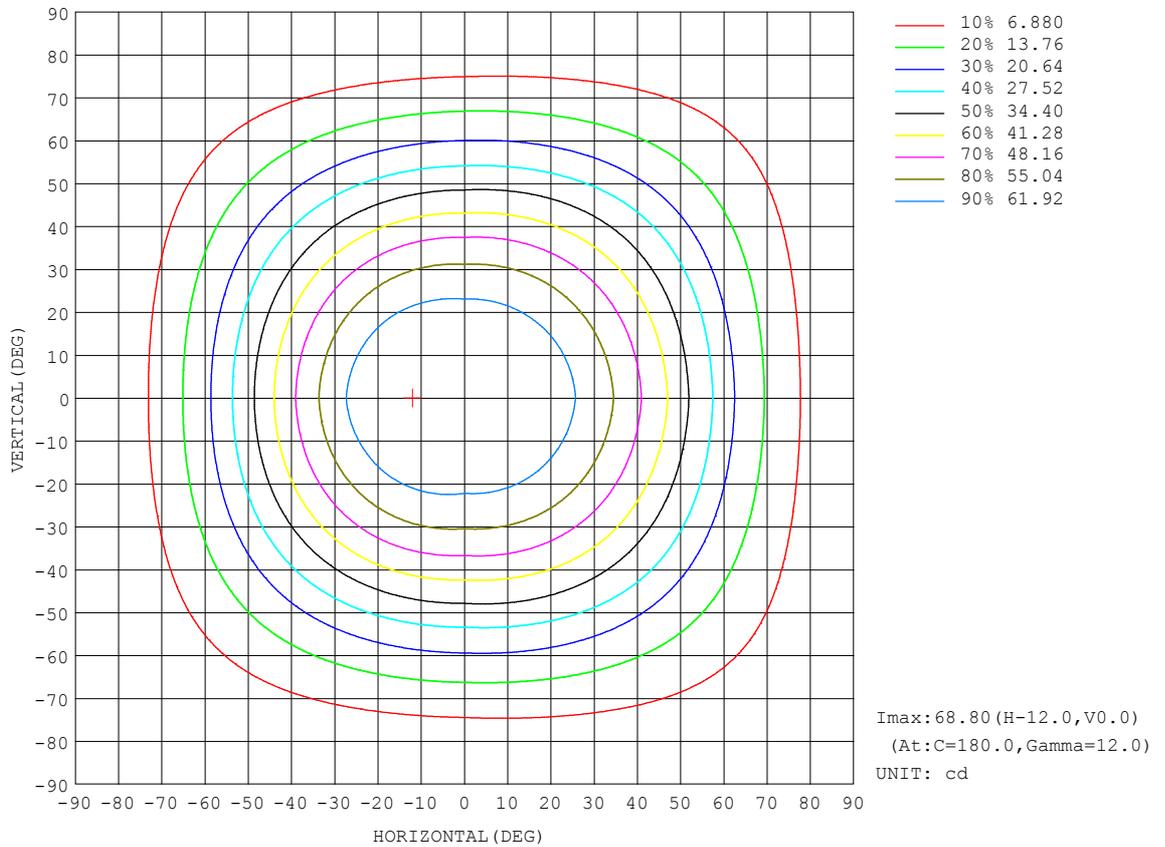


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-08-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.10V I:0.4478A P:3.426W PF:0.6325 Freq:59.98Hz Lamp Flux:166.24x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light CW	WEIGHT:
SPEC.:3.5W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

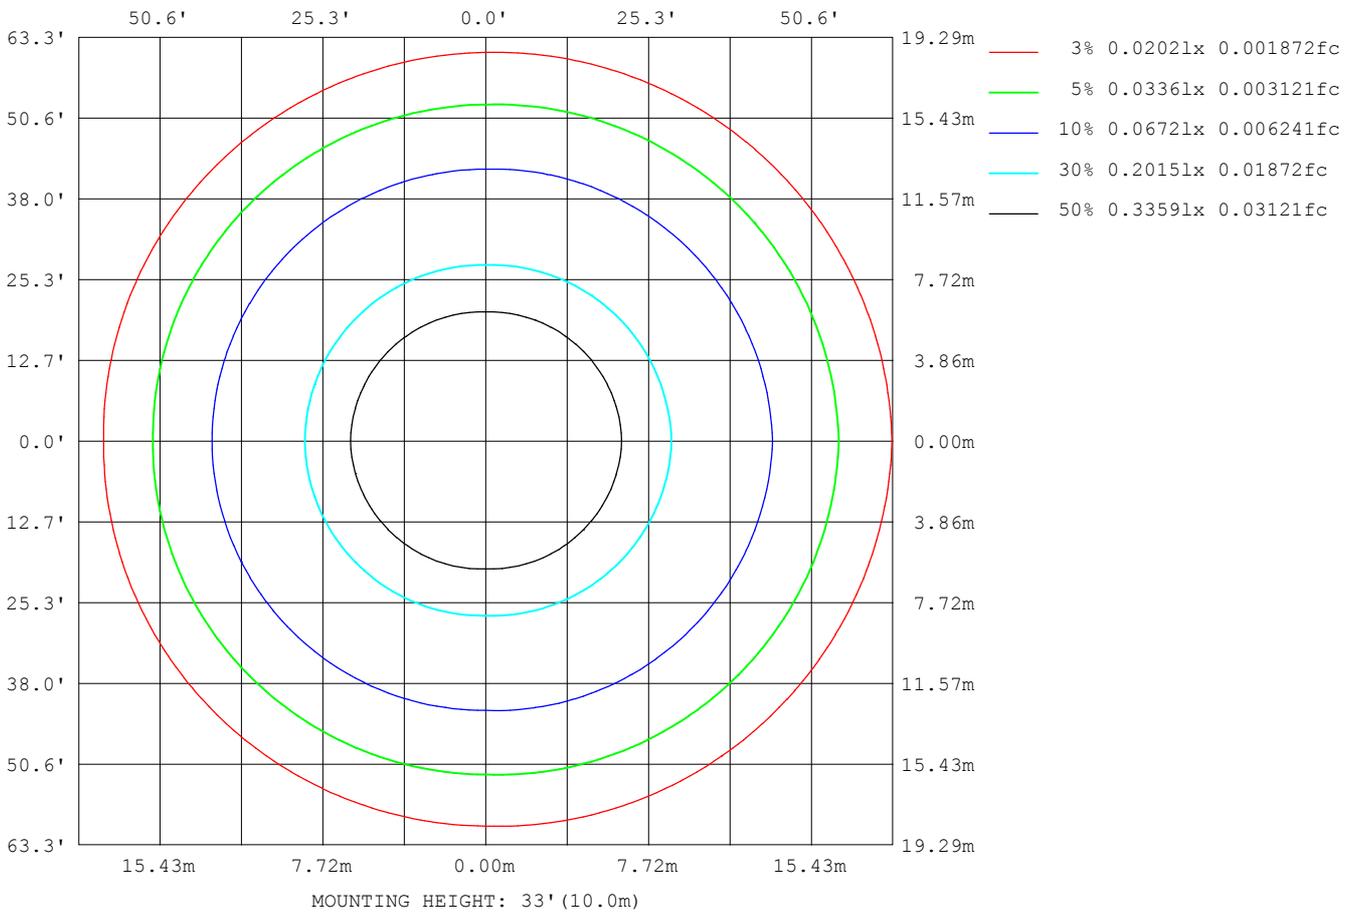

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-08-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

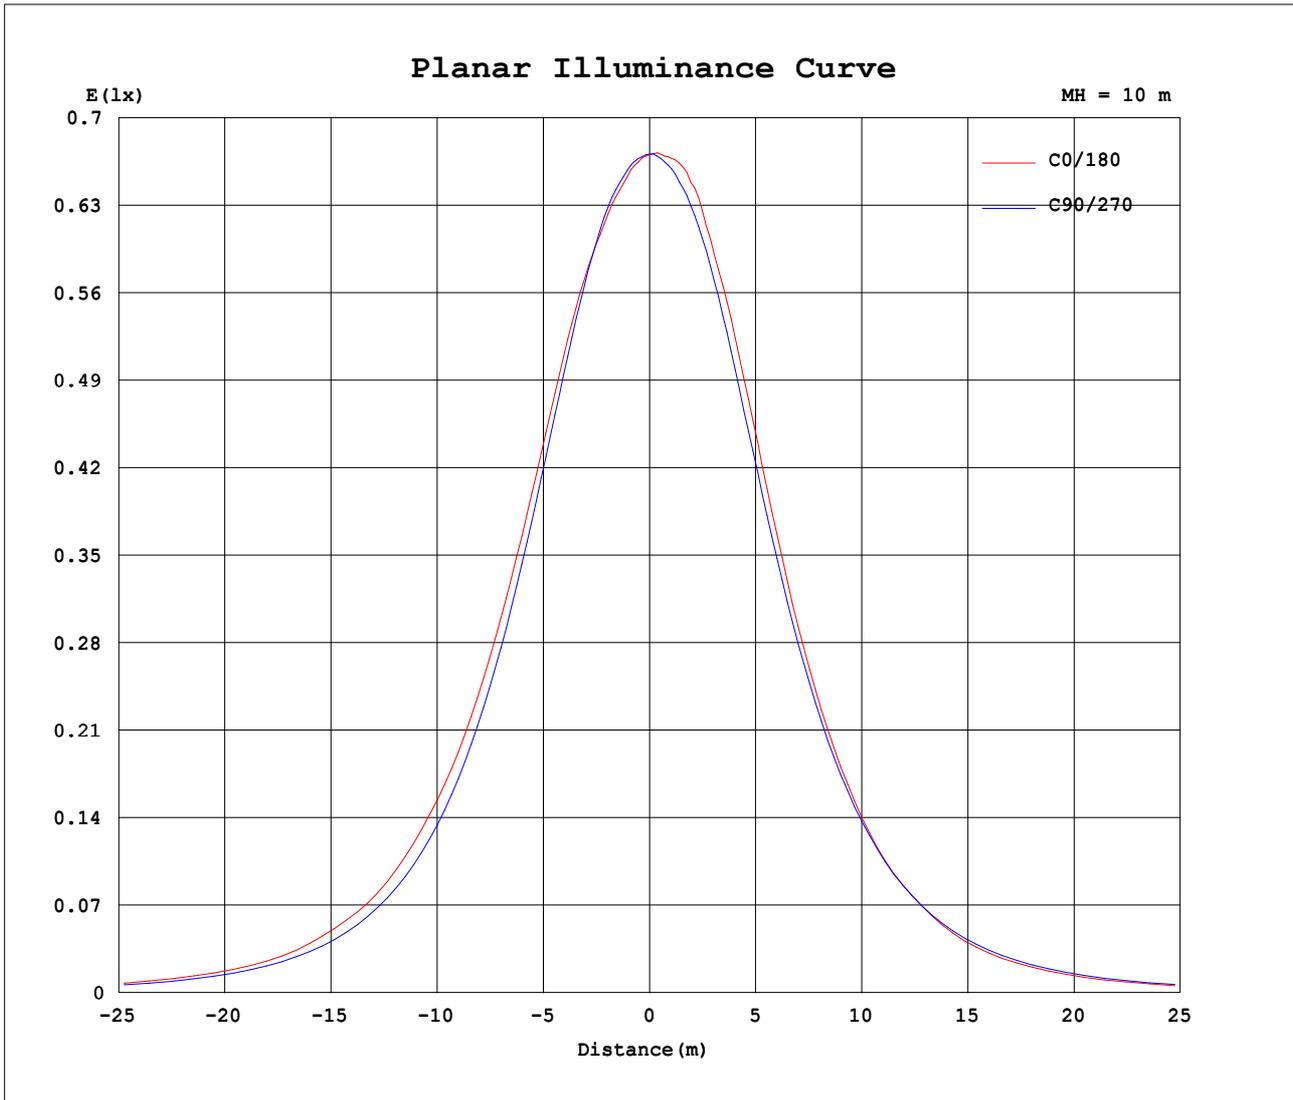


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-08-08

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

AAI Figure

Test:U:12.10V I:0.4478A P:3.426W PF:0.6325 Freq:59.98Hz Lamp Flux:166.24x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light CW	WEIGHT:
SPEC.:3.5W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

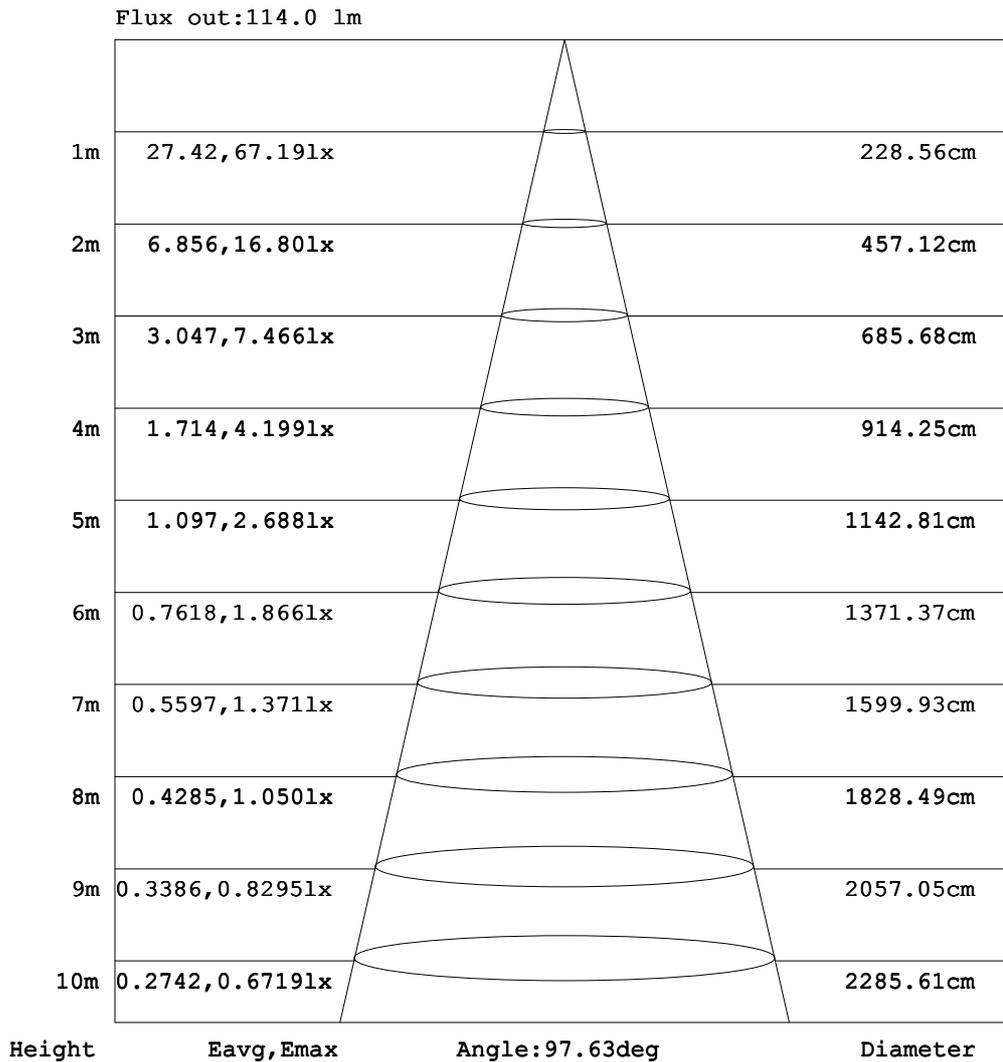

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-08-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.10V I:0.4478A P:3.426W PF:0.6325 Freq:59.98Hz Lamp Flux:166.24x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light CW	WEIGHT:
SPEC.:3.5W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) \ V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.12	0.19	0.25	0.31	0.37	0.40	0.46	0.51	0.55	0.58	0.61	0.63
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.12	0.19	0.25	0.31	0.37	0.41	0.46	0.50	0.54	0.59	0.60	0.62
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.11	0.18	0.22	0.28	0.33	0.39	0.43	0.45	0.49	0.53	0.55	0.56
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.13	0.19	0.23	0.28	0.32	0.36	0.40	0.43	0.45	0.47	0.48
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.13	0.16	0.21	0.24	0.28	0.31	0.34	0.35	0.37	0.38
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.06	0.09	0.12	0.15	0.17	0.21	0.22	0.24	0.26	0.27
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.03	0.05	0.07	0.08	0.10	0.11	0.12	0.12
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.01	0.09	0.30	0.56	0.85	1.15	1.47	1.78	2.08	2.36	2.60	2.80	2.96	3.08	3.15
-70	0.00	0.00	0.01	0.27	0.85	1.59	2.44	3.34	4.28	5.23	6.16	6.99	7.77	8.49	9.13	9.64	10.0	10.3	10.4
-60	0.00	0.00	0.23	1.10	2.33	3.77	5.39	7.04	8.75	10.5	12.1	13.7	15.2	16.5	17.7	18.7	19.4	19.8	20.0
-50	0.00	0.00	0.67	2.13	4.03	6.23	8.61	11.1	13.7	16.3	19.0	21.6	24.0	26.4	28.4	29.9	31.0	31.5	31.7
-40	0.00	0.00	1.14	3.16	5.75	8.65	11.8	15.2	18.8	22.7	26.8	30.8	34.1	37.3	40.0	42.0	43.4	44.2	44.3
-30	0.00	0.07	1.59	4.10	7.25	10.8	14.7	19.0	23.8	29.5	34.3	39.3	43.9	47.7	50.8	53.2	54.8	55.5	55.5
-20	0.00	0.14	1.95	4.84	8.42	12.5	17.0	22.3	28.7	34.5	40.9	46.6	51.7	56.0	59.4	61.7	63.0	63.5	63.2
-10	0.00	0.19	2.17	5.32	9.16	13.5	18.5	24.5	31.6	38.2	45.2	51.4	57.0	61.5	64.5	66.2	67.1	67.1	66.7
0	0.00	0.20	2.24	5.46	9.38	13.9	19.0	25.3	32.6	39.7	46.9	53.4	59.3	63.9	66.7	68.1	68.7	67.7	67.0
10	0.00	0.19	2.18	5.33	9.18	13.6	18.6	24.6	31.7	38.3	45.3	51.5	57.1	61.7	64.7	66.3	67.3	67.2	66.8
20	0.00	0.15	1.96	4.86	8.46	12.5	17.1	22.4	28.8	34.7	41.1	46.8	51.9	56.3	59.7	62.0	63.4	63.9	63.8
30	0.00	0.08	1.60	4.13	7.30	10.9	14.8	19.1	24.0	29.7	34.6	39.6	44.2	48.1	51.3	53.7	55.3	56.1	56.2
40	0.00	0.01	1.16	3.19	5.79	8.73	12.0	15.3	19.0	22.9	27.1	31.2	34.5	37.8	40.6	42.7	44.1	44.8	45.0
50	0.00	0.00	0.69	2.15	4.08	6.31	8.74	11.3	13.9	16.6	19.3	21.9	24.5	26.9	28.9	30.5	31.7	32.3	32.6
60	0.00	0.00	0.24	1.14	2.37	3.84	5.47	7.18	8.94	10.7	12.4	14.0	15.5	16.9	18.2	19.2	19.9	20.4	20.7
70	0.00	0.00	0.01	0.30	0.90	1.64	2.51	3.45	4.41	5.38	6.32	7.22	8.05	8.82	9.48	10.0	10.5	10.8	10.9
80	0.00	0.00	0.00	0.00	0.03	0.14	0.36	0.64	0.95	1.27	1.60	1.92	2.23	2.51	2.76	2.97	3.14	3.27	3.36
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.04	0.06	0.08	0.11	0.13	0.14	0.14	0.13
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.10	0.16	0.18	0.18	0.20	0.21	0.23	0.25	0.25
150	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.09	0.15	0.19	0.21	0.25	0.29	0.31	0.33	0.33	0.33	0.33
160	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.15	0.19	0.24	0.29	0.34	0.36	0.40	0.44	0.45	0.45	0.44
170	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.11	0.18	0.23	0.29	0.34	0.38	0.43	0.47	0.48	0.56	0.58	0.59
180	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.12	0.19	0.25	0.31	0.37	0.40	0.46	0.51	0.55	0.58	0.61	0.63

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-08-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.10V I:0.4478A P:3.426W PF:0.6325 Freq:59.98Hz Lamp Flux:166.24x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Wall Light CW	WEIGHT:
SPEC.:3.5W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) \ V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.63	0.62	0.58	0.55	0.45	0.45	0.42	0.32	0.28	0.23	0.13	0.12	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.61	0.60	0.57	0.51	0.46	0.46	0.40	0.32	0.28	0.21	0.13	0.10	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.56	0.53	0.49	0.47	0.46	0.41	0.34	0.29	0.28	0.17	0.13	0.04	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.48	0.47	0.45	0.42	0.38	0.33	0.29	0.28	0.19	0.14	0.12	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.37	0.36	0.34	0.32	0.29	0.28	0.22	0.16	0.14	0.11	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.26	0.25	0.22	0.21	0.18	0.15	0.14	0.11	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.12	0.12	0.10	0.07	0.06	0.05	0.03	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	3.25	3.30	3.30	3.26	3.17	3.03	2.84	2.61	2.35	2.09	1.80	1.48	1.18	0.91	0.67	0.43	0.19	0.00
-70	10.5	10.5	10.3	10.0	9.59	9.07	8.50	7.83	7.04	6.20	5.34	4.49	3.59	2.66	1.79	1.04	0.45	0.00
-60	20.1	19.9	19.5	18.8	17.9	16.7	15.5	14.0	12.5	11.0	9.45	7.87	6.26	4.74	3.23	1.82	0.73	0.00
-50	31.9	31.6	30.8	29.6	28.2	26.4	24.0	21.3	18.8	16.3	13.8	11.4	9.10	6.79	4.70	2.69	1.02	0.00
-40	44.4	43.8	42.7	41.1	39.0	36.3	33.1	29.7	26.1	21.9	18.2	14.9	11.7	8.82	6.01	3.50	1.30	0.00
-30	55.5	54.8	53.4	51.3	48.6	45.3	41.6	37.4	32.5	28.1	22.6	18.1	14.1	10.5	7.18	4.22	1.57	0.00
-20	63.1	62.5	61.1	58.9	56.0	52.5	48.2	43.5	38.3	32.3	26.9	20.8	16.1	11.9	8.13	4.76	1.78	0.00
-10	66.3	65.7	64.9	63.2	60.5	57.0	52.5	47.4	42.0	35.6	29.7	22.7	17.4	12.8	8.77	5.11	1.91	0.00
0	66.6	66.0	65.5	64.6	62.4	59.0	54.6	49.3	43.6	37.2	30.8	23.6	18.0	13.2	9.04	5.25	1.97	0.00
10	66.4	65.8	65.1	63.4	60.7	57.1	52.7	47.5	42.1	35.7	29.7	22.8	17.4	12.8	8.78	5.11	1.91	0.00
20	63.5	62.8	61.4	59.2	56.3	52.7	48.4	43.7	38.5	32.5	27.0	20.9	16.1	11.9	8.15	4.77	1.78	0.00
30	56.1	55.3	53.9	51.8	49.0	45.7	41.9	37.7	32.7	28.2	22.7	18.2	14.2	10.6	7.20	4.23	1.57	0.00
40	45.1	44.5	43.4	41.7	39.5	36.8	33.5	30.0	26.4	22.1	18.4	15.0	11.8	8.86	6.05	3.52	1.31	0.00
50	32.7	32.3	31.5	30.2	28.7	26.8	24.3	21.6	19.0	16.5	13.9	11.5	9.18	6.84	4.73	2.71	1.02	0.00
60	20.7	20.5	20.0	19.2	18.3	17.1	15.8	14.3	12.8	11.2	9.60	7.96	6.33	4.78	3.26	1.83	0.73	0.00
70	11.0	10.9	10.7	10.4	9.92	9.35	8.73	7.99	7.19	6.33	5.45	4.55	3.65	2.71	1.81	1.04	0.45	0.00
80	3.44	3.48	3.47	3.42	3.32	3.17	2.98	2.75	2.47	2.19	1.88	1.54	1.22	0.93	0.67	0.43	0.19	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.14	0.14	0.13	0.11	0.08	0.06	0.06	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.25	0.24	0.21	0.21	0.20	0.21	0.16	0.10	0.08	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.34	0.34	0.35	0.33	0.31	0.26	0.23	0.23	0.15	0.10	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.46	0.46	0.43	0.42	0.39	0.36	0.30	0.25	0.25	0.14	0.11	0.03	0.00	0.00	0.00	0.00	0.00	0.00
170	0.58	0.57	0.52	0.48	0.44	0.43	0.37	0.30	0.26	0.20	0.12	0.09	0.00	0.00	0.00	0.00	0.00	0.00
180	0.63	0.62	0.58	0.55	0.45	0.45	0.42	0.32	0.28	0.23	0.13	0.12	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-08-08

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: