

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	338.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of I _{max}	165.0V x 171.5H
	At 50% of I _{max}	114.3V x 114.7H
	At 90% of I _{max}	35.7V x 38.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of I _{max}	986.5 lumens per klm.
	To 50% of I _{max}	708.8 lumens per klm.
	To 90% of I _{max}	103.3 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.4 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.01V I:0.4738A P:3.784W PF:0.6649 Freq:59.98Hz Lamp Flux:217.912x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path Light	WEIGHT:
SPEC.:4W 3000K Max beam angle	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-041

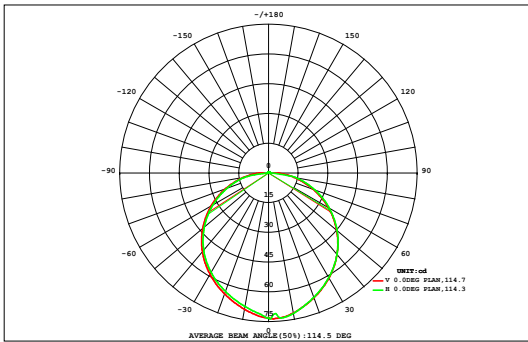

DATA OF LAMP		Eff:57.58lm/W	
MODEL	A6B1-4W-30K-A	Imax (cd)	73.70
NOMINAL POWER (W)	4	AVAILABILITY (%)	98.3
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	214.3
NOMINAL FLUX (lm)	217.912	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	217.9
TEST VOLTAGE (V)	12	θ @50% (H, V)	115,114DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.03	0.05	0.07	0.09	0.11	0.13	0.14	0.14	0.14	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.01		
90	0.01	0.03	0.05	0.07	0.09	0.11	0.13	0.14	0.14	0.14	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.01	1.54	0.68
80	0.01	0.05	0.11	0.19	0.30	0.39	0.48	0.55	0.58	0.58	0.55	0.49	0.40	0.30	0.20	0.11	0.05	0.01	5.35	5.16
70	0.01	0.07	0.17	0.30	0.45	0.61	0.74	0.85	0.90	0.91	0.85	0.75	0.61	0.46	0.31	0.18	0.07	0.02	8.27	8.22
60	0.02	0.09	0.22	0.40	0.60	0.81	0.99	1.13	1.21	1.22	1.14	1.01	0.82	0.61	0.41	0.23	0.09	0.02	11.0	11.0
50	0.02	0.11	0.27	0.49	0.74	0.99	1.22	1.39	1.49	1.49	1.40	1.24	1.01	0.75	0.50	0.27	0.11	0.02	13.5	13.5
40	0.02	0.12	0.31	0.56	0.85	1.15	1.41	1.61	1.73	1.73	1.63	1.43	1.17	0.87	0.57	0.31	0.13	0.02	15.6	15.6
30	0.02	0.13	0.34	0.62	0.94	1.27	1.56	1.79	1.92	1.93	1.81	1.59	1.30	0.96	0.63	0.35	0.14	0.02	17.3	17.3
20	0.02	0.14	0.36	0.66	1.00	1.35	1.66	1.91	2.08	2.09	1.95	1.70	1.38	1.03	0.68	0.37	0.14	0.03	18.5	18.5
10	0.03	0.14	0.37	0.67	1.03	1.38	1.71	1.98	2.17	2.19	2.03	1.76	1.43	1.06	0.70	0.38	0.15	0.03	19.2	19.2
0	0.02	0.14	0.37	0.67	1.02	1.38	1.70	1.96	2.13	2.15	2.01	1.75	1.42	1.06	0.69	0.38	0.15	0.03	19.0	19.0
-10	0.02	0.14	0.35	0.65	0.99	1.33	1.64	1.87	2.00	2.01	1.90	1.67	1.37	1.02	0.67	0.37	0.14	0.03	18.2	18.2
-20	0.02	0.13	0.33	0.61	0.92	1.24	1.52	1.73	1.84	1.85	1.75	1.55	1.27	0.95	0.62	0.34	0.14	0.02	16.9	16.8
-30	0.02	0.12	0.30	0.55	0.83	1.12	1.37	1.55	1.65	1.65	1.57	1.39	1.14	0.85	0.56	0.31	0.12	0.02	15.1	15.1
-40	0.02	0.11	0.26	0.47	0.71	0.96	1.17	1.33	1.41	1.42	1.34	1.19	0.97	0.73	0.48	0.27	0.11	0.02	13.0	12.9
-50	0.02	0.09	0.21	0.38	0.58	0.77	0.94	1.07	1.13	1.14	1.08	0.95	0.78	0.59	0.39	0.22	0.09	0.02	10.4	10.4
-60	0.01	0.07	0.16	0.29	0.43	0.57	0.69	0.78	0.83	0.83	0.78	0.70	0.57	0.43	0.29	0.17	0.07	0.02	7.69	7.63
-70	0.01	0.05	0.10	0.18	0.27	0.36	0.43	0.49	0.51	0.51	0.49	0.44	0.36	0.27	0.18	0.10	0.05	0.01	4.80	4.56
-80	0.01	0.03	0.05	0.06	0.08	0.09	0.10	0.10	0.10	0.10	0.10	0.10	0.09	0.08	0.07	0.05	0.03	0.01	1.26	0.35
-90	0.01	0.03	0.05	0.06	0.08	0.09	0.10	0.10	0.10	0.10	0.10	0.10	0.09	0.08	0.07	0.05	0.03	0.01	1.26	0.35
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.33	1.76	4.32	7.81	11.8	15.9	19.5	22.2	23.8	23.9	22.5	19.8	16.2	12.1	8.03	4.45	1.81	0.35	217	---
Φ a	0.19	1.58	4.15	7.65	11.7	15.7	19.4	22.1	23.7	23.9	22.4	19.7	16.1	12.0	7.87	4.28	1.65	0.21	---	214


one-half-peak spread: U:56.6,D:53.9 , L:56.1,R:56.3 NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.01V I:0.4738A P:3.784W PF:0.6649 Freq:59.98Hz Lamp Flux:217.912x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path Light	WEIGHT:
SPEC.:4W 3000K Max beam angle	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-041

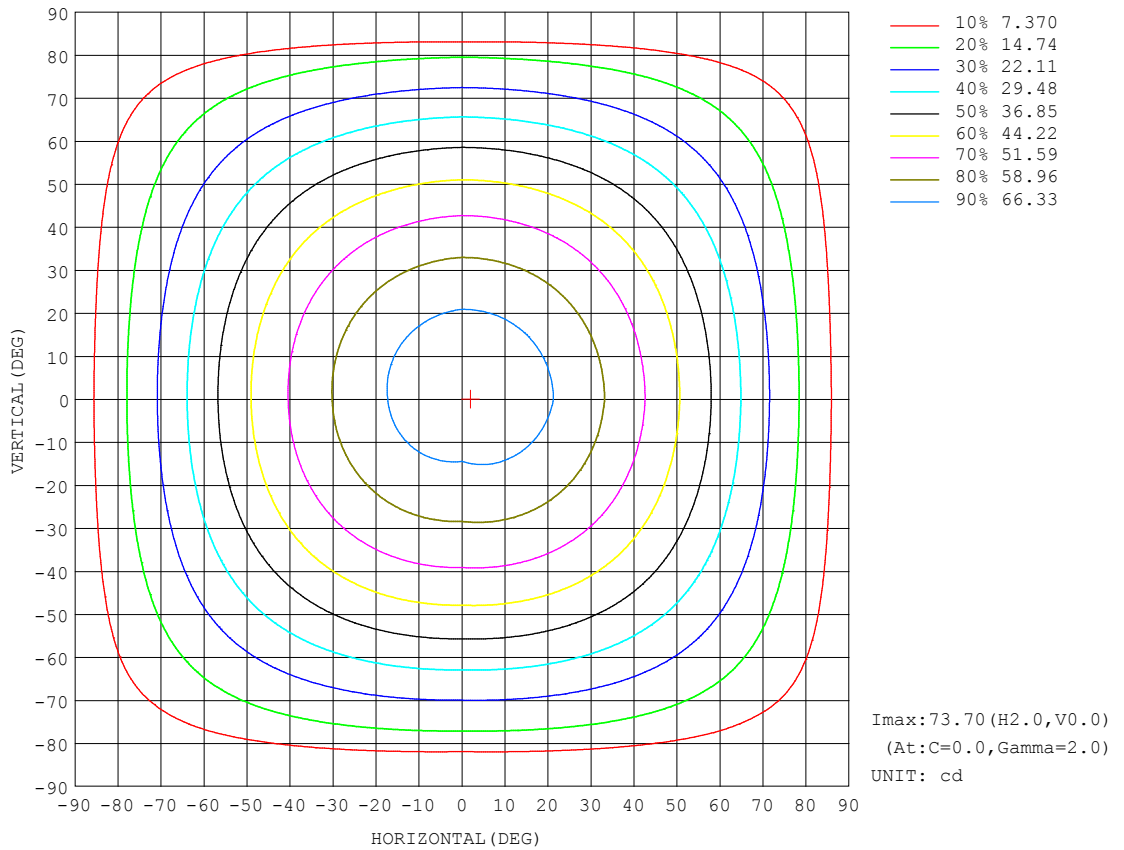


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2022-10-14

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:12.01V I:0.4738A P:3.784W PF:0.6649 Freq:59.98Hz Lamp Flux:217.912x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path Light	WEIGHT:
SPEC.:4W 3000K Max beam angle	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-041

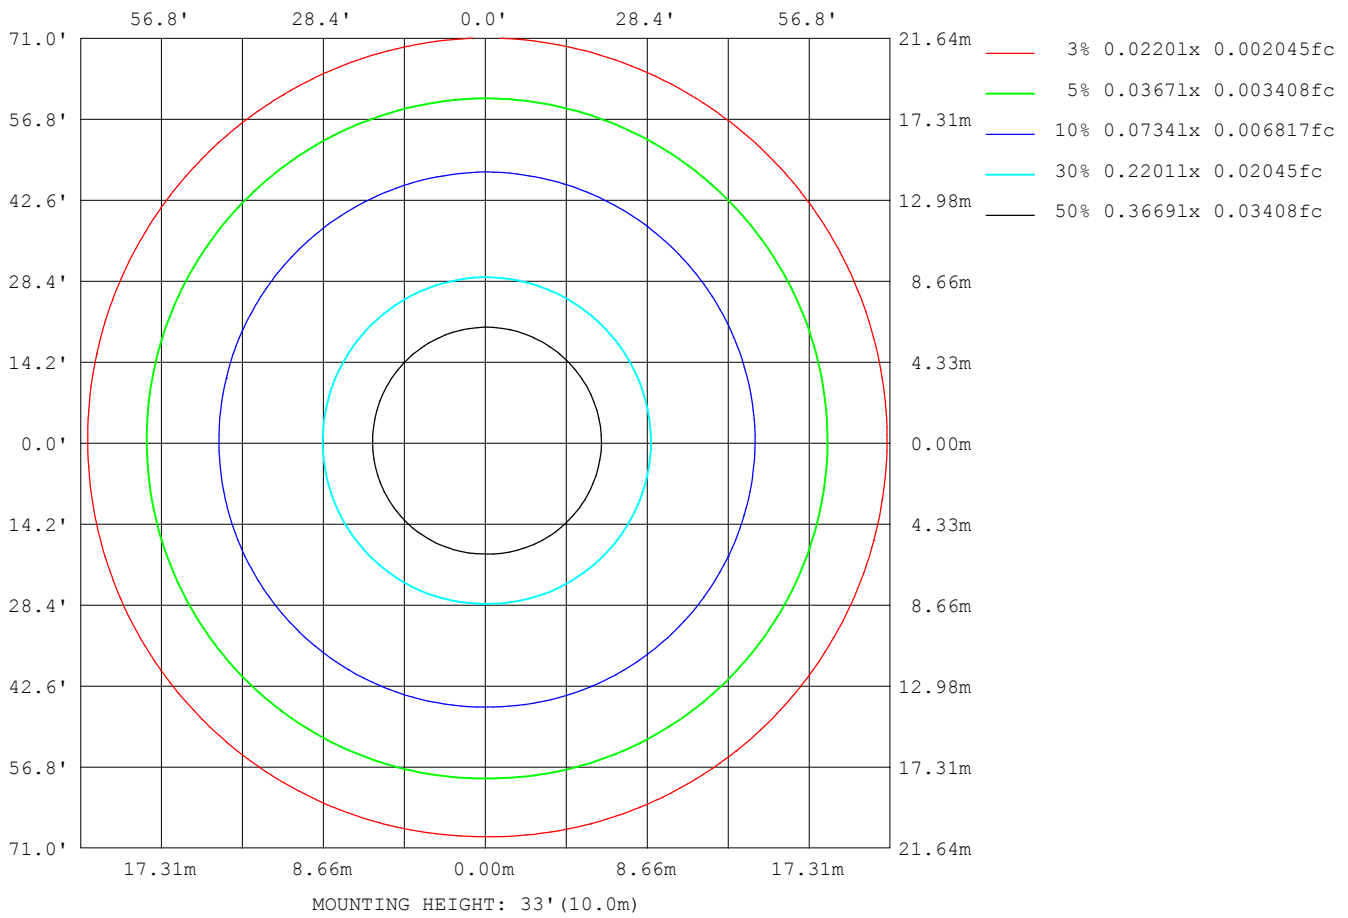

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

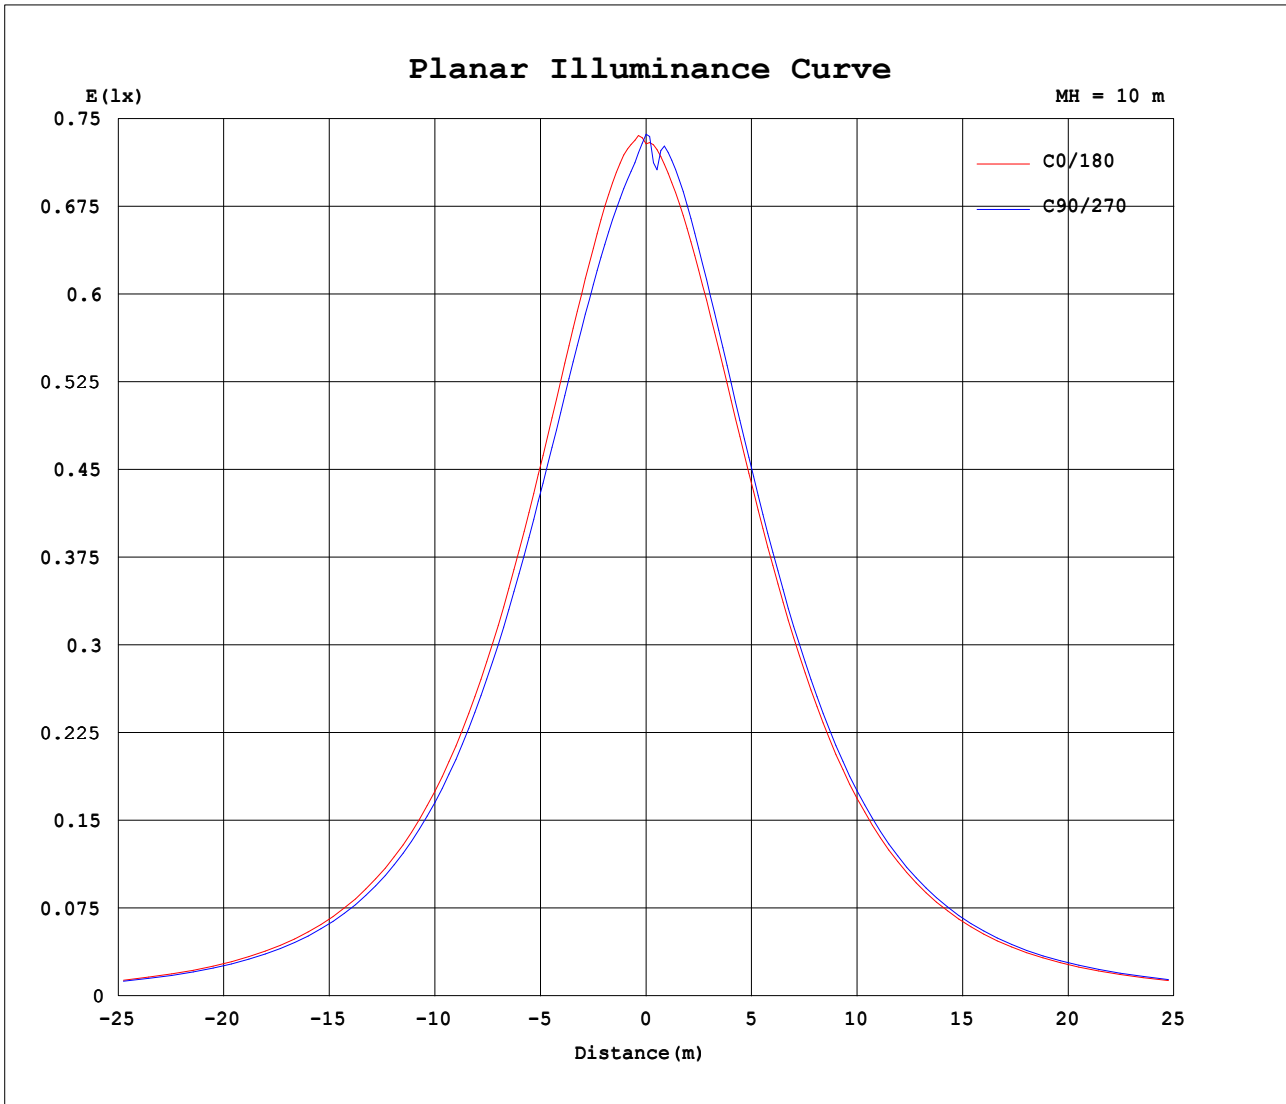


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2022-10-14

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

AAI Figure

Test:U:12.01V I:0.4738A P:3.784W PF:0.6649 Freq:59.98Hz Lamp Flux:217.912x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path Light	WEIGHT:
SPEC.:4W 3000K Max beam angle	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-041

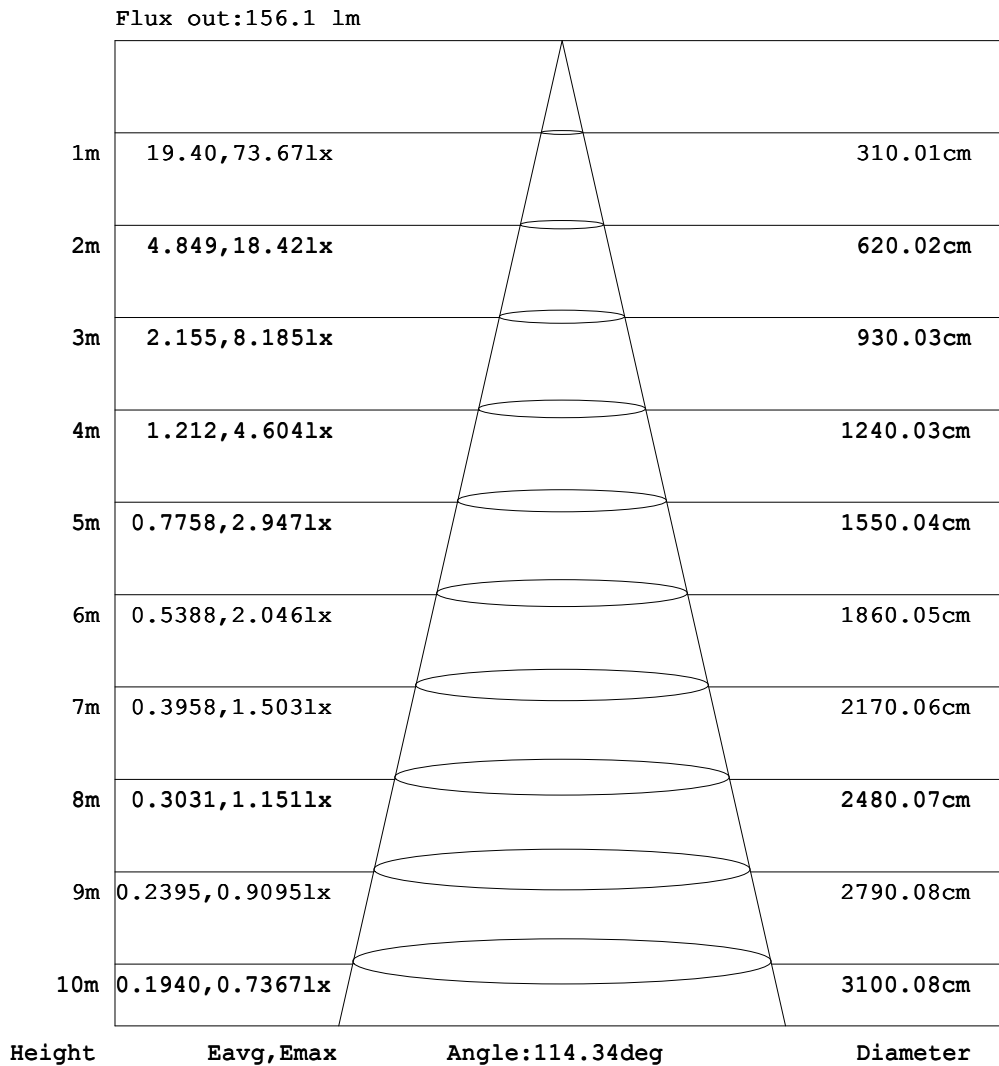

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.01V I:0.4738A P:3.784W PF:0.6649 Freq:59.98Hz Lamp Flux:217.912x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path Light	WEIGHT:
SPEC.:4W 3000K Max beam angle	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-041

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.15	0.00	0.00	0.00	0.00	0.05	0.12	0.17	0.22	0.28	0.33	0.36	0.40	0.44	0.49	0.52	0.55	0.59	0.58
-170	2.15	0.00	0.00	0.00	0.00	0.05	0.12	0.17	0.23	0.28	0.32	0.36	0.41	0.45	0.50	0.52	0.54	0.56	0.57
-160	2.15	0.00	0.00	0.00	0.01	0.04	0.10	0.17	0.20	0.26	0.31	0.35	0.38	0.43	0.45	0.48	0.51	0.52	0.53
-150	2.15	0.00	0.00	0.00	0.01	0.03	0.09	0.14	0.18	0.23	0.27	0.31	0.34	0.37	0.40	0.43	0.45	0.46	0.48
-140	2.15	0.00	0.00	0.00	0.01	0.02	0.05	0.10	0.14	0.19	0.21	0.27	0.29	0.31	0.34	0.36	0.37	0.38	0.39
-130	2.15	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.12	0.16	0.20	0.22	0.24	0.27	0.29	0.31	0.33	0.34
-120	2.15	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.08	0.11	0.13	0.15	0.17	0.18	0.20	0.21	0.22
-110	2.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.11
-100	2.15	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	2.15	2.03	1.91	1.79	1.68	1.56	1.44	1.32	1.20	1.08	0.96	0.84	0.72	0.60	0.48	0.36	0.24	0.12	0.00
-80	2.15	3.94	4.52	4.84	5.09	5.28	5.41	5.80	6.40	7.18	8.06	8.92	9.72	10.4	11.0	11.4	11.7	11.9	11.9
-70	2.15	4.80	5.83	6.81	8.26	10.2	12.2	13.7	15.0	16.3	17.5	18.5	19.5	20.3	21.0	21.5	21.9	22.1	22.1
-60	2.15	5.45	7.17	9.50	12.3	14.7	17.0	19.2	21.3	23.3	25.2	26.9	28.4	29.7	30.8	31.6	32.1	32.5	32.5
-50	2.15	6.06	8.66	12.1	15.2	18.3	21.4	24.4	27.3	30.1	32.5	34.8	36.8	38.5	39.9	41.0	41.8	42.2	42.3
-40	2.15	6.63	10.1	14.0	17.8	21.7	25.5	29.2	32.7	36.0	39.1	41.8	44.2	46.3	48.0	49.3	50.3	50.8	50.9
-30	2.15	7.12	11.2	15.6	20.0	24.4	28.8	33.1	37.2	40.9	44.4	47.6	50.3	52.7	54.7	56.2	57.3	57.8	58.0
-20	2.15	7.51	12.0	16.7	21.6	26.5	31.4	36.1	40.5	44.6	48.4	51.9	55.0	57.6	59.8	61.6	62.8	63.5	63.6
-10	2.15	7.78	12.5	17.5	22.6	27.8	33.0	37.9	42.6	46.9	51.0	54.6	57.9	60.8	63.3	65.5	67.2	68.3	68.4
0	2.15	7.92	12.7	17.7	23.0	28.3	33.5	38.6	43.3	47.8	51.9	55.7	59.1	62.1	64.9	67.5	69.9	71.9	72.8
10	2.15	7.79	12.5	17.6	22.7	28.0	33.1	38.1	42.8	47.3	51.4	55.1	58.5	61.5	64.2	66.7	68.9	70.8	72.0
20	2.15	7.53	12.1	16.9	21.8	26.8	31.7	36.5	41.0	45.2	49.1	52.7	55.9	58.8	61.2	63.3	65.0	66.2	66.8
30	2.15	7.13	11.4	15.8	20.3	24.8	29.4	33.7	37.9	41.8	45.4	48.7	51.6	54.2	56.4	58.2	59.5	60.5	60.9
40	2.15	6.64	10.3	14.3	18.2	22.2	26.1	30.0	33.6	37.1	40.2	43.1	45.7	48.0	49.9	51.5	52.6	53.4	53.8
50	2.15	6.07	8.91	12.4	15.7	18.9	22.1	25.3	28.3	31.2	33.9	36.3	38.5	40.4	42.0	43.2	44.2	44.8	45.1
60	2.15	5.45	7.30	9.98	12.8	15.3	17.7	20.1	22.4	24.5	26.6	28.5	30.2	31.6	32.9	33.9	34.6	35.1	35.4
70	2.15	4.80	5.85	7.04	8.90	11.1	13.0	14.6	16.1	17.5	18.8	20.0	21.2	22.2	23.0	23.7	24.2	24.6	24.7
80	2.15	3.95	4.53	4.86	5.13	5.41	5.86	6.67	7.66	8.76	9.88	10.9	11.9	12.7	13.2	13.6	13.9	14.1	14.2
90	2.15	2.03	1.91	1.79	1.68	1.56	1.44	1.32	1.20	1.08	0.96	0.84	0.72	0.60	0.48	0.36	0.24	0.12	0.00
100	2.15	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	2.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	2.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.04	0.05	0.05	0.05
130	2.15	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.08	0.12	0.14	0.14	0.14	0.16	0.16	0.16	0.15
140	2.15	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.09	0.14	0.15	0.19	0.20	0.23	0.28	0.29	0.30	0.30	0.30
150	2.15	0.00	0.00	0.00	0.00	0.01	0.05	0.10	0.15	0.18	0.21	0.26	0.30	0.32	0.33	0.34	0.34	0.34	0.33
160	2.15	0.00	0.00	0.00	0.00	0.03	0.08	0.14	0.17	0.22	0.29	0.32	0.34	0.37	0.39	0.44	0.45	0.44	0.43
170	2.15	0.00	0.00	0.00	0.00	0.04	0.11	0.16	0.21	0.26	0.30	0.35	0.39	0.43	0.47	0.48	0.50	0.51	0.50
180	2.15	0.00	0.00	0.00	0.00	0.05	0.12	0.17	0.22	0.28	0.33	0.36	0.40	0.44	0.49	0.52	0.55	0.59	0.58

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.01V I:0.4738A P:3.784W PF:0.6649 Freq:59.98Hz Lamp Flux:217.912x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path Light	WEIGHT:
SPEC.:4W 3000K Max beam angle	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-041

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.58	0.55	0.49	0.46	0.45	0.46	0.40	0.32	0.32	0.31	0.26	0.15	0.12	0.05	0.00	0.00	0.00	0.00	2.47
-170	0.56	0.52	0.50	0.47	0.46	0.44	0.39	0.32	0.32	0.30	0.23	0.15	0.12	0.04	0.00	0.00	0.00	0.00	2.47
-160	0.51	0.50	0.48	0.47	0.44	0.41	0.34	0.33	0.31	0.28	0.19	0.13	0.11	0.03	0.00	0.00	0.00	0.00	2.47
-150	0.47	0.46	0.44	0.42	0.38	0.35	0.33	0.32	0.29	0.22	0.16	0.13	0.09	0.01	0.00	0.00	0.00	0.01	2.47
-140	0.38	0.37	0.36	0.35	0.33	0.32	0.31	0.27	0.21	0.17	0.14	0.11	0.04	0.01	0.00	0.00	0.00	0.01	2.47
-130	0.34	0.33	0.31	0.29	0.27	0.24	0.21	0.18	0.15	0.13	0.10	0.05	0.01	0.00	0.00	0.00	0.00	0.03	2.47
-120	0.21	0.20	0.19	0.18	0.17	0.15	0.14	0.12	0.08	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.07	2.47
-110	0.10	0.10	0.09	0.08	0.07	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.19	2.47
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.06	0.17	0.66	2.47
-90	0.14	0.27	0.41	0.55	0.69	0.82	0.96	1.10	1.23	1.37	1.51	1.65	1.78	1.92	2.06	2.19	2.33	2.47	
-80	11.9	11.8	11.5	11.1	10.6	9.86	9.08	8.23	7.37	6.59	5.98	5.60	5.48	5.33	5.11	4.82	4.27	2.47	
-70	22.1	22.0	21.6	21.2	20.5	19.7	18.8	17.8	16.6	15.3	14.0	12.5	10.5	8.55	7.05	6.10	5.11	2.47	
-60	32.5	32.3	31.8	31.0	30.0	28.8	27.3	25.6	23.8	21.8	19.6	17.4	15.1	12.7	9.84	7.43	5.75	2.47	
-50	42.3	42.0	41.3	40.3	39.0	37.4	35.4	33.2	30.7	28.0	25.0	22.0	18.8	15.7	12.5	8.98	6.36	2.47	
-40	51.0	50.6	49.8	48.6	47.0	45.0	42.6	39.9	36.8	33.5	29.9	26.2	22.3	18.3	14.4	10.4	6.91	2.47	
-30	58.1	57.7	56.8	55.5	53.6	51.3	48.6	45.5	42.0	38.2	34.0	29.7	25.2	20.6	16.1	11.6	7.39	2.47	
-20	63.8	63.4	62.5	60.9	58.8	56.2	53.2	49.7	45.9	41.7	37.1	32.3	27.4	22.3	17.3	12.4	7.79	2.47	
-10	68.9	68.2	66.8	64.8	62.4	59.6	56.3	52.5	48.4	43.9	39.1	34.0	28.8	23.4	18.0	12.9	8.06	2.47	
0	73.3	71.7	69.5	67.0	64.2	61.1	57.6	53.8	49.5	44.8	39.9	34.7	29.3	23.8	18.3	13.1	8.21	2.47	
10	71.4	69.9	68.0	65.7	63.1	60.1	56.7	52.9	48.7	44.2	39.4	34.2	28.9	23.5	18.1	13.0	8.08	2.47	
20	66.5	65.6	64.2	62.3	60.0	57.2	54.0	50.4	46.5	42.2	37.6	32.7	27.6	22.5	17.4	12.5	7.81	2.47	
30	60.7	60.0	58.8	57.2	55.1	52.6	49.7	46.4	42.8	38.9	34.6	30.2	25.6	20.9	16.3	11.8	7.41	2.47	
40	53.6	52.9	51.9	50.5	48.7	46.5	43.9	41.1	37.9	34.4	30.7	26.8	22.8	18.7	14.7	10.7	6.91	2.47	
50	45.0	44.4	43.6	42.4	40.9	39.0	36.9	34.5	31.8	29.0	25.9	22.7	19.4	16.1	12.8	9.22	6.37	2.47	
60	35.2	34.8	34.1	33.1	31.9	30.5	28.9	27.0	25.0	22.8	20.5	18.1	15.6	13.2	10.3	7.57	5.76	2.47	
70	24.6	24.3	23.8	23.2	22.4	21.4	20.3	19.1	17.8	16.4	14.9	13.3	11.4	9.19	7.29	6.12	5.11	2.47	
80	14.1	13.9	13.6	13.3	12.8	12.0	11.1	10.1	8.96	7.85	6.86	6.05	5.62	5.36	5.12	4.82	4.27	2.47	
90	0.14	0.27	0.41	0.55	0.69	0.82	0.96	1.10	1.23	1.37	1.51	1.65	1.78	1.92	2.06	2.19	2.33	2.47	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.06	0.17	0.66	2.47
110	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.19	2.47
120	0.05	0.05	0.05	0.04	0.05	0.05	0.05	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	2.47
130	0.16	0.17	0.18	0.17	0.17	0.16	0.13	0.10	0.08	0.08	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.03	2.47
140	0.30	0.30	0.29	0.28	0.25	0.23	0.23	0.21	0.16	0.11	0.09	0.08	0.02	0.00	0.00	0.00	0.00	0.01	2.47
150	0.34	0.34	0.35	0.35	0.33	0.31	0.28	0.26	0.24	0.19	0.13	0.10	0.07	0.01	0.00	0.00	0.00	0.01	2.47
160	0.43	0.44	0.44	0.41	0.39	0.37	0.31	0.30	0.27	0.25	0.17	0.11	0.10	0.03	0.00	0.00	0.00	0.00	2.47
170	0.51	0.49	0.46	0.44	0.44	0.41	0.37	0.31	0.30	0.29	0.22	0.14	0.11	0.04	0.00	0.00	0.00	0.00	2.47
180	0.58	0.55	0.49	0.46	0.45	0.46	0.40	0.32	0.32	0.31	0.26	0.15	0.12	0.05	0.00	0.00	0.00	0.00	2.47

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: