

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	454.1 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	124.2V x 163.1H
	At 50% of Imax	85.8V x 109.1H
	At 90% of Imax	39.0V x 44.7H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	985.6 lumens per klm.
	To 50% of Imax	713.1 lumens per klm.
	To 90% of Imax	181.6 lumens per klm.

Upward LOR	0.1 %
Downward LOR	99.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.08V I:0.1726A P:1.998W PF:0.9584 Freq:59.97Hz Lamp Flux:66.0178x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:LumienARC	WEIGHT:
SPEC.:2W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAA-028

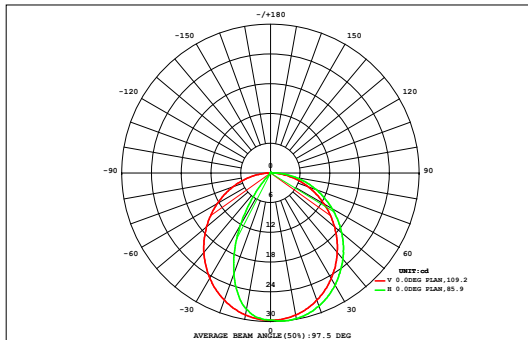

DATA OF LAMP		Eff:33.04lm/W	
MODEL	L3S1-1-2W-30K-WH	Imax(cd)	29.98
NOMINAL POWER(W)	2	AVAILABILITY(%)	98.1
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	64.75
NOMINAL FLUX(lm)	66.0178	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	66.02
TEST VOLTAGE(V)	12	θ @50%(H,V)	109,86DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT: lm		Φ t	Φ a		
	0.00	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.09	0.09	0.08	0.07	0.06	0.04	0.03	0.01	0.00	0.00	0.77	0.38	
90	0.00	0.01	0.04	0.07	0.11	0.15	0.18	0.21	0.22	0.22	0.21	0.19	0.15	0.11	0.07	0.04	0.01	0.00	2.00	1.93	
80	0.00	0.02	0.06	0.11	0.18	0.24	0.30	0.34	0.36	0.36	0.34	0.30	0.24	0.18	0.12	0.06	0.02	0.00	3.24	3.21	
70	0.00	0.03	0.08	0.16	0.24	0.33	0.41	0.47	0.50	0.50	0.47	0.41	0.33	0.24	0.16	0.08	0.03	0.00	4.43	4.41	
60	0.00	0.03	0.10	0.19	0.30	0.41	0.51	0.59	0.63	0.63	0.58	0.51	0.41	0.30	0.19	0.10	0.04	0.00	5.52	5.51	
50	0.00	0.04	0.11	0.22	0.35	0.48	0.60	0.69	0.74	0.74	0.69	0.60	0.48	0.35	0.22	0.11	0.04	0.01	6.46	6.45	
40	0.01	0.04	0.13	0.24	0.38	0.53	0.67	0.77	0.82	0.82	0.77	0.67	0.53	0.38	0.24	0.13	0.04	0.01	7.19	7.18	
30	0.01	0.05	0.13	0.25	0.40	0.56	0.71	0.82	0.88	0.88	0.82	0.71	0.56	0.40	0.25	0.13	0.05	0.01	7.64	7.63	
-30	0.01	0.05	0.13	0.26	0.41	0.57	0.72	0.84	0.90	0.90	0.84	0.72	0.57	0.41	0.26	0.13	0.05	0.01	7.77	7.77	
	0.01	0.04	0.12	0.24	0.38	0.54	0.69	0.81	0.88	0.88	0.81	0.69	0.54	0.38	0.24	0.12	0.05	0.01	7.42	7.41	
	0.01	0.04	0.10	0.18	0.31	0.46	0.60	0.71	0.76	0.76	0.70	0.60	0.46	0.31	0.18	0.10	0.04	0.01	6.33	6.32	
	0.00	0.03	0.07	0.12	0.22	0.33	0.42	0.49	0.53	0.53	0.48	0.42	0.33	0.22	0.12	0.07	0.03	0.00	4.43	4.42	
	0.00	0.03	0.05	0.06	0.11	0.17	0.19	0.22	0.24	0.24	0.22	0.19	0.17	0.11	0.06	0.05	0.03	0.00	2.13	2.07	
-40	0.00	0.02	0.03	0.02	0.02	0.06	0.03	0.02	0.02	0.02	0.02	0.03	0.06	0.02	0.02	0.03	0.02	0.00	0.47	0.08	
-50	0.00	0.01	0.02	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.02	0.01	0.00	0.10	0.00	
-60	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.04	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)				20	30	40	50	60	70	80	90	
Φ t	0.06	0.46	1.20	2.17	3.46	4.89	6.11	7.04	7.57	7.57	7.04	6.11	4.89	3.46	2.17	1.21	0.47	0.06	66	---	
Φ a	0.01	0.37	1.11	2.09	3.40	4.82	6.05	6.99	7.52	7.52	6.99	6.05	4.82	3.40	2.10	1.12	0.39	0.01	---	65	


one-half-peak spread: U:32.5,D:51.9 , L:54.9,R:54.9NEMA Beam Type: Type 7 x 6 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.08V I:0.1726A P:1.998W PF:0.9584 Freq:59.97Hz Lamp Flux:66.0178x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:LumienARC	WEIGHT:
SPEC.:2W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAA-028

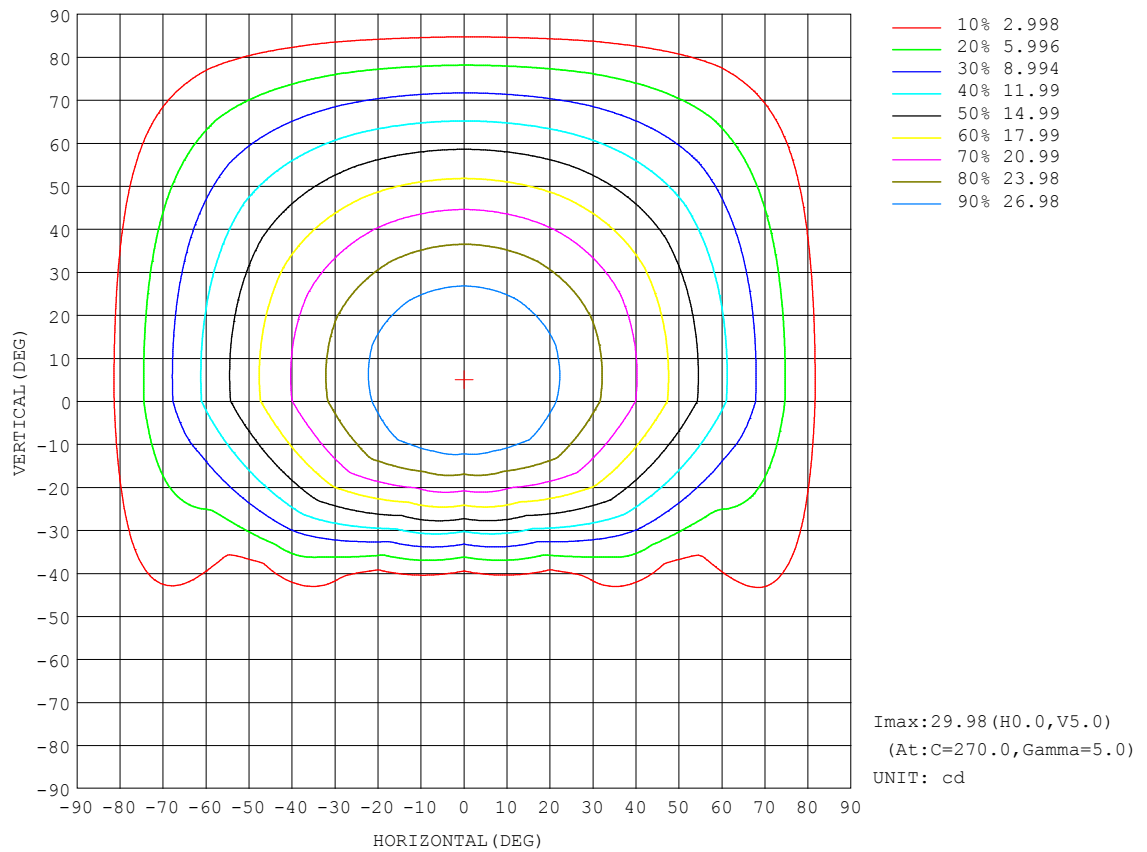


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.08V I:0.1726A P:1.998W PF:0.9584 Freq:59.97Hz Lamp Flux:66.0178x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:LumienARC	WEIGHT:
SPEC.:2W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAA-028

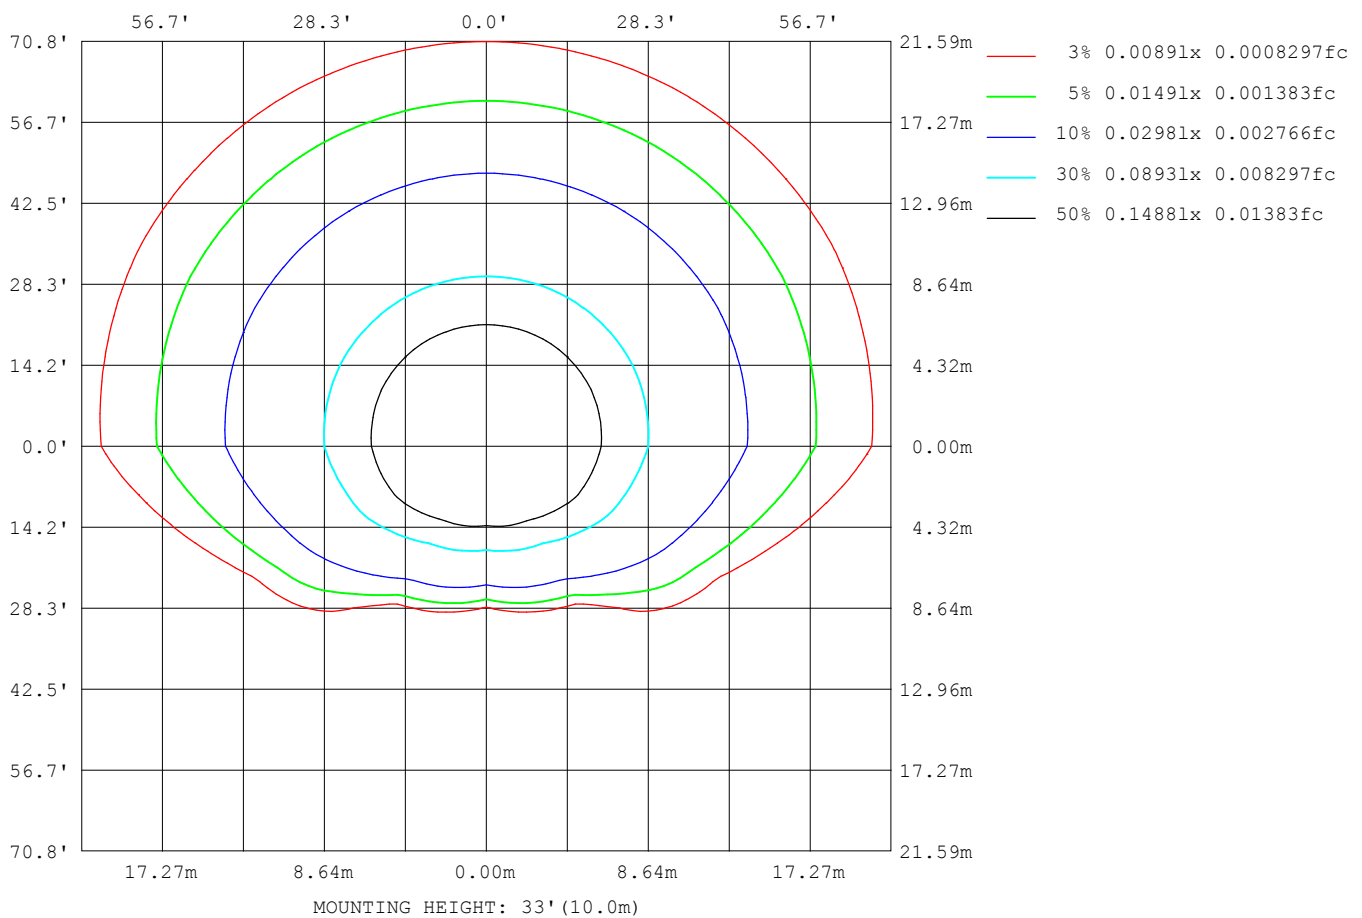

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

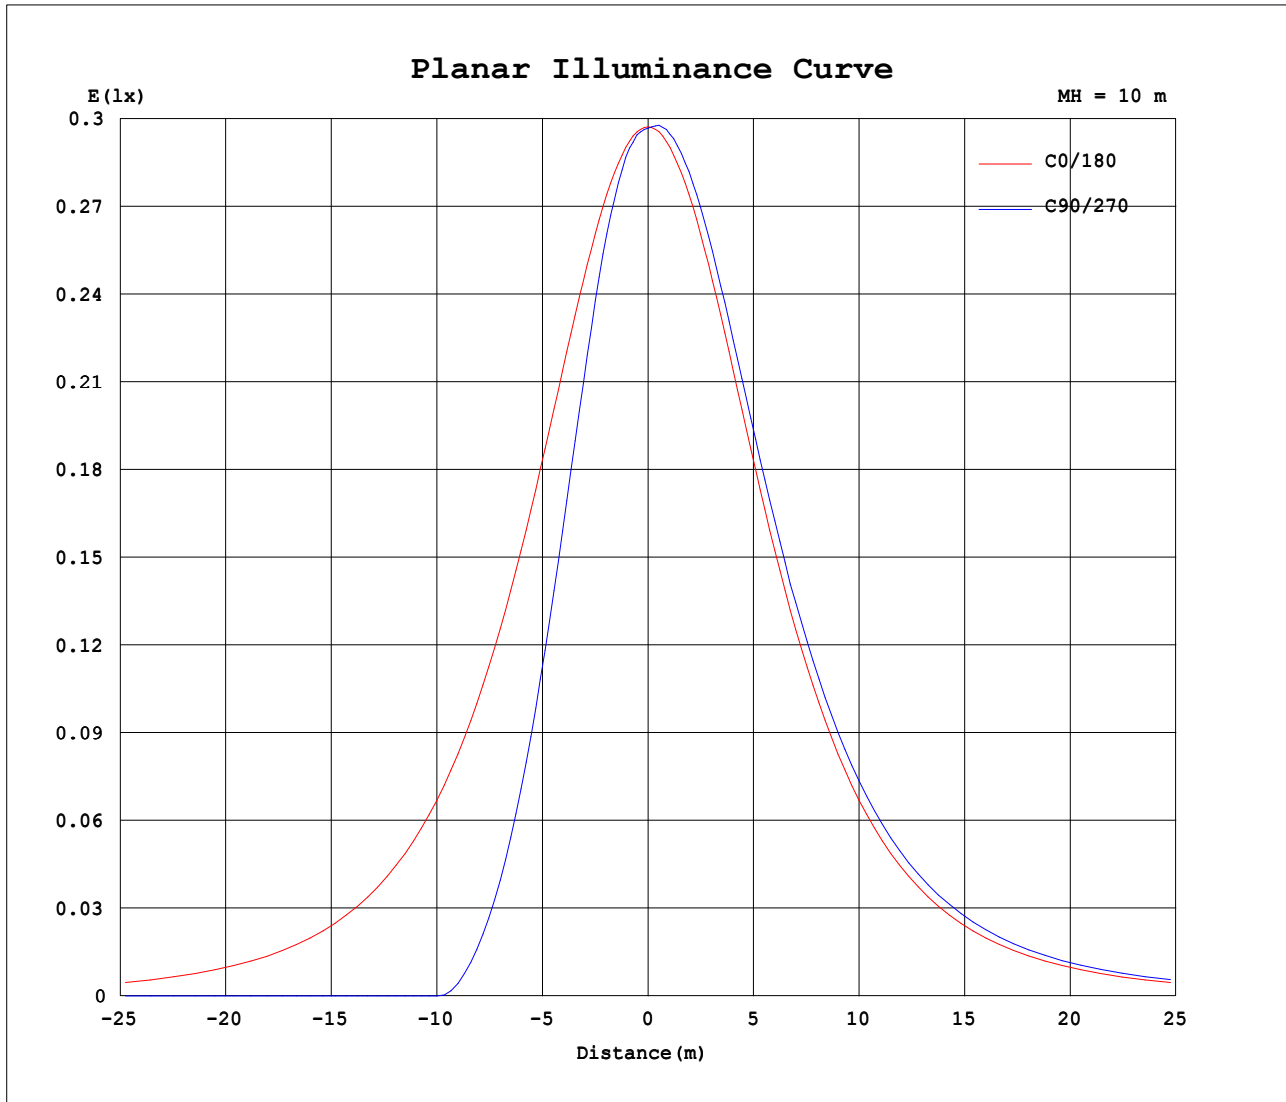


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.08V I:0.1726A P:1.998W PF:0.9584 Freq:59.97Hz Lamp Flux:66.0178x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:LumienARC	WEIGHT:
SPEC.:2W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAA-028

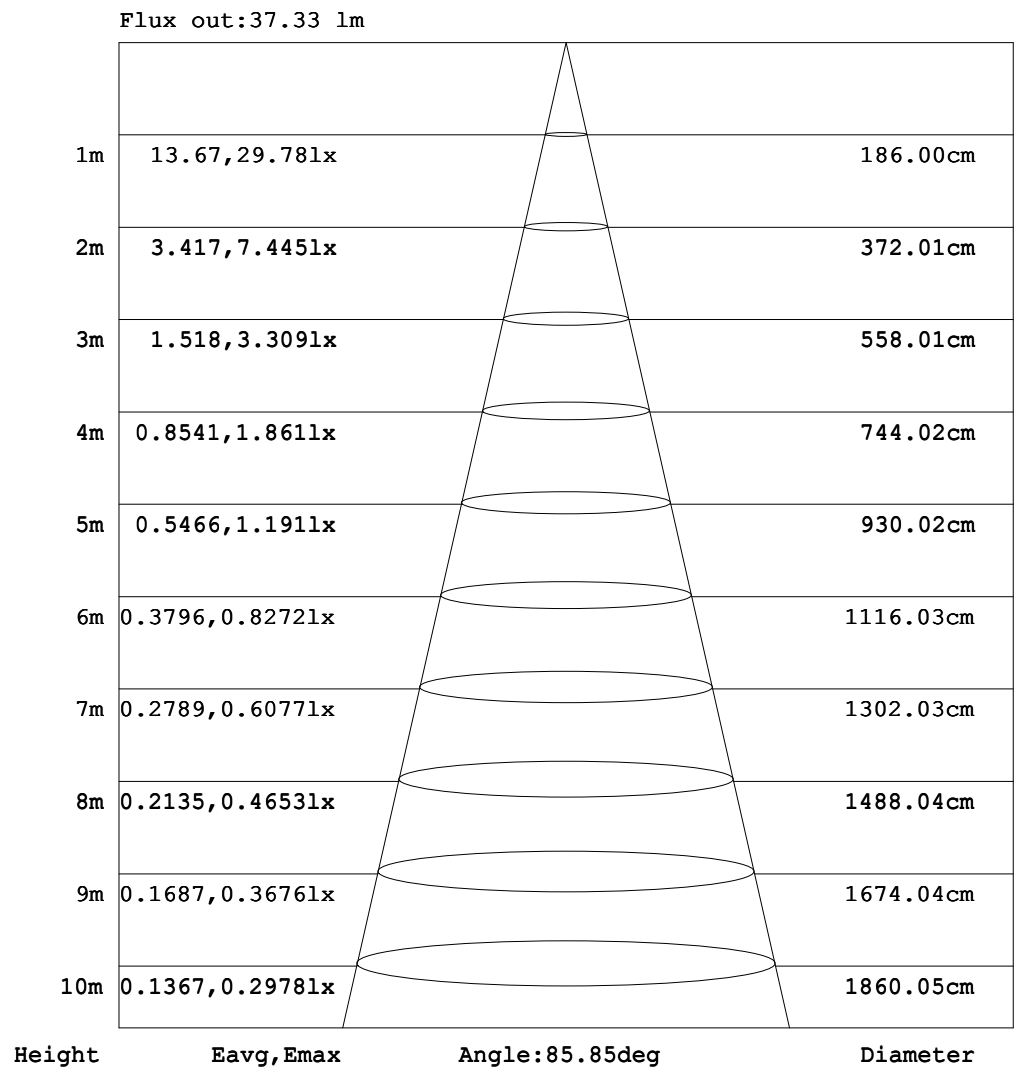

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.1726A P:1.998W PF:0.9584 Freq:59.97Hz Lamp Flux:66.0178x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:LumienARC	WEIGHT:
SPEC.:2W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAA-028

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.04	0.05	0.06	0.06
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.06	0.07	0.08	0.09
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.03	0.05	0.05	0.05	0.06
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.16	0.28	0.30	0.21	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.19	0.60	0.81	0.82	0.60	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.44	1.06	1.41	1.46	1.21	0.63	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.70	1.55	2.08	2.28	2.10	1.52	0.52	0.00	0.00	0.50	0.93	0.85	0.22	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.92	2.03	2.83	3.27	3.32	2.92	2.06	1.48	2.66	3.85	4.22	3.71	2.97	2.42	3.09	3.35	3.19	2.57
-30	0.00	1.13	2.50	3.62	4.42	4.85	4.87	5.06	6.17	7.53	9.00	10.0	10.7	11.3	11.6	11.9	12.7	12.8	12.3
-20	0.00	1.30	2.93	4.41	5.67	6.62	7.30	8.76	10.5	12.4	14.3	16.2	18.0	19.1	20.1	20.8	21.4	21.9	21.7
-10	0.00	1.43	3.30	5.14	6.90	8.49	10.1	12.0	14.1	16.1	18.2	20.2	22.2	23.9	25.5	26.7	27.4	27.9	28.0
0	0.00	1.51	3.57	5.74	7.98	10.2	12.5	14.7	16.9	18.9	21.0	22.8	24.5	26.0	27.3	28.3	29.1	29.6	29.7
10	0.00	1.50	3.57	5.75	8.00	10.3	12.5	14.7	16.9	19.0	21.0	22.9	24.6	26.1	27.5	28.5	29.2	29.7	29.8
20	0.00	1.43	3.43	5.55	7.73	9.91	12.1	14.2	16.4	18.4	20.3	22.1	23.8	25.1	26.3	27.3	28.0	28.4	28.6
30	0.00	1.30	3.17	5.15	7.18	9.22	11.3	13.3	15.2	17.1	18.9	20.4	21.8	23.1	24.1	25.0	25.6	25.9	26.1
40	0.00	1.12	2.79	4.56	6.37	8.22	10.0	11.8	13.6	15.1	16.6	17.9	19.1	20.2	21.1	21.8	22.3	22.6	22.7
50	0.00	0.89	2.31	3.79	5.34	6.90	8.47	9.99	11.4	12.6	13.8	14.9	15.9	16.8	17.5	18.0	18.4	18.6	18.7
60	0.00	0.62	1.73	2.91	4.12	5.36	6.59	7.77	8.81	9.76	10.7	11.5	12.2	12.9	13.4	13.8	14.1	14.3	14.3
70	0.00	0.33	1.11	1.92	2.78	3.64	4.51	5.29	6.00	6.66	7.28	7.86	8.38	8.79	9.12	9.40	9.60	9.73	9.78
80	0.00	0.10	0.46	0.90	1.36	1.83	2.30	2.71	3.09	3.45	3.78	4.09	4.37	4.59	4.76	4.91	5.02	5.09	5.13
90	0.00	0.06	0.12	0.19	0.25	0.31	0.37	0.44	0.51	0.58	0.65	0.72	0.79	0.82	0.84	0.87	0.89	0.92	0.94
100	0.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.04	0.05	0.06	0.06

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.1726A P:1.998W PF:0.9584 Freq:59.97Hz Lamp Flux:66.0178x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:LumienARC	WEIGHT:
SPEC.:2W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAA-028

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.06	0.04	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.08	0.06	0.08	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.06	0.06	0.04	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.23	0.33	0.32	0.20	0.01	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.63	0.85	0.86	0.65	0.24	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.64	1.23	1.51	1.47	1.12	0.51	0.00	
-50	0.00	0.00	0.00	0.00	0.22	0.85	0.94	0.52	0.00	0.00	0.52	1.53	2.13	2.33	2.15	1.61	0.77	0.00	
-40	3.18	3.34	3.07	2.41	2.98	3.70	4.23	3.86	2.67	1.52	2.06	2.94	3.34	3.33	2.89	2.12	1.00	0.00	
-30	12.8	12.6	11.9	11.5	11.2	10.7	9.98	8.97	7.53	6.18	5.09	4.88	4.89	4.47	3.69	2.60	1.21	0.00	
-20	21.9	21.3	20.7	20.0	19.1	17.9	16.2	14.2	12.3	10.5	8.77	7.33	6.65	5.70	4.49	3.04	1.38	0.00	
-10	27.8	27.3	26.6	25.5	23.9	22.1	20.2	18.2	16.1	14.1	12.0	10.1	8.51	6.94	5.24	3.41	1.51	0.00	
0	29.6	29.1	28.4	27.3	26.1	24.5	22.8	21.0	18.9	16.9	14.7	12.5	10.2	8.03	5.85	3.69	1.59	0.00	
10	29.7	29.2	28.5	27.5	26.2	24.6	22.9	21.0	19.0	16.9	14.7	12.5	10.3	8.05	5.85	3.69	1.58	0.00	
20	28.4	28.0	27.3	26.3	25.1	23.8	22.1	20.3	18.4	16.3	14.2	12.1	9.95	7.78	5.65	3.55	1.51	0.00	
30	25.9	25.6	25.0	24.2	23.0	21.8	20.4	18.8	17.1	15.2	13.3	11.3	9.28	7.24	5.25	3.29	1.38	0.00	
40	22.6	22.3	21.8	21.1	20.2	19.1	17.9	16.6	15.1	13.6	11.8	10.1	8.26	6.46	4.66	2.91	1.20	0.00	
50	18.6	18.4	18.0	17.5	16.8	15.9	14.9	13.8	12.6	11.4	10.0	8.51	6.98	5.45	3.91	2.41	0.97	0.00	
60	14.3	14.1	13.8	13.4	12.9	12.2	11.5	10.7	9.82	8.85	7.82	6.67	5.46	4.24	3.03	1.83	0.70	0.00	
70	9.73	9.61	9.41	9.14	8.80	8.40	7.90	7.35	6.73	6.10	5.40	4.62	3.76	2.89	2.02	1.19	0.39	0.00	
80	5.10	5.04	4.94	4.81	4.66	4.45	4.17	3.87	3.54	3.19	2.82	2.42	1.93	1.45	0.98	0.52	0.12	0.00	
90	0.92	0.89	0.87	0.84	0.82	0.79	0.72	0.65	0.57	0.50	0.43	0.36	0.30	0.24	0.18	0.12	0.06	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.06	0.04	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: