

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		7971.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I _{max} At 50% of I _{max} At 90% of I _{max}	36.2V x 36.0H 17.2V x 17.2H 7.3V x 7.2H
Beam Flux	Total To 10% of I _{max} To 50% of I _{max} To 90% of I _{max}	1001.2 lumens per klm. 833.8 lumens per klm. 396.3 lumens per klm. 85.7 lumens per klm.
	Upward LOR Downward LOR	1.0 % 99.1 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.12V I:0.3477A P:2.779W PF:0.6592 Freq:59.99Hz Lamp Flux:93.6207x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano Knuckle	WEIGHT:
SPEC.:3W 3000K 15°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-107

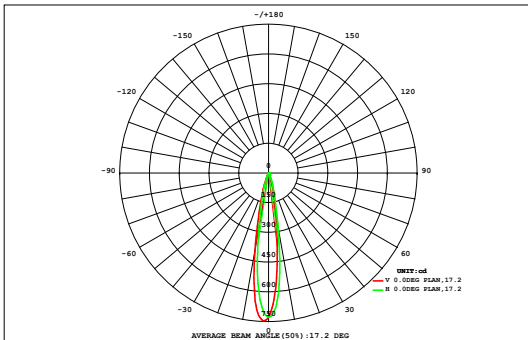

DATA OF LAMP		Eff:33.69lm/W	
MODEL	N4B3-3W-30K-15-A	Imax (cd)	746.3
NOMINAL POWER (W)	3	AVAILABILITY (%)	83.0
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	77.67
NOMINAL FLUX (lm)	93.6207	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	93.62
TEST VOLTAGE (V)	12	θ @50% (H, V)	17,17DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm		Φ t	Φ a	
	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.05	0.06	0.06	0.05	0.04	0.03	0.03	0.02	0.01	0.01			0.01
27	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.05	0.06	0.06	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.01	0.53	0.00
24	0.01	0.02	0.02	0.03	0.05	0.07	0.09	0.10	0.11	0.11	0.10	0.08	0.06	0.04	0.03	0.02	0.01	0.01	0.96	0.00
21	0.01	0.02	0.03	0.05	0.08	0.12	0.15	0.17	0.18	0.17	0.16	0.13	0.10	0.07	0.05	0.03	0.02	0.01	1.57	0.00
18	0.02	0.03	0.05	0.09	0.14	0.19	0.22	0.25	0.26	0.25	0.23	0.19	0.15	0.11	0.07	0.04	0.03	0.02	2.34	1.23
15	0.03	0.04	0.08	0.13	0.20	0.27	0.33	0.39	0.42	0.40	0.35	0.28	0.21	0.15	0.10	0.06	0.03	0.02	3.49	2.74
12	0.03	0.06	0.11	0.19	0.28	0.39	0.53	0.66	0.72	0.68	0.56	0.41	0.29	0.20	0.12	0.08	0.04	0.02	5.37	4.72
9	0.04	0.07	0.14	0.24	0.36	0.56	0.83	1.09	1.21	1.13	0.89	0.61	0.39	0.26	0.15	0.09	0.05	0.03	8.14	7.56
6	0.04	0.08	0.17	0.29	0.46	0.77	1.19	1.55	1.70	1.59	1.25	0.81	0.48	0.30	0.18	0.10	0.06	0.03	11.0	10.5
3	0.04	0.09	0.19	0.32	0.54	0.94	1.45	1.84	1.97	1.84	1.44	0.92	0.53	0.32	0.19	0.10	0.06	0.03	12.8	12.3
0	0.04	0.09	0.19	0.32	0.54	0.94	1.45	1.84	1.96	1.83	1.44	0.92	0.53	0.32	0.19	0.09	0.06	0.03	12.8	12.3
-3	0.04	0.08	0.17	0.28	0.46	0.77	1.19	1.54	1.69	1.58	1.24	0.81	0.49	0.30	0.18	0.09	0.05	0.03	11.0	10.5
-6	0.03	0.06	0.13	0.23	0.36	0.57	0.84	1.09	1.20	1.13	0.89	0.61	0.40	0.25	0.14	0.08	0.05	0.03	8.09	7.55
-9	0.03	0.05	0.09	0.17	0.27	0.39	0.54	0.67	0.73	0.69	0.57	0.42	0.30	0.19	0.10	0.06	0.04	0.02	5.31	4.71
-12	0.02	0.04	0.06	0.11	0.18	0.26	0.33	0.40	0.43	0.41	0.35	0.28	0.20	0.12	0.07	0.05	0.03	0.02	3.35	2.64
-15	0.02	0.03	0.04	0.06	0.10	0.15	0.20	0.24	0.25	0.24	0.22	0.17	0.11	0.07	0.05	0.03	0.02	0.01	2.02	0.94
-18	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.12	0.12	0.12	0.10	0.08	0.06	0.05	0.03	0.02	0.01	0.01	1.06	0.00
-21	0.01	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.58	0.00
-24	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.32	0.00
-27	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.32	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	6	9	12	15	18	21	24	27				
Φ t	0.44	0.79	1.55	2.63	4.17	6.55	9.56	12.1	13.1	12.3	9.91	6.85	4.41	2.82	1.72	0.97	0.58	0.32	91	---
Φ a	0.00	0.00	0.34	1.81	3.50	5.90	8.96	11.5	12.5	11.7	9.29	6.17	3.69	1.94	0.30	0.00	0.00	0.00	---	78


one-half-peak spread: U:8.7,D:8.6 , L:8.4,R:8.9 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.12V I:0.3477A P:2.779W PF:0.6592 Freq:59.99Hz Lamp Flux:93.6207x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano Knuckle	WEIGHT:
SPEC.:3W 3000K 15°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-107

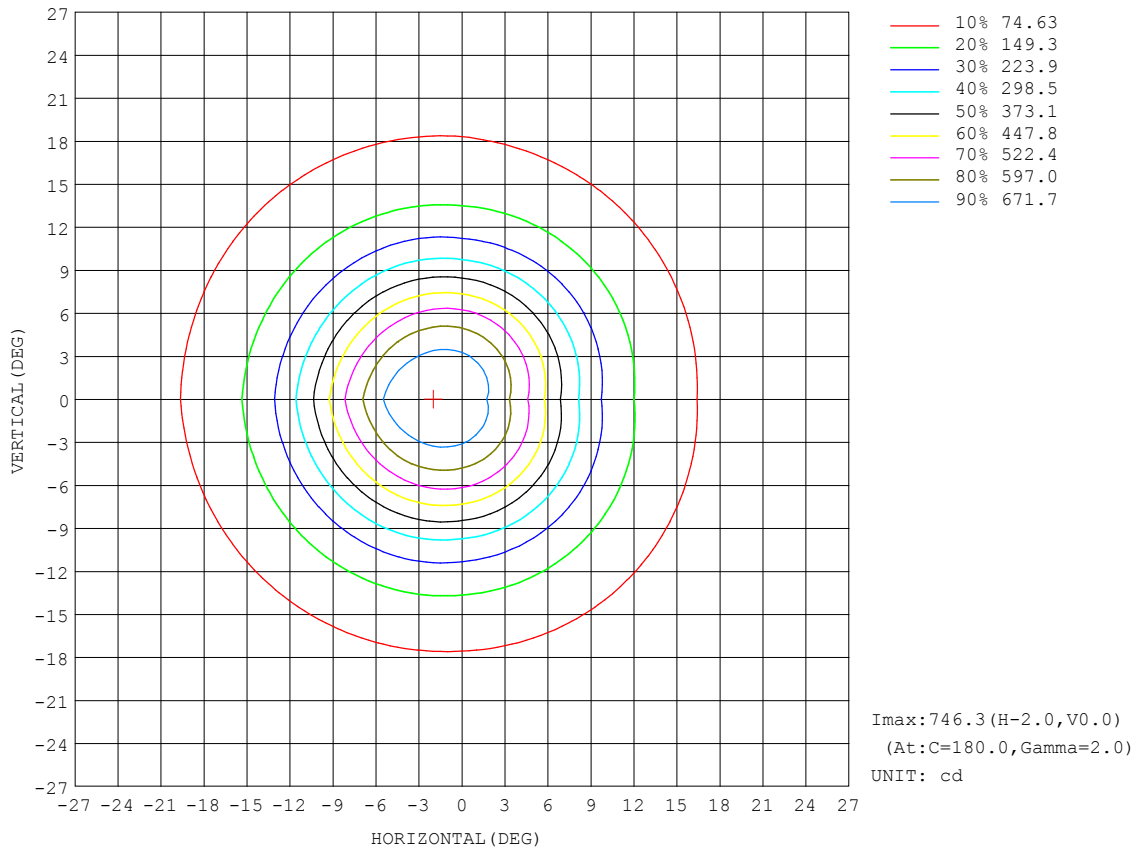


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.12V I:0.3477A P:2.779W PF:0.6592 Freq:59.99Hz Lamp Flux:93.6207x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano Knuckle	WEIGHT:
SPEC.:3W 3000K 15°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-107

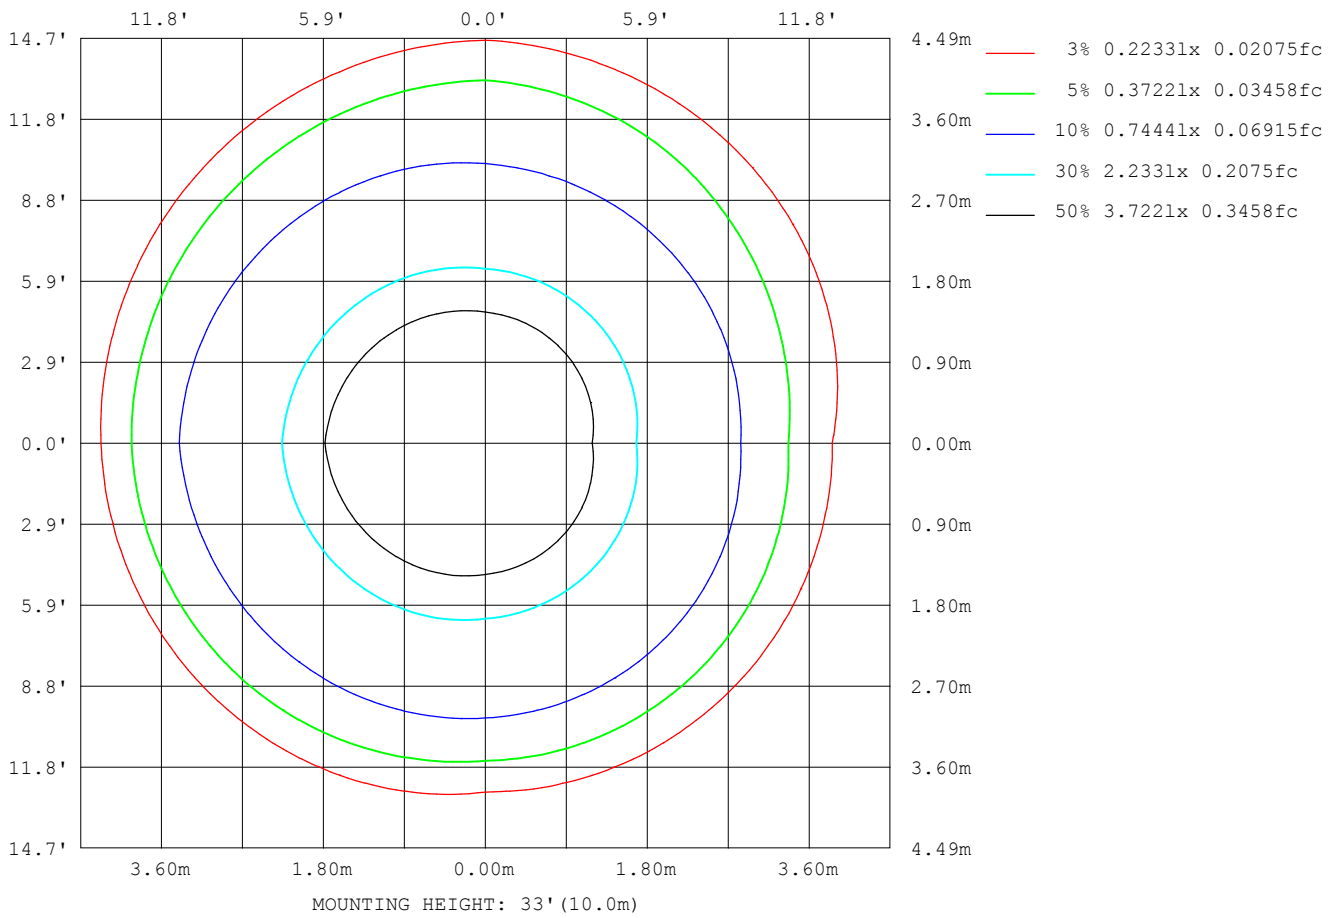

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

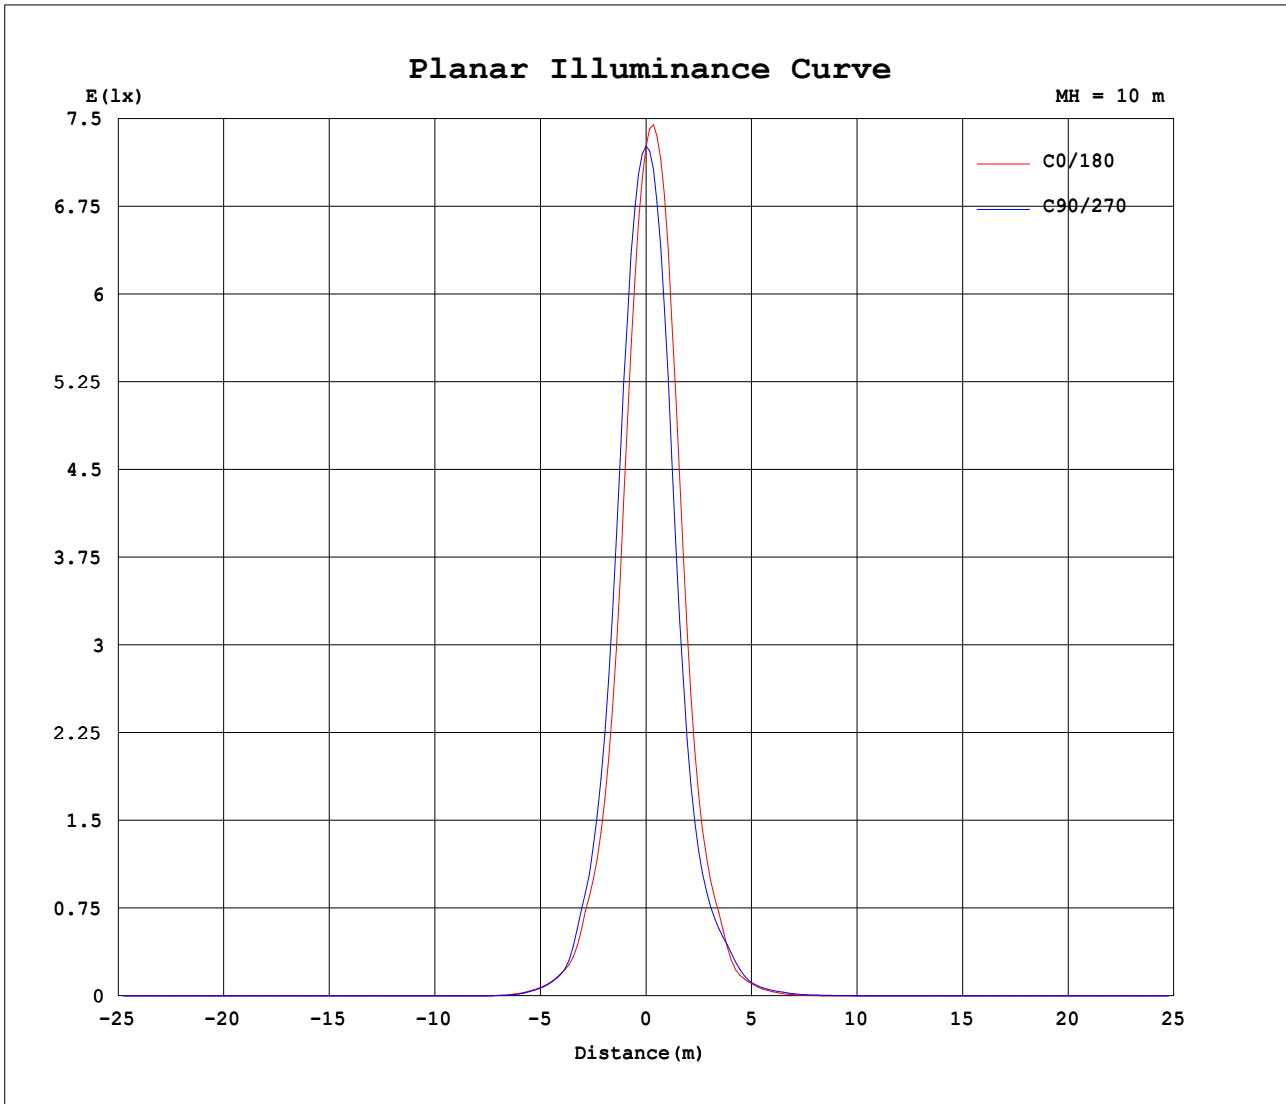


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-09-15

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

AAI Figure

Test:U:12.12V I:0.3477A P:2.779W PF:0.6592 Freq:59.99Hz Lamp Flux:93.6207x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano Knuckle	WEIGHT:
SPEC.:3W 3000K 15°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-107

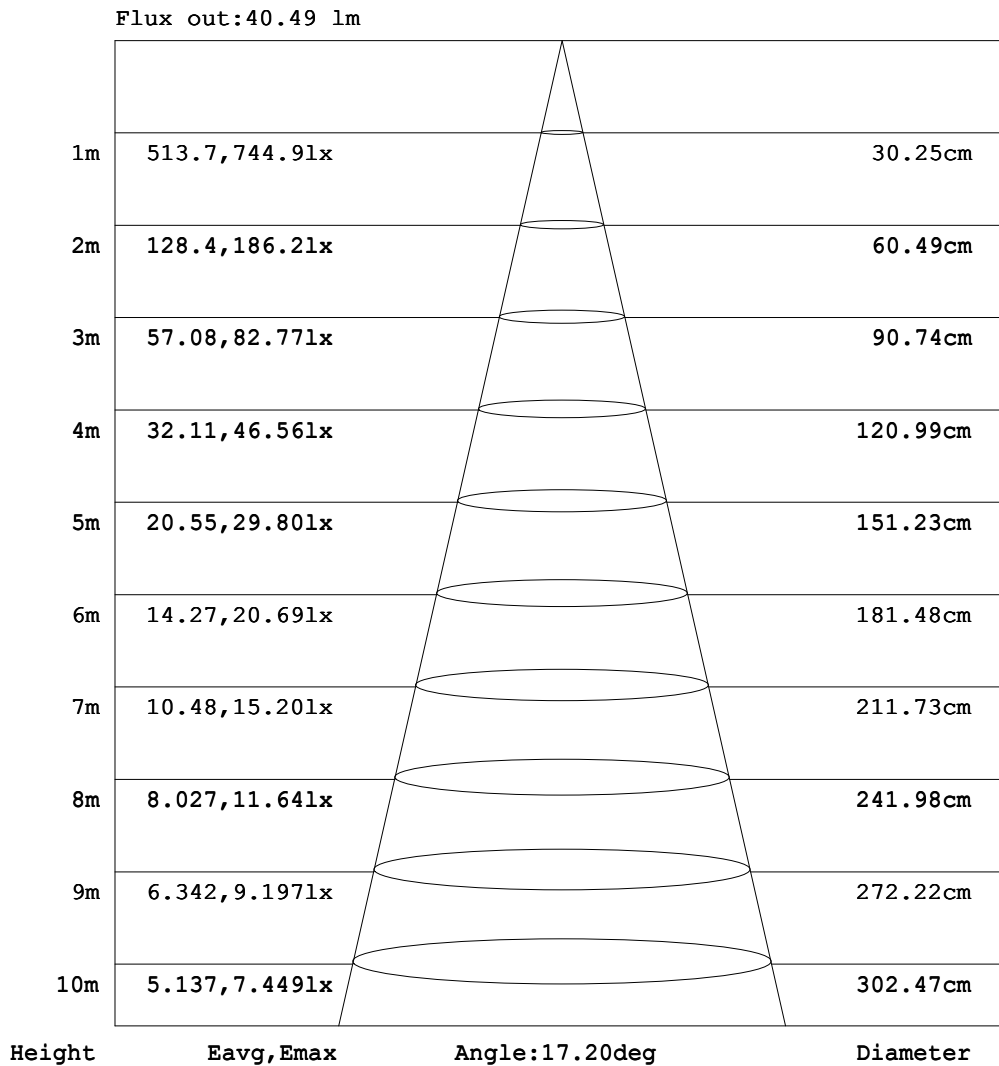

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.3477A P:2.779W PF:0.6592 Freq:59.99Hz Lamp Flux:93.6207x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano Knuckle	WEIGHT:
SPEC.:3W 3000K 15°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-107

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.45	0.82	1.11	1.20	1.19	1.21
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.15	0.46	0.81	1.10	1.25	1.32	1.37
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.11	0.27	0.55	0.82	1.02	1.17	1.27
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.19	0.33	0.51	0.65	0.75
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.06
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.07	0.08	0.08	0.12	0.11
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.10	0.21	0.46	0.96	1.86	3.05	3.96	4.07
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.16	0.42	1.32	4.01	8.96	16.5	26.3	36.2	36.7
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.37	1.28	4.78	13.0	32.1	87.2	162	257	284
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.50	2.08	7.24	19.7	68.8	158	396	693	727
10	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.03	0.21	0.55	1.69	5.69	14.4	38.3	90.9	160	254	284
20	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.16	0.37	0.89	2.34	5.95	11.6	22.8	41.5	57.4	61.0
30	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.08	0.20	0.39	0.81	1.49	2.76	4.81	6.84	8.35	9.01
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.09	0.15	0.27	0.43	0.64	0.93	1.24	1.48	1.64
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.07	0.10	0.13	0.17	0.23	0.28	0.34	0.37
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.10	0.11
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.12	0.14
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.25	0.49	0.70	0.83	0.89
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.32	0.67	0.97	1.12	1.19	1.19
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.45	0.82	1.11	1.20	1.19	1.20

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.3477A P:2.779W PF:0.6592 Freq:59.99Hz Lamp Flux:93.6207x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano Knuckle	WEIGHT:
SPEC.:3W 3000K 15°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-107

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.22	1.35	1.35	1.21	1.04	0.77	0.43	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	1.37	1.37	1.28	1.17	0.98	0.68	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	1.23	1.18	1.07	0.90	0.66	0.36	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.73	0.65	0.50	0.34	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.10	0.04	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	3.69	2.58	1.38	0.60	0.26	0.10	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	31.5	22.3	13.9	7.37	2.74	0.72	0.23	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	213	122	57.0	22.6	9.67	3.03	0.63	0.18	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	498	212	94.7	32.3	13.8	4.75	1.03	0.25	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	210	121	60.6	28.8	11.1	3.93	1.04	0.36	0.09	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	52.7	37.5	20.2	9.98	4.68	1.74	0.69	0.28	0.10	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00
30	8.09	6.37	4.32	2.40	1.28	0.70	0.34	0.15	0.08	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00
40	1.46	1.20	0.89	0.60	0.37	0.24	0.15	0.09	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.34	0.28	0.23	0.17	0.13	0.10	0.07	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.10	0.09	0.08	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.19	0.19	0.17	0.15	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.89	0.85	0.74	0.61	0.42	0.25	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	1.24	1.23	1.15	1.04	0.84	0.58	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	1.22	1.35	1.35	1.21	1.04	0.77	0.43	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: