

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		362.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	159.2V x 155.8H 110.9V x 109.4H 47.3V x 48.4H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	1000.0 lumens per klm. 984.0 lumens per klm. 729.2 lumens per klm. 187.3 lumens per klm.
	Upward LOR Downward LOR	0.2 % 99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.03V I:0.3641A P:2.721W PF:0.6213 Freq:59.99Hz Lamp Flux:122.445x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light	WEIGHT:
SPEC.:3W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

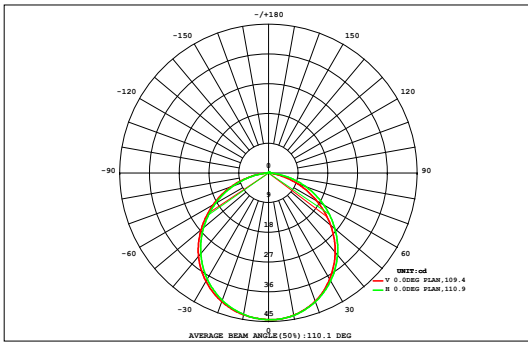

DATA OF LAMP		Eff:45.00lm/W	
MODEL	W4B4-3W-30K-A	Imax (cd)	44.42
NOMINAL POWER (W)	3	AVAILABILITY (%)	98.4
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	120.4
NOMINAL FLUX (lm)	122.445	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	122.4
TEST VOLTAGE (V)	12	θ @50% (H,V)	109,111DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.04	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.33	0.00
90	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.04	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.33	0.00
80	0.00	0.00	0.02	0.06	0.10	0.15	0.19	0.23	0.24	0.24	0.21	0.17	0.12	0.08	0.03	0.01	0.00	0.00	1.87	1.57
70	0.00	0.02	0.06	0.13	0.21	0.30	0.38	0.44	0.47	0.46	0.42	0.36	0.27	0.18	0.10	0.04	0.00	0.00	3.84	3.75
60	0.00	0.03	0.10	0.20	0.32	0.45	0.56	0.64	0.69	0.68	0.63	0.54	0.42	0.29	0.16	0.07	0.01	0.00	5.77	5.73
50	0.00	0.04	0.13	0.26	0.42	0.58	0.72	0.83	0.89	0.88	0.82	0.70	0.55	0.38	0.23	0.10	0.02	0.00	7.56	7.53
40	0.00	0.05	0.16	0.31	0.50	0.69	0.87	0.99	1.06	1.06	0.98	0.85	0.67	0.47	0.28	0.13	0.03	0.00	9.10	9.08
30	0.00	0.06	0.18	0.36	0.57	0.79	0.98	1.12	1.20	1.19	1.11	0.96	0.76	0.54	0.32	0.15	0.04	0.00	10.3	10.3
20	0.01	0.06	0.20	0.39	0.62	0.85	1.05	1.21	1.29	1.29	1.20	1.04	0.82	0.58	0.35	0.16	0.04	0.00	11.2	11.1
10	0.01	0.07	0.20	0.40	0.64	0.88	1.09	1.25	1.33	1.33	1.25	1.08	0.85	0.60	0.36	0.17	0.04	0.00	11.6	11.6
0	0.01	0.07	0.20	0.40	0.64	0.88	1.09	1.24	1.33	1.33	1.24	1.08	0.85	0.60	0.36	0.17	0.04	0.00	11.5	11.5
-10	0.01	0.06	0.20	0.39	0.61	0.85	1.05	1.20	1.28	1.28	1.20	1.03	0.82	0.58	0.35	0.16	0.04	0.00	11.1	11.1
-20	0.00	0.06	0.18	0.36	0.57	0.78	0.97	1.11	1.18	1.18	1.10	0.95	0.75	0.53	0.32	0.15	0.04	0.00	10.2	10.2
-30	0.00	0.05	0.16	0.31	0.50	0.69	0.86	0.98	1.05	1.04	0.97	0.84	0.66	0.46	0.28	0.13	0.03	0.00	9.00	8.98
-40	0.00	0.04	0.13	0.26	0.41	0.57	0.71	0.82	0.87	0.87	0.81	0.69	0.54	0.38	0.22	0.10	0.02	0.00	7.44	7.41
-50	0.00	0.03	0.09	0.19	0.31	0.44	0.55	0.63	0.67	0.67	0.61	0.52	0.41	0.28	0.16	0.07	0.01	0.00	5.65	5.60
-60	0.00	0.01	0.06	0.12	0.21	0.29	0.37	0.42	0.45	0.45	0.41	0.34	0.26	0.17	0.09	0.03	0.00	0.00	3.70	3.61
-70	0.00	0.00	0.02	0.06	0.10	0.14	0.18	0.21	0.23	0.22	0.20	0.16	0.11	0.07	0.03	0.01	0.00	0.00	1.74	1.38
-80	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.26	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.05	0.64	2.08	4.21	6.76	9.37	11.7	13.4	14.3	14.3	13.2	11.4	8.91	6.21	3.66	1.64	0.39	0.01	122	---
Φ a	0.00	0.52	1.98	4.11	6.66	9.28	11.6	13.3	14.2	14.2	13.1	11.3	8.80	6.11	3.56	1.53	0.24	0.00	---	120


one-half-peak spread: U:58.3,D:53.2 , L:58.6,R:50.4 NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.03V I:0.3641A P:2.721W PF:0.6213 Freq:59.99Hz Lamp Flux:122.445x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light	WEIGHT:
SPEC.:3W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

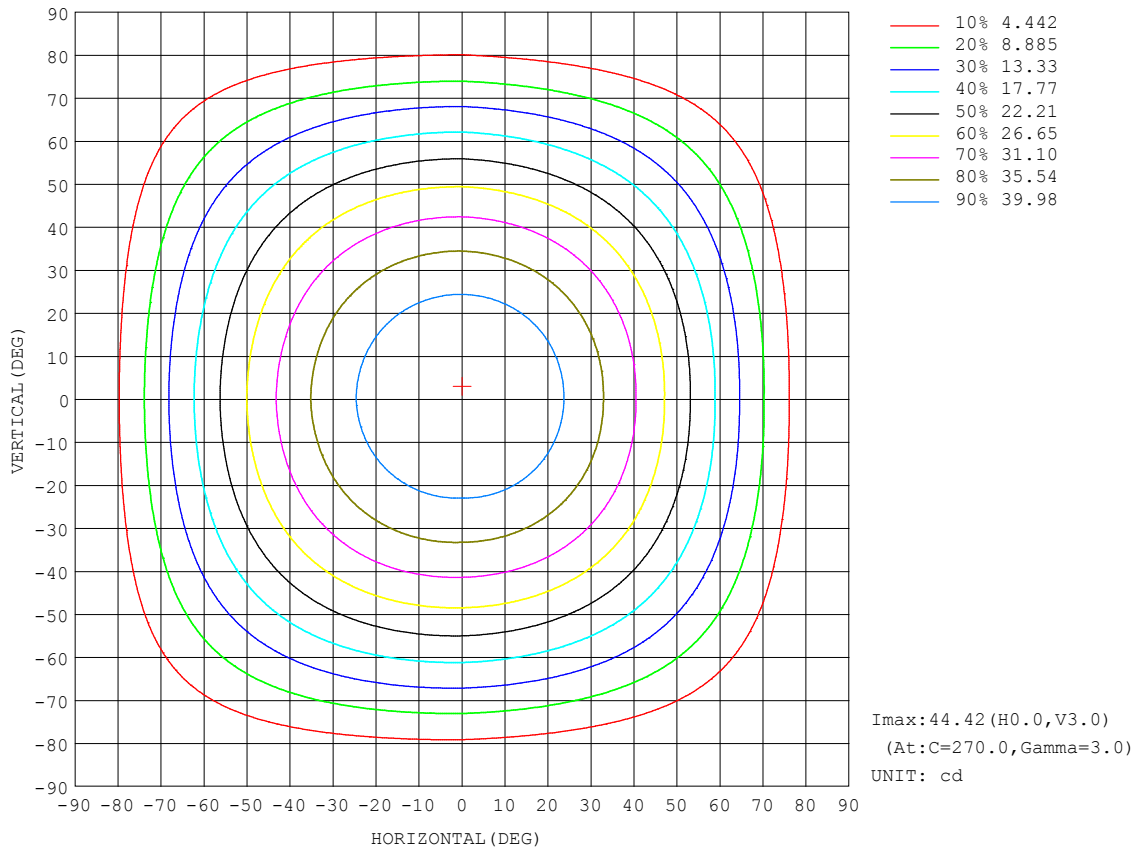


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2022-02-28

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:12.03V I:0.3641A P:2.721W PF:0.6213 Freq:59.99Hz Lamp Flux:122.445x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light	WEIGHT:
SPEC.:3W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

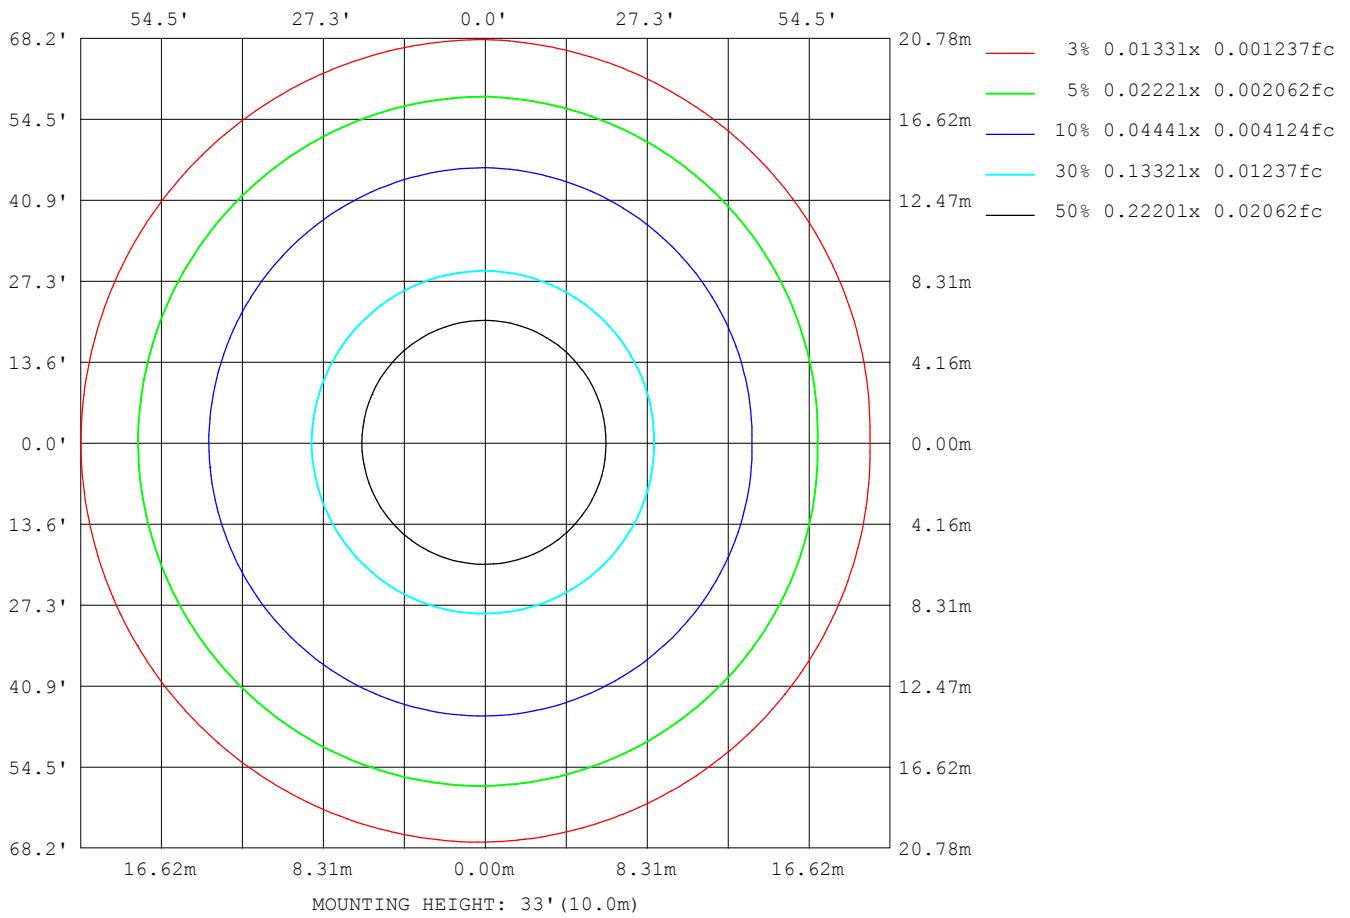

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

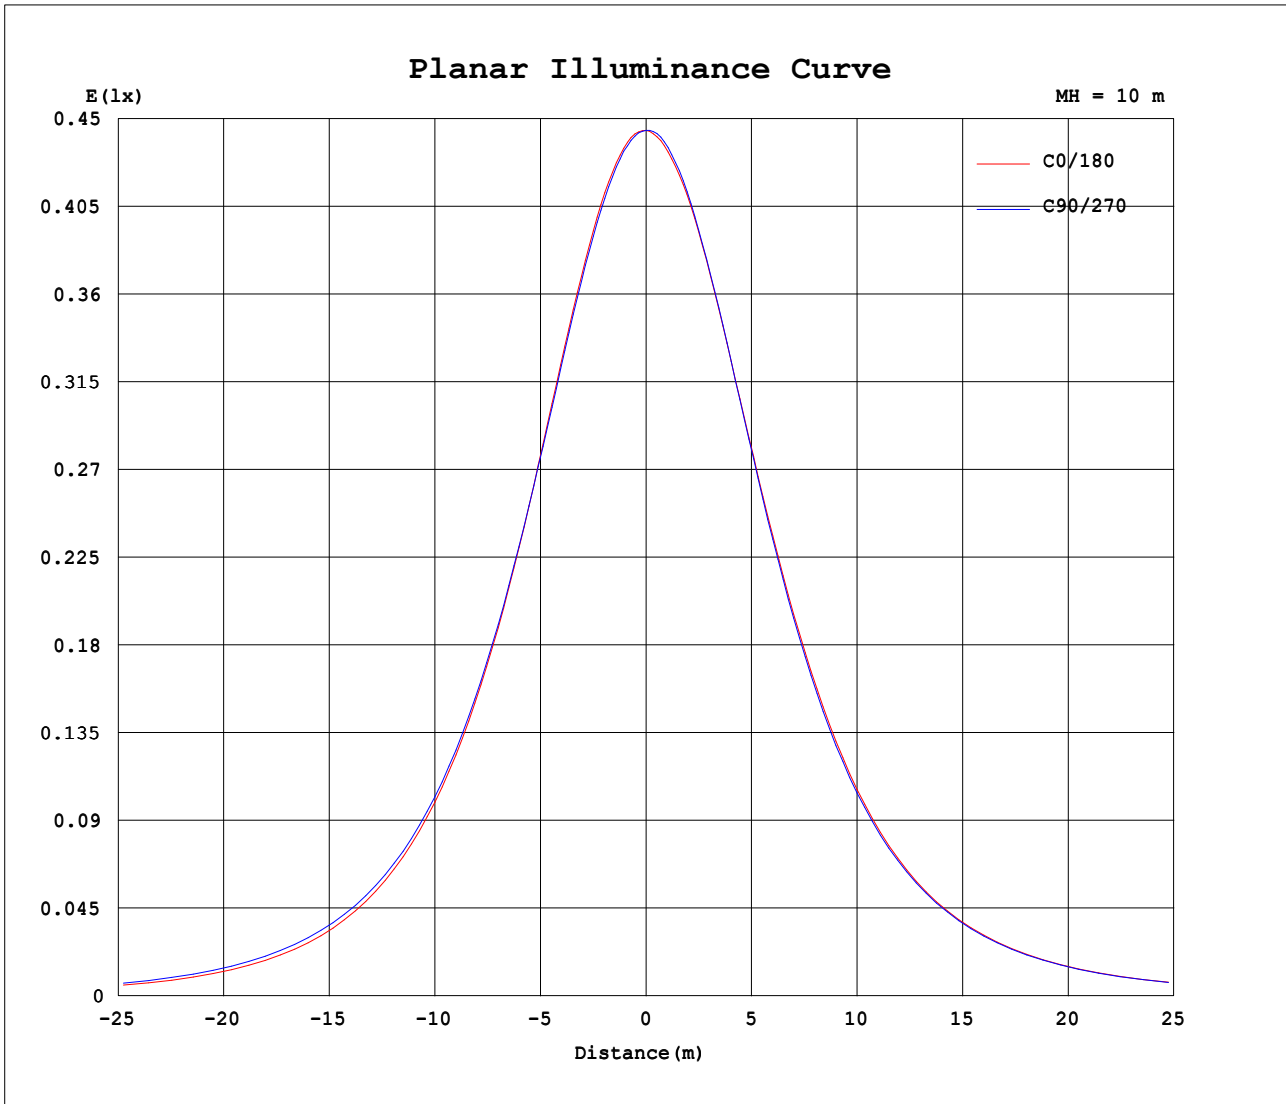


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.03V I:0.3641A P:2.721W PF:0.6213 Freq:59.99Hz Lamp Flux:122.445x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light	WEIGHT:
SPEC.:3W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

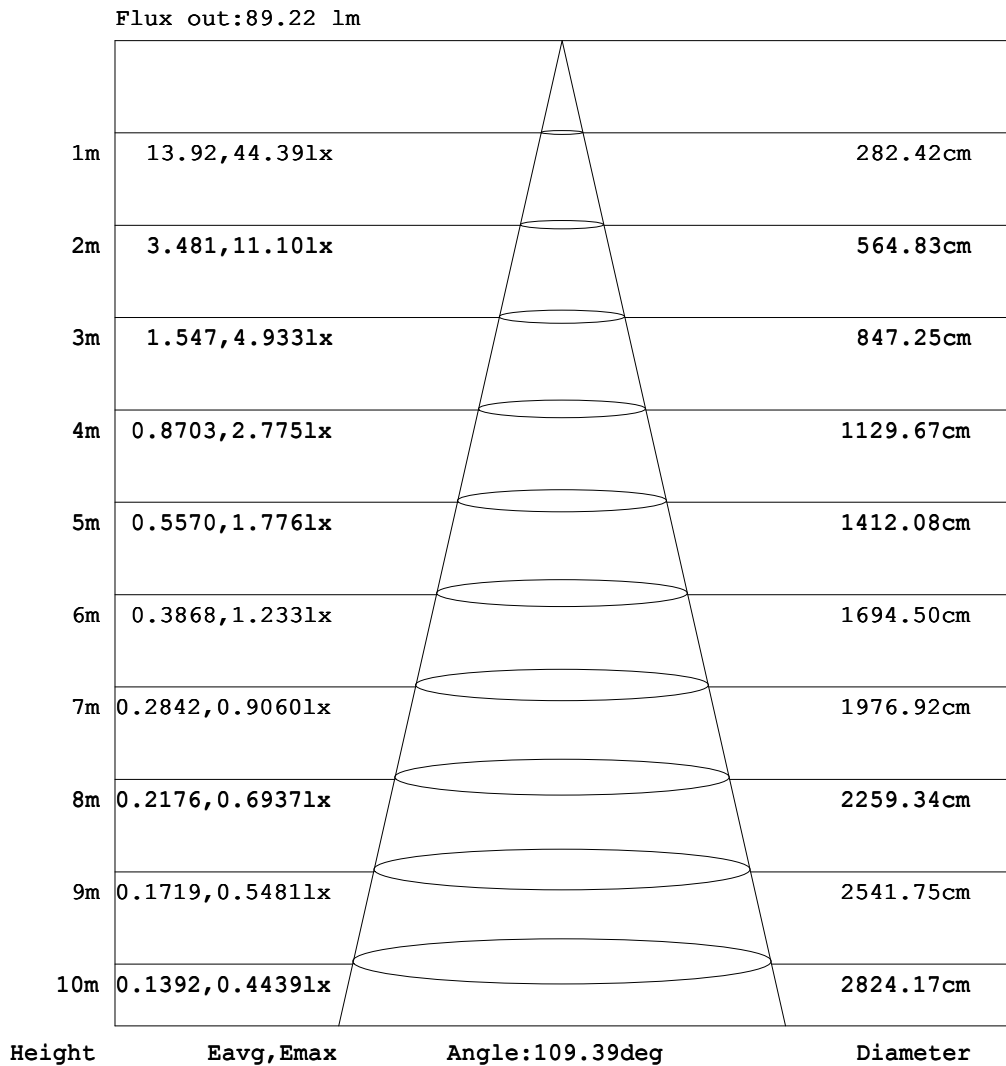

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.03V I:0.3641A P:2.721W PF:0.6213 Freq:59.99Hz Lamp Flux:122.445x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light	WEIGHT:
SPEC.:3W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.10	0.13	0.17	0.19	0.21	0.23	0.25	0.26
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.07	0.10	0.13	0.16	0.18	0.21	0.23	0.24
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.11	0.14	0.16	0.19	0.20	0.22
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.08	0.11	0.12	0.14	0.15	0.16
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.07	0.09	0.09	0.11	0.13	0.13
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.04	0.05	0.05	0.07	0.08
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.03	0.23	0.57	0.94	1.34	1.74	2.13	2.49	2.81	3.09	3.34	3.55	3.71	3.81	3.87	3.88
-70	0.00	0.00	0.21	0.99	1.96	2.97	4.01	5.04	6.03	6.98	7.85	8.63	9.34	9.93	10.4	10.8	11.0	11.2	11.2
-60	0.00	0.02	0.93	2.43	4.06	5.74	7.44	9.09	10.7	12.1	13.5	14.7	15.8	16.7	17.4	18.0	18.4	18.6	18.7
-50	0.00	0.13	1.78	3.88	6.15	8.47	10.8	13.0	15.0	17.0	18.7	20.3	21.8	23.0	24.0	24.8	25.3	25.6	25.7
-40	0.00	0.37	2.58	5.24	8.07	10.9	13.7	16.3	18.9	21.2	23.4	25.4	27.2	28.7	29.9	30.9	31.5	31.9	31.9
-30	0.00	0.61	3.25	6.38	9.67	12.9	16.1	19.1	22.1	24.8	27.4	29.7	31.7	33.4	34.8	35.8	36.6	37.0	37.1
-20	0.00	0.79	3.78	7.26	10.9	14.5	17.9	21.3	24.5	27.6	30.4	32.9	35.0	36.9	38.4	39.5	40.4	40.9	41.0
-10	0.00	0.90	4.12	7.81	11.6	15.4	19.1	22.6	26.1	29.3	32.3	34.9	37.1	39.0	40.6	41.9	42.8	43.3	43.5
0	0.00	0.94	4.24	8.00	11.9	15.8	19.5	23.1	26.7	30.0	33.0	35.6	37.9	39.8	41.4	42.7	43.6	44.1	44.4
10	0.00	0.91	4.13	7.83	11.7	15.4	19.1	22.7	26.1	29.4	32.3	35.0	37.2	39.2	40.7	42.0	43.0	43.5	43.8
20	0.00	0.80	3.80	7.30	10.9	14.5	18.0	21.4	24.6	27.7	30.5	33.0	35.2	37.1	38.6	39.8	40.7	41.3	41.5
30	0.00	0.62	3.28	6.44	9.74	13.0	16.2	19.3	22.2	25.0	27.6	29.9	32.0	33.7	35.1	36.2	37.0	37.5	37.6
40	0.00	0.39	2.62	5.31	8.16	11.0	13.8	16.5	19.0	21.4	23.7	25.7	27.5	29.0	30.3	31.3	32.0	32.4	32.5
50	0.00	0.14	1.82	3.96	6.26	8.61	10.9	13.1	15.3	17.2	19.0	20.7	22.1	23.4	24.4	25.2	25.8	26.2	26.3
60	0.00	0.03	0.98	2.51	4.17	5.90	7.63	9.31	10.9	12.4	13.8	15.1	16.2	17.1	17.9	18.5	18.9	19.2	19.3
70	0.00	0.01	0.25	1.06	2.07	3.12	4.20	5.27	6.30	7.28	8.19	9.01	9.75	10.4	10.9	11.3	11.6	11.8	11.9
80	0.00	0.00	0.01	0.08	0.31	0.68	1.09	1.53	1.97	2.39	2.79	3.15	3.47	3.75	4.00	4.20	4.35	4.44	4.48
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.08	0.11	0.13	0.13	0.12
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.08	0.13	0.14	0.15	0.15	0.15	0.14
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.09	0.13	0.15	0.16	0.18	0.20	0.20	0.18
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.10	0.13	0.17	0.19	0.21	0.23	0.25	0.27

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.03V I:0.3641A P:2.721W PF:0.6213 Freq:59.99Hz Lamp Flux:122.445x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Wall Light	WEIGHT:
SPEC.:3W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.28	0.24	0.20	0.17	0.14	0.13	0.13	0.13	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.24	0.22	0.19	0.17	0.15	0.14	0.14	0.12	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.22	0.20	0.18	0.15	0.14	0.14	0.13	0.10	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.16	0.16	0.15	0.14	0.13	0.12	0.09	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.13	0.12	0.12	0.11	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	3.73	3.53	3.29	3.00	2.66	2.31	1.92	1.53	1.13	0.79	0.51	0.32	0.17	0.07	0.02	0.00	0.00	0.00
-70	11.0	10.7	10.3	9.76	9.12	8.37	7.51	6.58	5.57	4.49	3.40	2.31	1.30	0.51	0.16	0.03	0.00	0.00
-60	18.5	18.1	17.5	16.8	15.8	14.7	13.5	12.1	10.6	8.98	7.29	5.53	3.74	2.05	0.65	0.09	0.00	0.00
-50	25.5	25.0	24.3	23.4	22.2	20.8	19.1	17.3	15.4	13.2	11.0	8.69	6.33	3.94	1.74	0.22	0.01	0.00
-40	31.7	31.2	30.4	29.3	27.9	26.2	24.3	22.1	19.6	17.1	14.3	11.5	8.63	5.74	2.91	0.60	0.02	0.00
-30	36.9	36.4	35.5	34.3	32.7	30.8	28.5	26.0	23.2	20.2	17.1	13.8	10.5	7.22	3.93	1.05	0.02	0.00
-20	40.9	40.3	39.4	38.0	36.3	34.2	31.8	29.0	26.0	22.6	19.1	15.6	11.9	8.29	4.71	1.43	0.02	0.00
-10	43.3	42.8	41.8	40.5	38.6	36.3	33.7	30.8	27.6	24.1	20.4	16.6	12.8	8.93	5.17	1.67	0.01	0.00
0	44.3	43.7	42.8	41.3	39.5	37.1	34.4	31.4	28.1	24.6	20.7	16.9	13.0	9.09	5.28	1.72	0.00	0.00
10	43.6	43.0	42.0	40.6	38.7	36.4	33.8	30.9	27.7	24.2	20.4	16.6	12.8	8.95	5.18	1.68	0.01	0.00
20	41.3	40.7	39.7	38.3	36.5	34.4	31.9	29.2	26.1	22.7	19.2	15.7	12.0	8.34	4.75	1.46	0.02	0.00
30	37.4	36.8	35.9	34.6	33.0	31.0	28.8	26.2	23.4	20.4	17.2	14.0	10.6	7.30	3.98	1.08	0.03	0.00
40	32.2	31.7	30.9	29.7	28.3	26.5	24.6	22.3	19.8	17.2	14.5	11.6	8.75	5.83	2.98	0.64	0.03	0.00
50	26.0	25.5	24.8	23.8	22.6	21.1	19.5	17.6	15.6	13.5	11.2	8.86	6.47	4.05	1.82	0.26	0.03	0.00
60	19.0	18.6	18.0	17.2	16.3	15.1	13.8	12.4	10.9	9.23	7.51	5.71	3.89	2.16	0.73	0.14	0.02	0.00
70	11.6	11.3	10.8	10.2	9.56	8.78	7.89	6.93	5.87	4.76	3.63	2.50	1.44	0.62	0.23	0.07	0.01	0.00
80	4.30	4.07	3.78	3.45	3.08	2.69	2.26	1.83	1.39	1.01	0.69	0.46	0.28	0.15	0.06	0.01	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.03	0.03	0.04	0.04	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.13	0.13	0.12	0.09	0.08	0.07	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.15	0.14	0.14	0.13	0.13	0.11	0.10	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.19	0.20	0.17	0.15	0.14	0.13	0.12	0.11	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.28	0.24	0.20	0.17	0.14	0.13	0.13	0.13	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: